



Arduino

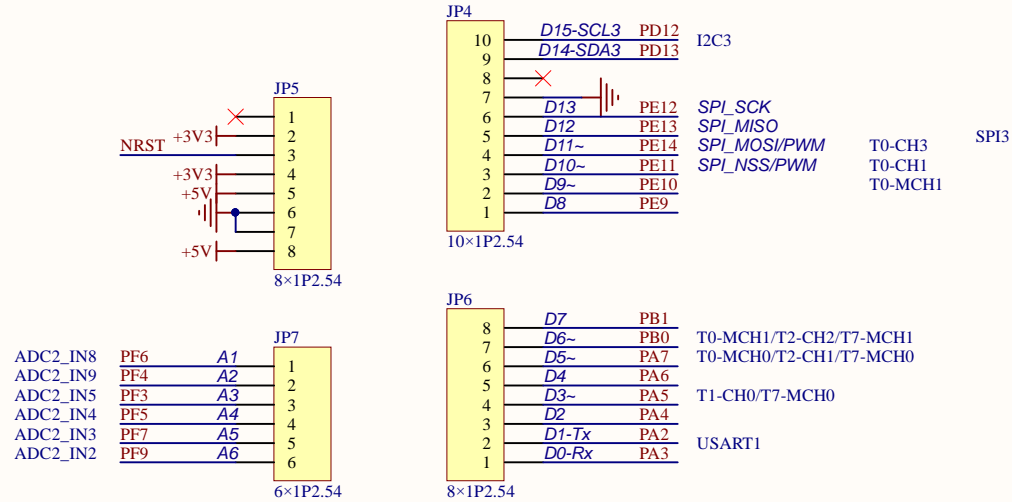


Company Name: GigaDevice		
File Name: Arduino		
Revision: 1.5	Date: 2024-12	Author: yihao.wu





LED

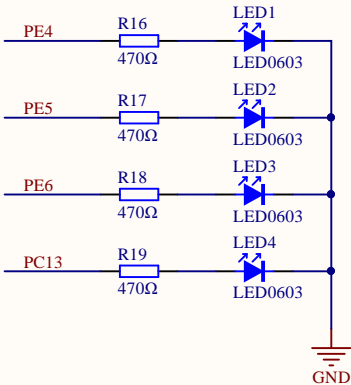

KEY



Extension Pin

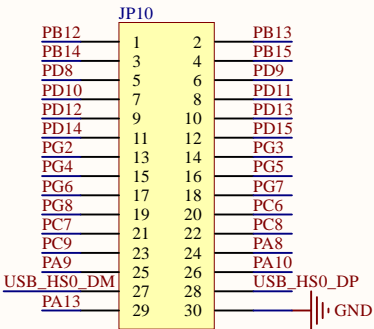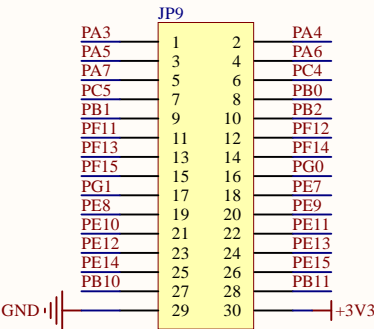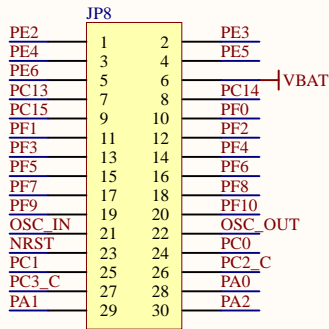

Company Name: GigaDevice

File Name: Extension

Revision: 1.5

Date: 2024-12






Author: yihao.wu

1

2

3

4

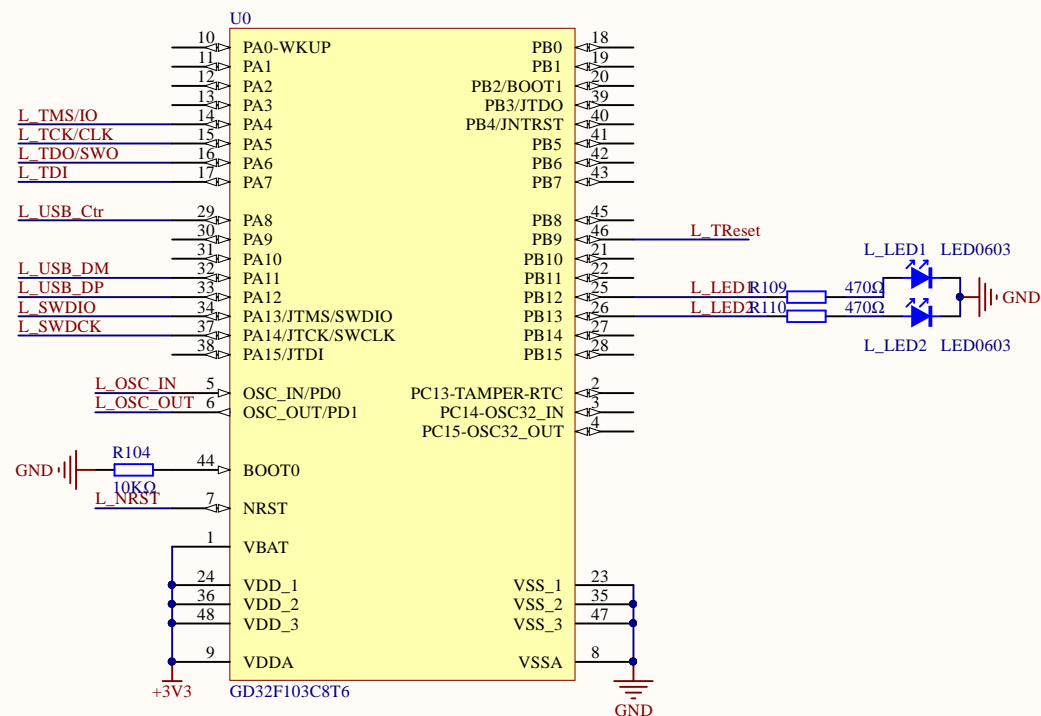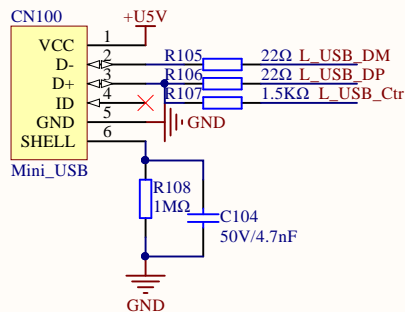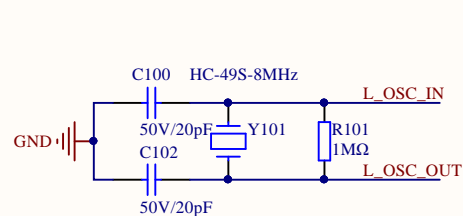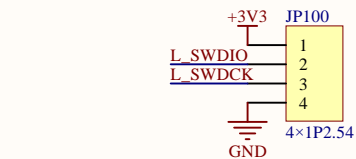

Company Name: GigaDevice

File Name: GDLink

Revision: 1.5

Date: 2024-12


Author: yihao.wu



1

2


3

4

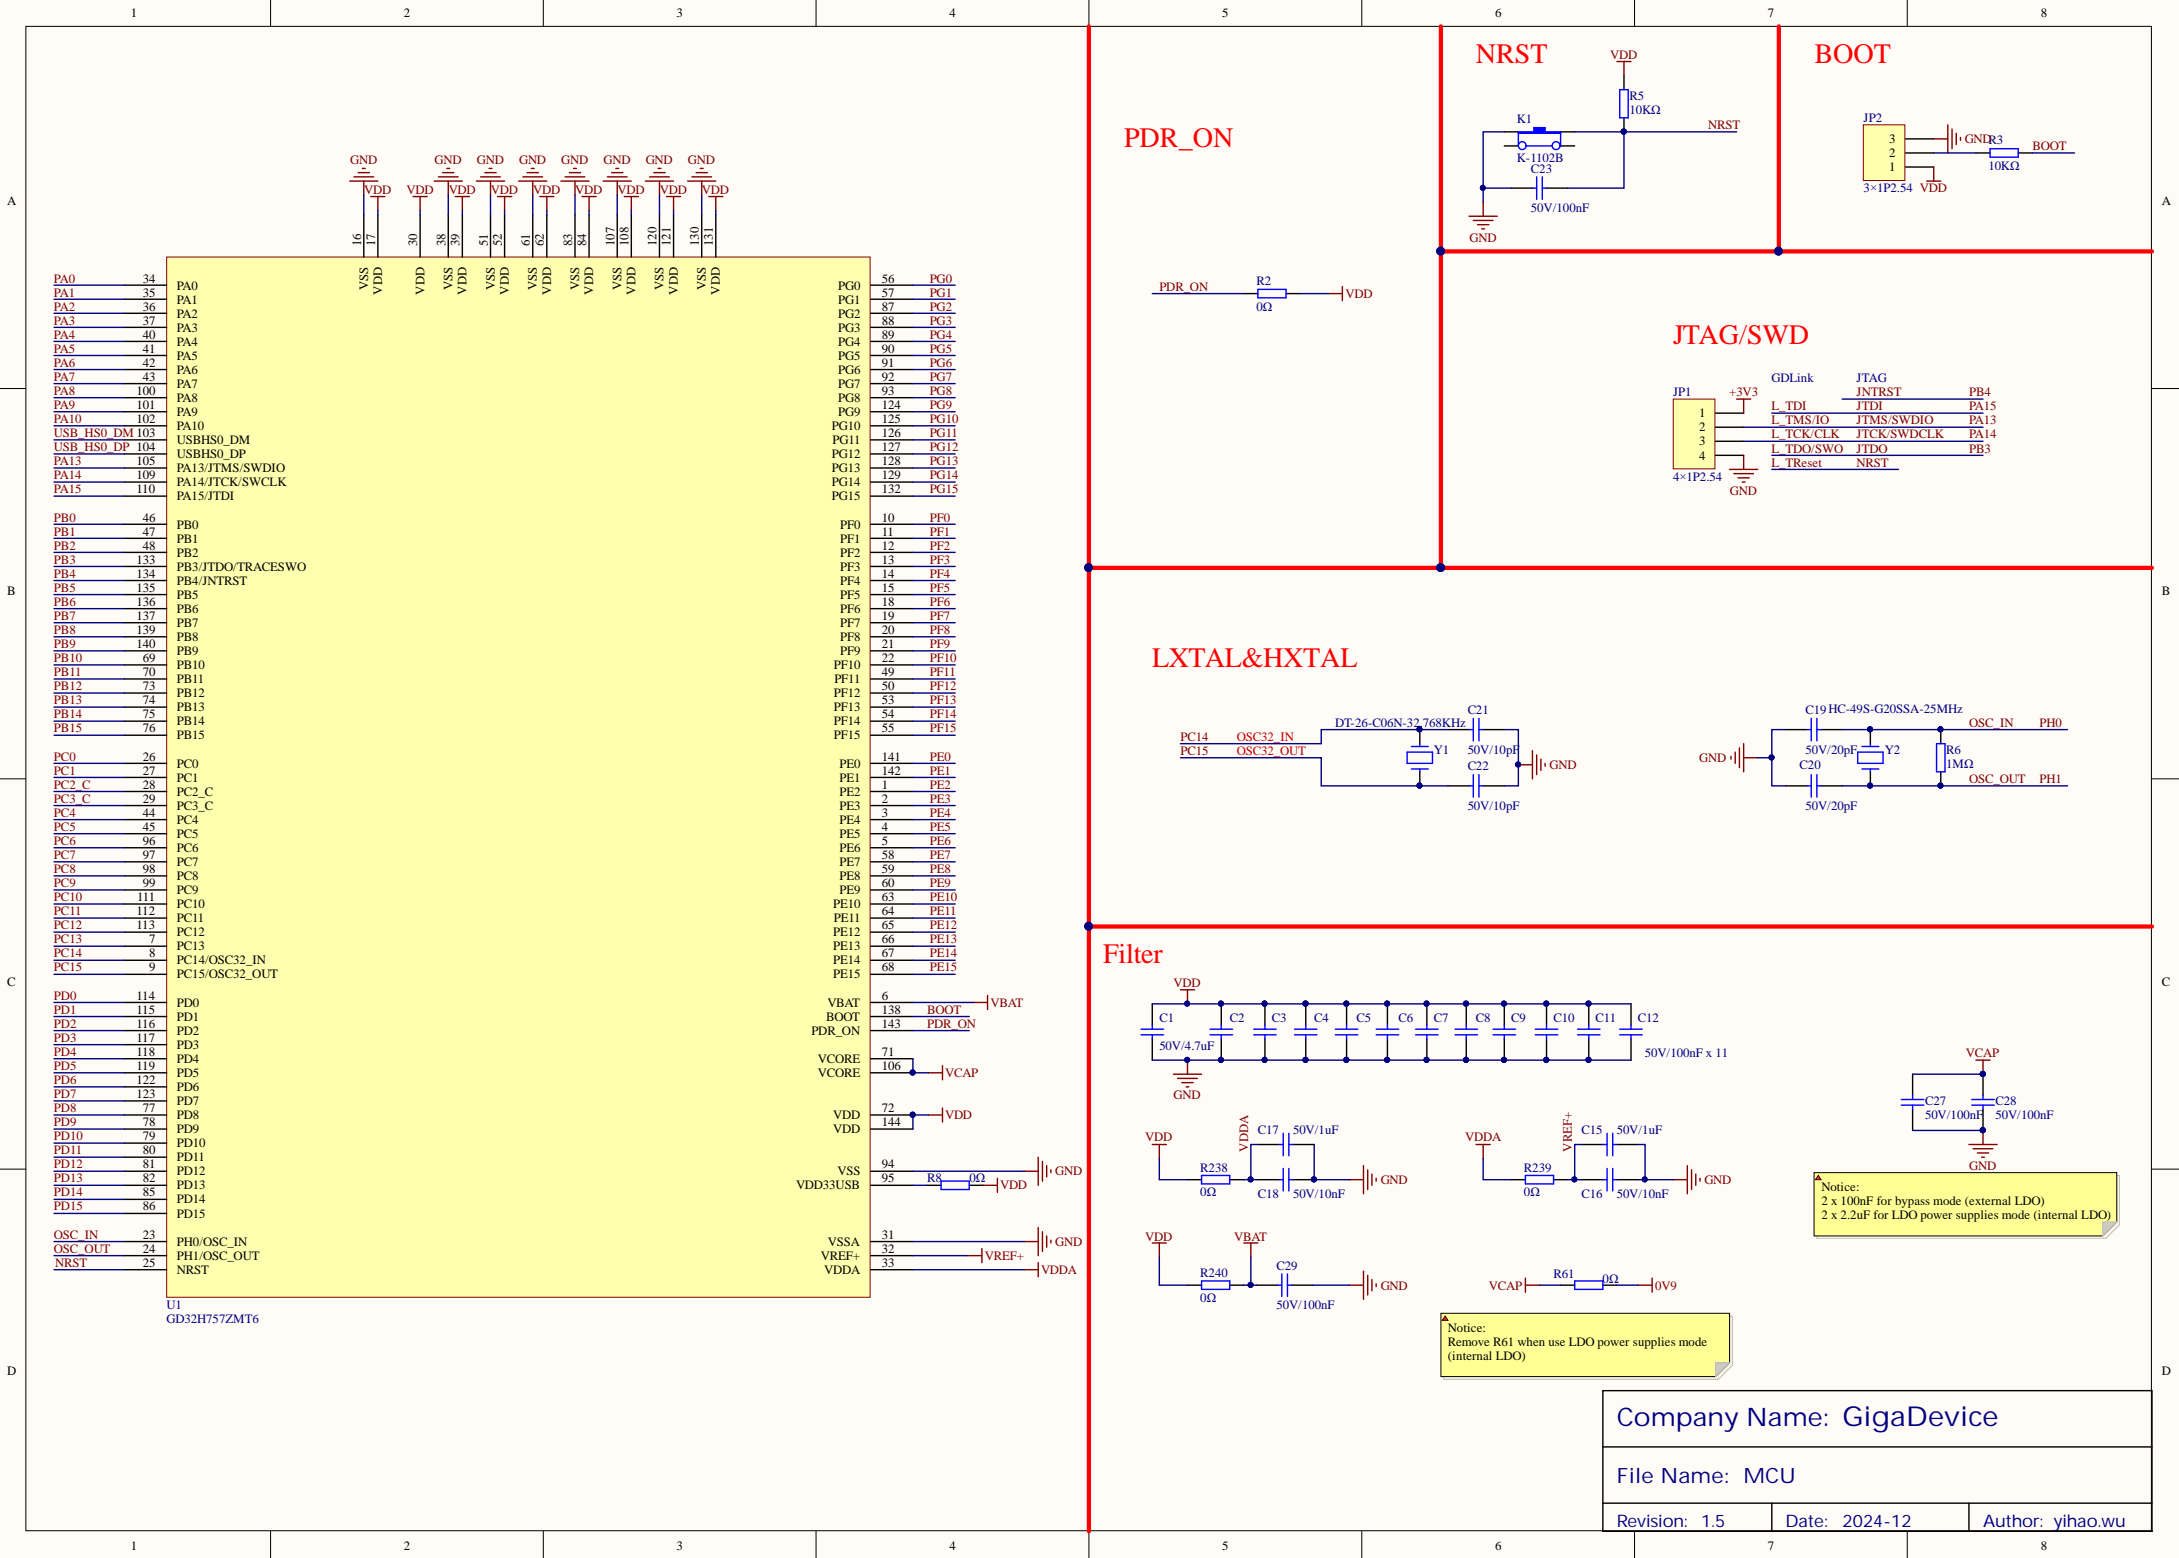

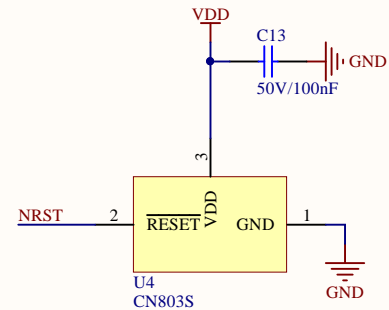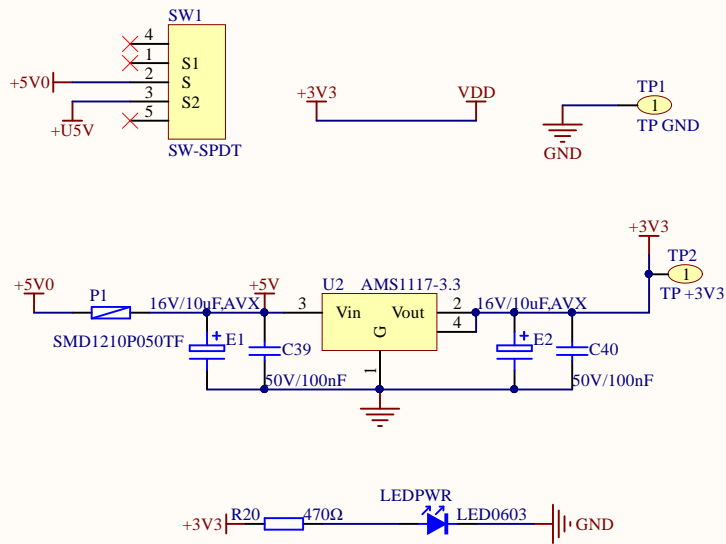


注意:复位芯片需要选用开漏型

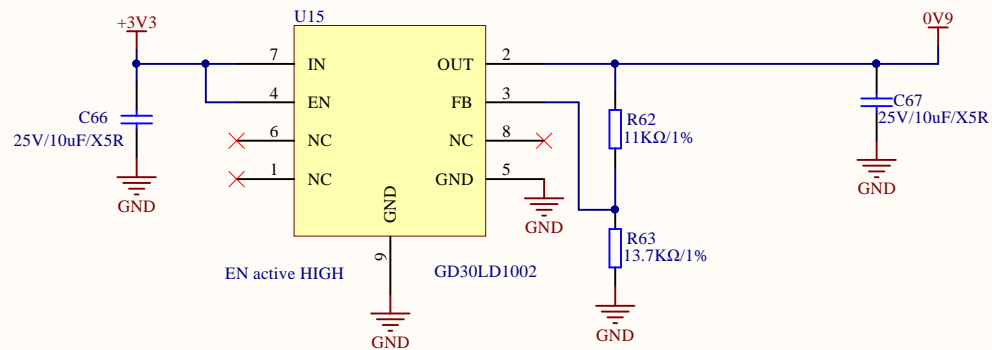

Company Name: GigaDevice		
File Name: Power		
Revision: 1.5	Date: 2024-12	Author: yihao.wu

USART0 To USB

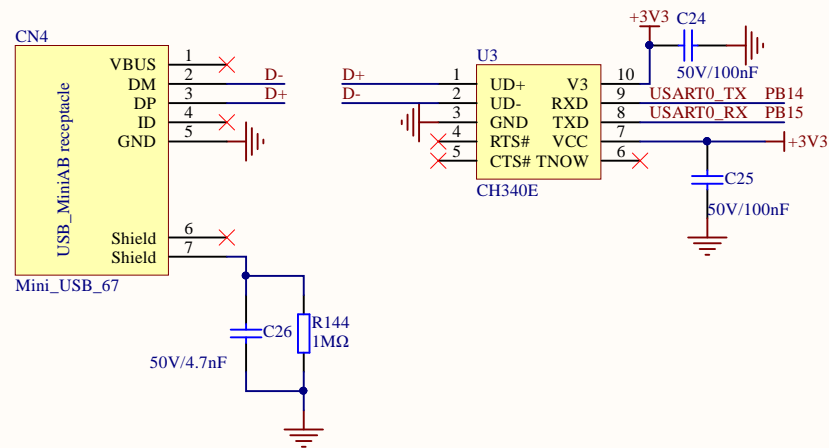



Company Name: GigaDevice

File Name: USART

Revision: 1.5

Date: 2024-12

Author: yihao.wu

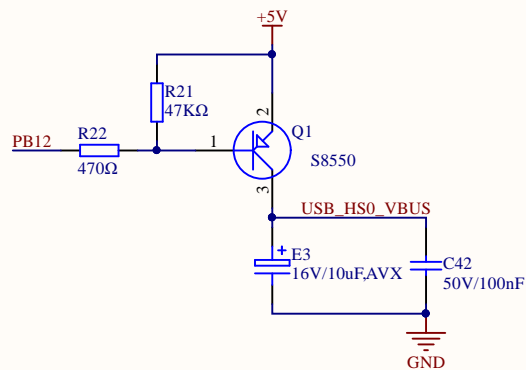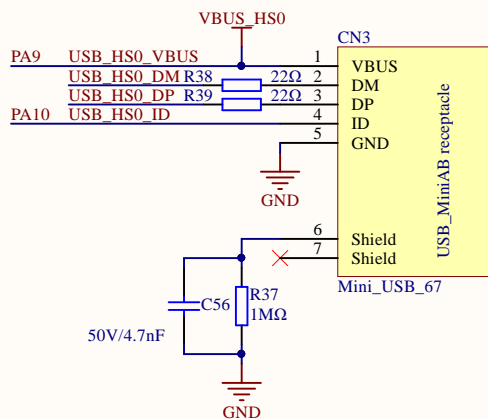

VBUS enable while PB12 with LOW level.

Company Name: GigaDevice		
File Name: USB		
Revision: 1.5	Date: 2024-12	Author: yihao.wu

