GigaDevice Semiconductor Inc.

GD32E503xx
Arm® Cortex®-M33 32-bit MCU

Datasheet

Revision 2.6

(Aug. 2026)

Table of Contents

Table of Contents 1
List of Figures 4
List of Tables 5
1. General description 7
2. Device overview 8
2.1. Device information 8
2.2. Block diagram 9
2.3. Pinouts and pin assignment 10
2.4. Memory map 14
2.5. Clock tree 18
2.6. Pin definitions 19
2.6.1. GD32E503Zx LQFP144 pin definitions 19
2.6.2. GD32E503Vx LQFP100 pin definitions 28
2.6.3. GD32E503Rx LQFP64 pin definitions 35
2.6.4. GD32E503Cx LQFP48 pin definitions 40
2.6.5. GD32E503CEO7 QFN48 pin definitions 43
3. Functional description 47
3.1. Arm® Cortex®-M33 core 47
3.2. Embedded memory 47
3.3. Clock, reset and supply management 48
3.4. Boot modes 48
3.5. Power saving modes 49
3.6. Analog to digital converter (ADC) 50
3.7. Digital to analog converter (DAC) 50
3.8. DMA 51
3.9. General-purpose inputs/outputs (GPIOs) 51
3.10. Timers and PWM generation 51
3.11. Real time clock (RTC) 52
3.12. Inter-integrated circuit (I2C) 53
3.13. Serial peripheral interface (SPI) 53
3.14. Universal synchronous asynchronous receiver transmitter (USART) 54

3.15. Inter-IC sound (I2S) 54
3.16. Universal Serial Bus full-speed device interface (USBD) 54
3.17. Controller area network (CAN) 55
3.18. External memory controller (EXMC) 55
3.19. Secure digital input/output interface (SDIO) 55
3.20. Comparators (CMP) 55
3.21. Super High-Resolution Timer (SHRTIMER) 56
3.22. Serial/Quad Parallel Interface (SQPI) 56
3.23. Debug mode 56
3.24. Package and operation temperature 56
4. Electrical characteristics 58
4.1. Absolute maximum ratings 58
4.2. Operating conditions characteristics 59
4.3. Power consumption 60
4.4. EMC characteristics 67
4.5. Power supply supervisor characteristics 67
4.6. Electrical sensitivity 68
4.7. External clock characteristics 69
4.8. Internal clock characteristics 71
4.9. PLL characteristics 73
4.10. Memory characteristics 74
4.11. NRST pin characteristics 74
4.12. GPIO characteristics 75
4.13. Temperature sensor characteristics 76
4.14. ADC characteristics 77
4.15. DAC characteristics 80
4.16. I2C characteristics 81
4.17. SPI characteristics 82
4.18. I2S characteristics 84
4.19. USART characteristics 86
4.20. USBD characteristics 86
4.21. SDIO characteristics 87

4.22. EXMC characteristics 87
4.23. Serial/Quad Parallel Interface (SQPI) characteristics 91
4.24. Super High-resolution Timer (SHRTIMER) characteristics 91
4.25. TIMER characteristics 93
4.26. WDGT characteristics 94
4.27. Parameter condition 94
5. Package information 95
5.1. LQFP144 package outline dimensions 95
5.2. LQFP100 package outline dimensions 97
5.3. LQFP64 package outline dimensions 99
5.4. LQFP48 package outline dimensions 101
5.5. QFN48 package outline dimensions 103
5.6. Thermal characteristics 105
6. Ordering information 107
7. Revision history 108

List of Figures

Figure 2-1. GD32E503xx block diagram 9
Figure 2-2. GD32E503Zx LQFP144 pinouts 10
Figure 2-3. GD32E503Vx LQFP100 pinouts 11
Figure 2-4. GD32E503Rx LQFP64 pinouts 12
Figure 2-5. GD32E503Cx LQFP48 pinouts 12
Figure 2-6. GD32E503CEO7 QFN48 pinouts 13
Figure 2-7. GD32E503xx clock tree 18
Figure 4-1. Recommended power supply decoupling capacitors(1)(2) 59
Figure 4-2. Typical supply current consumption in Run mode 66
Figure 4-3. Typical supply current consumption in Sleep mode 66
Figure 4-4. Recommended external NRST pin circuit(1) 75
Figure 4-5. I/O port AC characteristics definition 76
Figure 4-6. I2C bus timing diagram 81
Figure 4-7. SPI timing diagram - master mode 82
Figure 4-8. SPI timing diagram - slave mode 83
Figure 4-9. I2S timing diagram - master mode 85
Figure 4-10. I2S timing diagram - slave mode 85
Figure 4-11. USBD timings: definition of data signal rise and fall time 86
Figure 5-1. LQFP144 package outline 95
Figure 5-2. LQFP144 recommended footprint 96
Figure 5-3. LQFP100 package outline 97
Figure 5-4. LQFP100 recommended footprint 98
Figure 5-5. LQFP64 package outline 99
Figure 5-6. LQFP64 recommended footprint 100
Figure 5-7. LQFP48 package outline 101
Figure 5-8. LQFP48 recommended footprint 102
Figure 5-9. QFN48 package outline 103
Figure 5-10. QFN48 recommended footprint 104

List of Tables

Table 2-1. GD32E503xx devices features and peripheral list 8
Table 2-2. GD32E503xx memory map 14
Table 2-3. GD32E503Zx LQFP144 pin definitions 19
Table 2-4. GD32E503Vx LQFP100 pin definitions 28
Table 2-5. GD32E503Rx LQFP64 pin definitions 35
Table 2-6. GD32E503Cx LQFP48 pin definitions 40
Table 2-7. GD32E503CEO7 QFN48 pin definitions 43
Table 4-1. Absolute maximum ratings(1)(4) 58
Table 4-2. DC operating conditions 59
Table 4-3. Clock frequency(1) 59
Table 4-4. Operating conditions at Power up/ Power down(1) 60
Table 4-5. Start-up timings of Operating conditions(1)(2)(3) 60
Table 4-6. Power saving mode wakeup timings characteristics(1)(2) 60
Table 4-7. Power consumption characteristics(2)(3)(4)(5)(6) 60
Table 4-8. EMS characteristics(1) 67
Table 4-9. EMI characteristics(1) 67
Table 4-10. Power supply supervisor characteristics 67
Table 4-11. ESD characteristics(1) 69
Table 4-12. Static latch-up characteristics(1) 69
Table 4-13. High speed external clock (HXTAL) generated from a crystal/ceramic characteristics 69
Table 4-14. High speed external clock characteristics (HXTAL in bypass mode) 69
Table 4-15. Low speed external clock (LXTAL) generated from a crystal/ceramic characteristics 70
Table 4-16. Low speed external user clock characteristics (LXTAL in bypass mode) 71
Table 4-17. High speed internal clock (IRC8M) characteristics 71
Table 4-18. Low speed internal clock (IRC40K) characteristics 72
Table 4-19. High speed internal clock (IRC48M) characteristics 72
Table 4-20. PLL characteristics 73
Table 4-21. PLL spread spectrum clock generation (SSCG) characteristics(1) 73
Table 4-22. Flash memory characteristics(1) 74
Table 4-23. NRST pin characteristics 74
Table 4-24. I/O port DC characteristics(1)(3) 75
Table 4-25. I/O port AC characteristics(1)(2) 76
Table 4-26. Temperature sensor characteristics(1) 76
Table 4-27. ADC characteristics 77
Table 4-28. ADC R_{AIN} max for f_{ADC} = 35 MHz 78
Table 4-29. ADC dynamic accuracy at f_{ADC} = 14 MHz V_{DDA} = 1.8 V(1) 78
Table 4-30. ADC dynamic accuracy at f_{ADC} = 35 MHz V_{DDA} = 3.3 V(1) 78
Table 4-31. ADC dynamic accuracy at f_{ADC} = 35 MHz V_{DDA} = 2.4 V(1) 78
Table 4-32. ADC static accuracy at f_{ADC} = 14 MHz V_{DDA} = 1.8 V(1) 79
Table 4-33. ADC static accuracy at f_{ADC} = 35 MHz V_{DDA} = 3.3 V(1) 79
Table 4-34. ADC static accuracy at f_{ADC} = 35 MHz V_{DDA} = 2.4 V(1) 79

Table 4-35. DAC characteristics 80
Table 4-36. I2C characteristics(1)(2) 81
Table 4-37. I2C analog filter delay characteristics(1) 81
Table 4-38. Standard SPI characteristics(1) 82
Table 4-39. I2S characteristics(1)(2) 84
Table 4-40. USART characteristics(1) 86
Table 4-41. USBD start up time 86
Table 4-42. USBD DC electrical characteristics 86
Table 4-43. USBD full speed-electrical characteristics(1) 86
Table 4-44. SDIO characteristics(1)(2) 87
Table 4-45. Asynchronous non-multiplexed SRAM/PSRAM/NOR read timings(1)(2)(3) 87
Table 4-46. Asynchronous non-multiplexed SRAM/PSRAM/NOR write timings(1)(2)(3) 88
Table 4-47. Asynchronous multiplexed PSRAM/NOR read timings(1)(2)(3) 88
Table 4-48. Asynchronous multiplexed PSRAM/NOR write timings (1)(2)(3) 88
Table 4-49. Synchronous multiplexed PSRAM/NOR read timings(1)(2)(3) 89
Table 4-50. Synchronous multiplexed PSRAM write timings(1)(2)(3) 89
Table 4-51. Synchronous non-multiplexed PSRAM/NOR read timings(1)(2)(3) 90
Table 4-52. Synchronous non-multiplexed PSRAM write timings(1)(2)(3) 90
Table 4-53.SQPI characteristics 91
Table 4-54. SHRTIMER characteristics(1) 91
Table 4-55. SHRTIMER output response to fault protection(1) 92
Table 4-56. SHRTIMER output response to external 1 to 10(Synchronous mode(1)) 92
Table 4-57. SHRTIMER synchronization input / output(1) 93
Table 4-58. TIMER characteristics(1) 93
Table 4-59. FWDGT min/max timeout period at 40 kHz (IRC40K)(1) 94
Table 4-60. WWDGT min-max timeout value at 90 MHz (f_{PCLK1})(1) 94
Table 5-1. LQFP144 package dimensions 95
Table 5-2. LQFP100 package dimensions 97
Table 5-3. LQFP64 package dimensions 99
Table 5-4. LQFP48 package dimensions 101
Table 5-5. QFN48 package dimensions 103
Table 5-6. Package thermal characteristics(1) 105
Table 6-1. Part ordering code for GD32E503xx devices 107
Table 7-1. Revision history 108

1. General description

The GD32E503xx device belongs to the high performance line of GD32 MCU family. It is a new 32-bit general-purpose microcontroller based on the Arm® Cortex®-M33 core. The Cortex®-M33 processor is a 32-bit processor that possesses low interrupt latency and low-cost debug. The characteristics of integrated and advanced make the Cortex®-M33 processor suitable for market products that require microcontrollers with high performance and low power consumption. The processor is based on the ARMv8 architecture and supports a powerful and scalable instruction set including general data processing I/O control tasks, advanced data processing bit field manipulations and DSP.

The GD32E503xx device incorporates the Arm® Cortex®-M33 32-bit processor core operating at up to 180 MHz frequency with Flash accesses 0~4 waiting time to obtain maximum efficiency. It provides up to 512 KB embedded Flash memory and up to 128 KB SRAM memory. An extensive range of enhanced I/Os and peripherals connected to two APB buses. The devices offer three 12-bit ADCs, two DACs, three comparators, up to nine general 16-bit timers, a general 32-bit timer, two basic timers, two PWM advanced timers, as well as standard and advanced communication interfaces: up to three SPIs, three I2Cs, six USARTs, two I2Ss, a SDIO, an USBD and two CANs. Additional peripherals as super high-resolution Timer (SHRTIMER), EXMC interface, Serial/Quad Parallel Interface (SQPI) are included.

The device operates from a 1.71 to 3.63 V power supply and available in -40 to +85 °C temperature range for grade 6 devices, -40 to +105°C temperature range for grade 7 devices. Several power saving modes provide the flexibility for maximum optimization between wakeup latency and power consumption, an especially important consideration in low power applications.

The above features make the GD32E503xx devices suitable for a wide range of applications, especially in areas such as industrial control, motor drives, user interface, power monitor and alarm systems, consumer and handheld equipment, gaming and GPS, E-bike, optical module and so on.



2. Device overview


2.1. Device information

Table 2-1. GD32E503xx devices features and peripheral list

Part Number		GD32E503xx								
		CEO7	CC	CE	RC	RE	VC	VE	ZC	ZE
FLASH (KB)		512	256	512	256	512	256	512	256	512
SRAM (KB)		128	96	128	96	128	96	128	96	128
Timers	General timer(16-bit)	9 (2-4,8-13)	3 (2-4)	9 (2-4,8-13)	3 (2-4)	9 (2-4,8-13)	3 (2-4)	9 (2-4,8-13)	3 (2-4)	9 (2-4,8-13)
	General timer(32-bit)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)	1 (1)
	Advanced timer(16-bit)	1 (0)	1 (0)	1 (0)	2 (0,7)	2 (0,7)	2 (0,7)	2 (0,7)	2 (0,7)	2 (0,7)
	SysTick	1	1	1	1	1	1	1	1	1
	Basic timer(16-bit)	2 (5-6)	2 (5-6)	2 (5-6)	2 (5-6)	2 (5-6)	2 (5-6)	2 (5-6)	2 (5-6)	2 (5-6)
	SHRTIMER	1	1	1	1	1	1	1	1	1
	Watchdog	2	2	2	2	2	2	2	2	2
	RTC	1	1	1	1	1	1	1	1	1
Connectivity	USART	3 (0-2)	3 (0-2)	3 (0-2)	4 (0-2,5)	4 (0-2,5)	4 (0-2,5)	4 (0-2,5)	4 (0-2,5)	4 (0-2,5)
	UART	0	0	0	2 (3-4)	2 (3-4)	2 (3-4)	2 (3-4)	2 (3-4)	2 (3-4)
	I2C	3 (0-2)	3 (0-2)	3 (0-2)	3 (0-2)	3 (0-2)	3 (0-2)	3 (0-2)	3 (0-2)	3 (0-2)
	SPI/I2S	3/2 (0-2)/(1-2)	3/2 (0-2)/(1-2)	3/2 (0-2)/(1-2)	3/2 (0-2)/(1-2)	3/2 (0-2)/(1-2)	3/2 (0-2)/(1-2)	3/2 (0-2)/(1-2)	3/2 (0-2)/(1-2)	3/2 (0-2)/(1-2)
	SDIO	0	0	0	1	1	1	1	1	1
	CAN	2 (0-1)	2 (0-1)	2 (0-1)	2 (0-1)	2 (0-1)	2 (0-1)	2 (0-1)	2 (0-1)	2 (0-1)
	USBD	1	1	1	1	1	1	1	1	1
GPIO		35	37	37	51	51	80	80	112	112
EXMC		0	0	0	0	0	1	1	1	1
DAC	Units	1	1	1	1	1	1	1	1	1
	Channels	2	2	2	2	2	2	2	2	2
CMP		3	0	0	0	0	0	0	0	0
ADC	Units	3	3	3	3	3	3	3	3	3
	Channels	10	10	10	16	16	16	16	21	21
Package		QFN48	LQFP48		LQFP64		LQFP100		LQFP144	

2.2. Block diagram

Figure 2-1. GD32E503xx block diagram

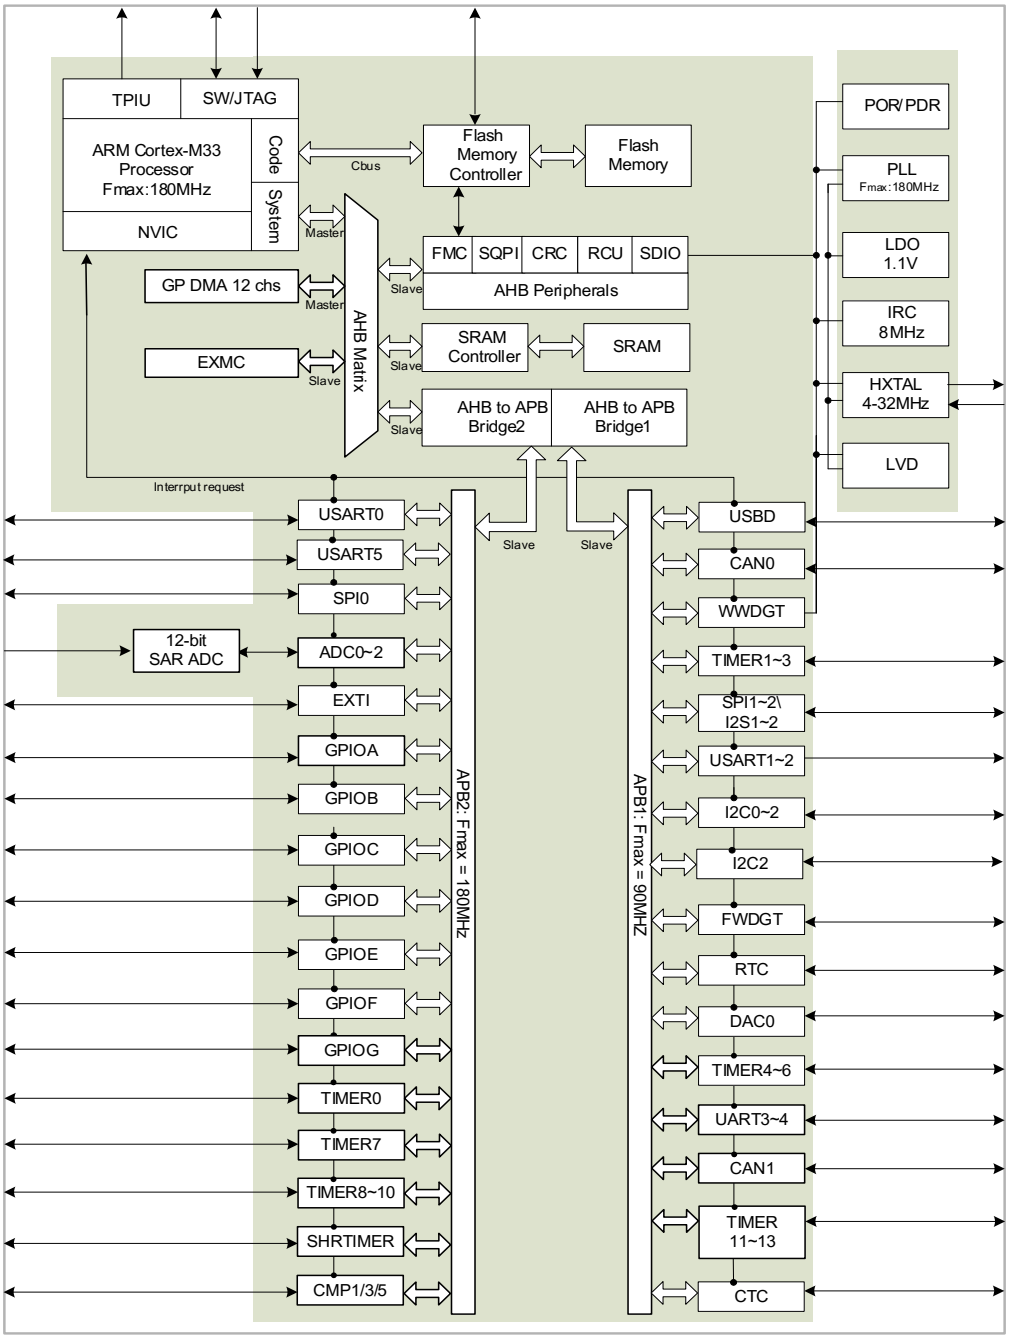

2.3. Pinouts and pin assignment

Figure 2-2. GD32E503Zx LQFP144 pinouts



Figure 2-3. GD32E503Vx LQFP100 pinouts

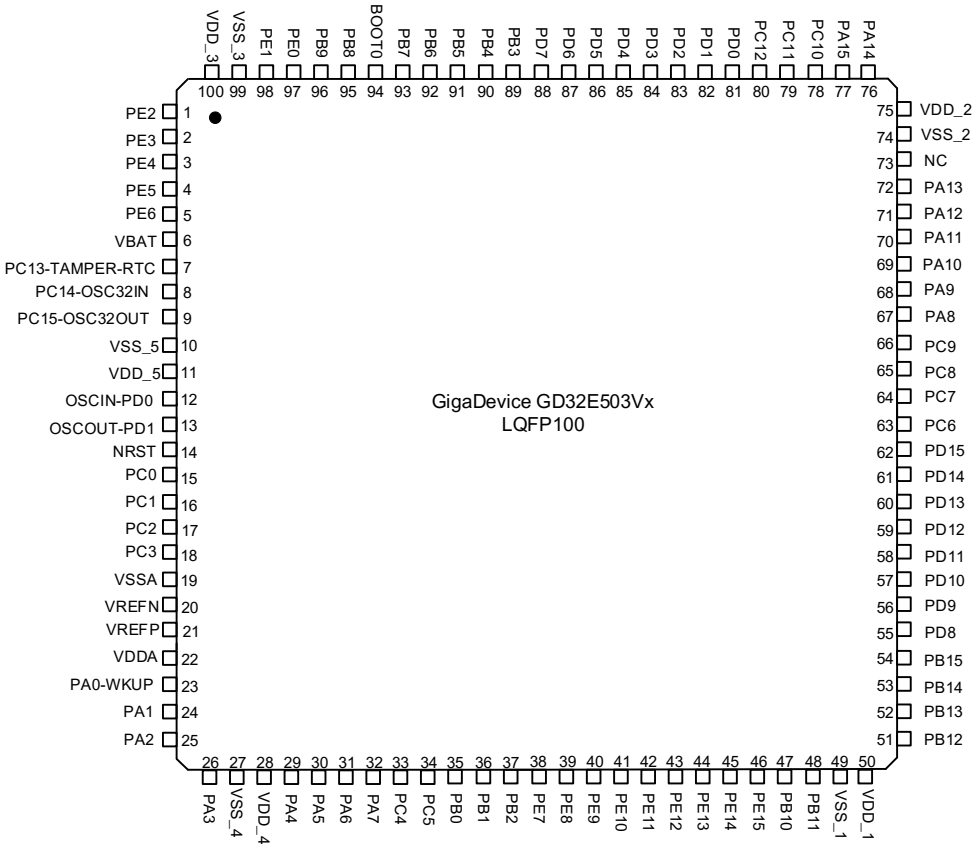


Figure 2-4. GD32E503Rx LQFP64 pinouts

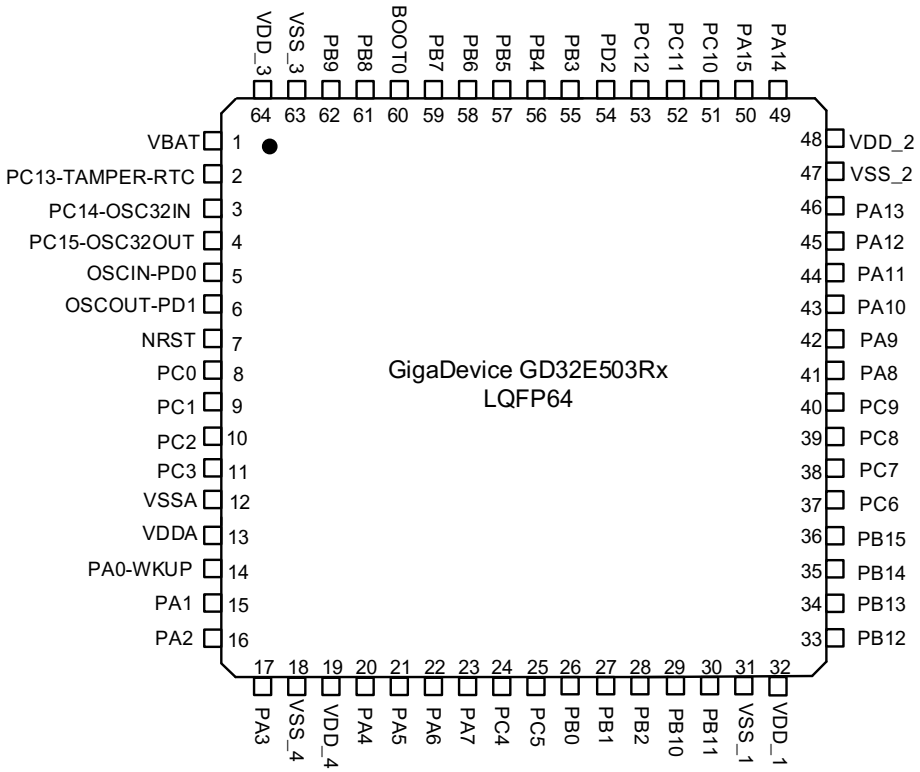


Figure 2-5. GD32E503Cx LQFP48 pinouts


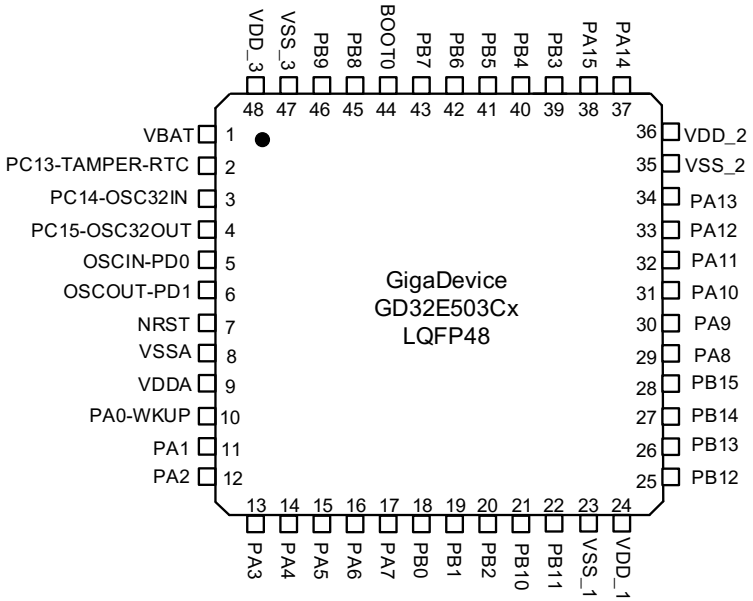


Figure 2-6. GD32E503CEO7 QFN48 pinouts

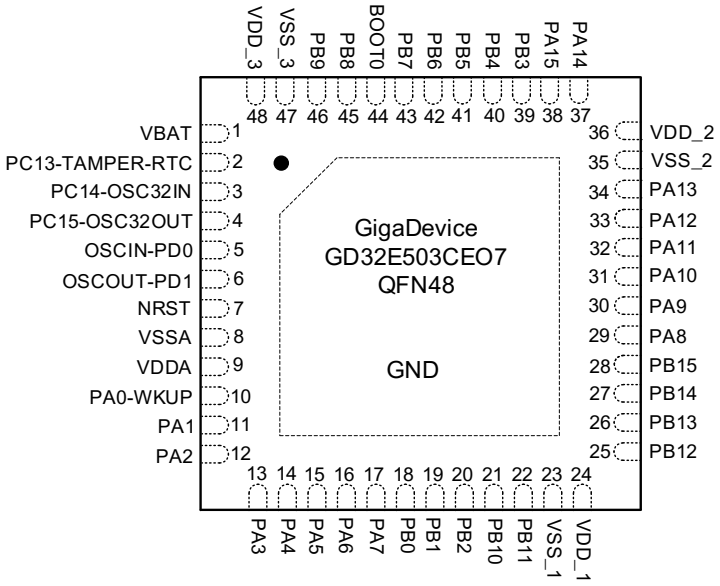

2.4. Memory map

Table 2-2. GD32E503xx memory map

Pre-defined Regions	Bus	Address	Peripherals
External device	AHB3	0xC000 0000 - 0xDFFF FFFF	Reserved
		0xB000 0000 - 0xBFFF FFFF	SQPI_PSRAM(MEM)
		0xA000 1400 - 0xAFFF FFFF	Reserved
		0xA000 1000 - 0xA000 13FF	SQPI_PSRAM(REG)
		0xA000 0000 - 0xA000 0FFF	EXMC - SWREG
External RAM		0x9000 0000 - 0x9FFF FFFF	EXMC - PC CARD
		0x7000 0000 - 0x8FFF FFFF	EXMC - NAND
		0x6000 0000 - 0x6FFF FFFF	EXMC - NOR/PSRAM/SRAM
Peripheral	AHB1	0x5000 0000 - 0x5003 FFFF	Reserved
		0x4008 0400 - 0x4FFF FFFF	Reserved
		0x4008 0000 - 0x4008 03FF	Reserved
		0x4004 0000 - 0x4007 FFFF	Reserved
		0x4002 BC00 - 0x4003 FFFF	Reserved
		0x4002 B000 - 0x4002 BBFF	Reserved
		0x4002 A000 - 0x4002 AFFF	Reserved
		0x4002 8000 - 0x4002 9FFF	Reserved
		0x4002 6800 - 0x4002 7FFF	Reserved
		0x4002 6400 - 0x4002 67FF	Reserved
		0x4002 6000 - 0x4002 63FF	Reserved
		0x4002 5000 - 0x4002 5FFF	Reserved
		0x4002 4000 - 0x4002 4FFF	Reserved
		0x4002 3C00 - 0x4002 3FFF	Reserved
		0x4002 3800 - 0x4002 3BFF	Reserved
		0x4002 3400 - 0x4002 37FF	Reserved
		0x4002 3000 - 0x4002 33FF	CRC
		0x4002 2C00 - 0x4002 2FFF	Reserved
		0x4002 2800 - 0x4002 2BFF	Reserved
		0x4002 2400 - 0x4002 27FF	Reserved
		0x4002 2000 - 0x4002 23FF	FMC
		0x4002 1C00 - 0x4002 1FFF	Reserved
		0x4002 1800 - 0x4002 1BFF	Reserved
		0x4002 1400 - 0x4002 17FF	Reserved
		0x4002 1000 - 0x4002 13FF	RCU
		0x4002 0C00 - 0x4002 0FFF	Reserved
		0x4002 0800 - 0x4002 0BFF	Reserved
		0x4002 0400 - 0x4002 07FF	DMA1


Pre-defined Regions	Bus	Address	Peripherals
		0x4002 0000 - 0x4002 03FF	DMA0
		0x4001 8400 - 0x4001 FFFF	Reserved
		0x4001 8000 - 0x4001 83FF	SDIO
	APB2	0x4001 7C00 - 0x4001 7FFF	CMP
		0x4001 7800 - 0x4001 7BFF	Reserved
		0x4001 7400 - 0x4001 77FF	SHRTIMER
		0x4001 7000 - 0x4001 73FF	USART5
		0x4001 6C00 - 0x4001 6FFF	Reserved
		0x4001 6800 - 0x4001 6BFF	Reserved
		0x4001 5C00 - 0x4001 67FF	Reserved
		0x4001 5800 - 0x4001 5BFF	Reserved
		0x4001 5400 - 0x4001 57FF	TIMER10
		0x4001 5000 - 0x4001 53FF	TIMER9
		0x4001 4C00 - 0x4001 4FFF	TIMER8
		0x4001 4800 - 0x4001 4BFF	Reserved
		0x4001 4400 - 0x4001 47FF	Reserved
		0x4001 4000 - 0x4001 43FF	Reserved
		0x4001 3C00 - 0x4001 3FFF	ADC2
		0x4001 3800 - 0x4001 3BFF	USART0
		0x4001 3400 - 0x4001 37FF	TIMER7
		0x4001 3000 - 0x4001 33FF	SPI0
		0x4001 2C00 - 0x4001 2FFF	TIMER0
		0x4001 2800 - 0x4001 2BFF	ADC1
		0x4001 2400 - 0x4001 27FF	ADC0
		0x4001 2000 - 0x4001 23FF	GPIOG
		0x4001 1C00 - 0x4001 1FFF	GPIOF
		0x4001 1800 - 0x4001 1BFF	GPIOE
		0x4001 1400 - 0x4001 17FF	GPIOD
		0x4001 1000 - 0x4001 13FF	GPIOC
		0x4001 0C00 - 0x4001 0FFF	GPIOB
		0x4001 0800 - 0x4001 0BFF	GPIOA
		0x4001 0400 - 0x4001 07FF	EXTI
		0x4001 0000 - 0x4001 03FF	AFIO
	APB1	0x4000 CC00 - 0x4000 FFFF	Reserved
		0x4000 CC00 - 0x4000 CFFF	Reserved
		0x4000 C800 - 0x4000 CBFF	CTC
		0x4000 C400 - 0x4000 C7FF	Reserved
		0x4000 C000 - 0x4000 C3FF	I2C2
		0x4000 8C00 - 0x4000 BFFF	Reserved
		0x4000 8800 - 0x4000 8BFF	Reserved
		0x4000 8400 - 0x4000 87FF	USBSRAM_B

Pre-defined Regions	Bus	Address	Peripherals
		0x4000 8000 - 0x4000 BFFF	Reserved
		0x4000 7C00 - 0x4000 7FFF	Reserved
		0x4000 7800 - 0x4000 7BFF	Reserved
		0x4000 7400 - 0x4000 77FF	DAC0
		0x4000 7000 - 0x4000 73FF	PMU
		0x4000 6C00 - 0x4000 6FFF	BKP
		0x4000 6800 - 0x4000 6BFF	CAN1
		0x4000 6400 - 0x4000 67FF	CAN0
		0x4000 6000 - 0x4000 63FF	Shared USBD/CAN SRAM 512 bytes
		0x4000 5C00 - 0x4000 5FFF	USBD
		0x4000 5800 - 0x4000 5BFF	I2C1
		0x4000 5400 - 0x4000 57FF	I2C0
		0x4000 5000 - 0x4000 53FF	UART4
		0x4000 4C00 - 0x4000 4FFF	UART3
		0x4000 4800 - 0x4000 4BFF	USART2
		0x4000 4400 - 0x4000 47FF	USART1
		0x4000 4000 - 0x4000 43FF	I2S2_add
		0x4000 3C00 - 0x4000 3FFF	SPI2/I2S2
		0x4000 3800 - 0x4000 3BFF	SPI1/I2S1
		0x4000 3400 - 0x4000 37FF	I2S1_add
		0x4000 3000 - 0x4000 33FF	FWDGT
		0x4000 2C00 - 0x4000 2FFF	WWDGT
		0x4000 2800 - 0x4000 2BFF	RTC
		0x4000 2400 - 0x4000 27FF	Reserved
		0x4000 2000 - 0x4000 23FF	TIMER13
		0x4000 1C00 - 0x4000 1FFF	TIMER12
		0x4000 1800 - 0x4000 1BFF	TIMER11
		0x4000 1400 - 0x4000 17FF	TIMER6
		0x4000 1000 - 0x4000 13FF	TIMER5
		0x4000 0C00 - 0x4000 0FFF	TIMER4
		0x4000 0800 - 0x4000 0BFF	TIMER3
		0x4000 0400 - 0x4000 07FF	TIMER2
		0x4000 0000 - 0x4000 03FF	TIMER1
SRAM	AHB	0x2007 0000 - 0x3FFF FFFF	Reserved
		0x2006 0000 - 0x2006 FFFF	Reserved
		0x2003 0000 - 0x2005 FFFF	Reserved
		0x2002 0000 - 0x2002 FFFF	Reserved
		0x2000 0000 - 0x2001 FFFF	SRAM
Code	AHB	0x1FFF F810 - 0x1FFF FFFF	Reserved
		0x1FFF F800 - 0x1FFF F80F	Option Bytes

Pre-defined Regions	Bus	Address	Peripherals
		0x1FFF E000 - 0x1FFF F7FF	Boot loader
		0x1FFF 7800 - 0x1FFF DFFF	Reserved
		0x1FFF 7000 - 0x1FFF 77FF	OTP
		0x1FFF 0000 - 0x1FFF 6FFF	Reserved
		0x1FFE C010 - 0x1FFE FFFF	Reserved
		0x1FFE C000 - 0x1FFE C00F	Reserved
		0x1001 0000 - 0x1FFE BFFF	Reserved
		0x1000 0000 - 0x1000 FFFF	Reserved
		0x083C 0000 - 0x0FFF FFFF	Reserved
		0x0830 0000 - 0x083B FFFF	Reserved
		0x0808 0000 - 0x082F FFFF	Reserved
		0x0800 0000 - 0x0807 FFFF	Main Flash
		0x0030 0000 - 0x07FF FFFF	Reserved
		0x0010 0000 - 0x002F FFFF	Reserved
		0x0008 0000 - 0x000F FFFF	Reserved
		0x0002 0000 - 0x0007 FFFF	Aliased to Main Flash or Boot loader
		0x0000 0000 - 0x0001 FFFF	

2.5. Clock tree

Figure 2-7. GD32E503xx clock tree

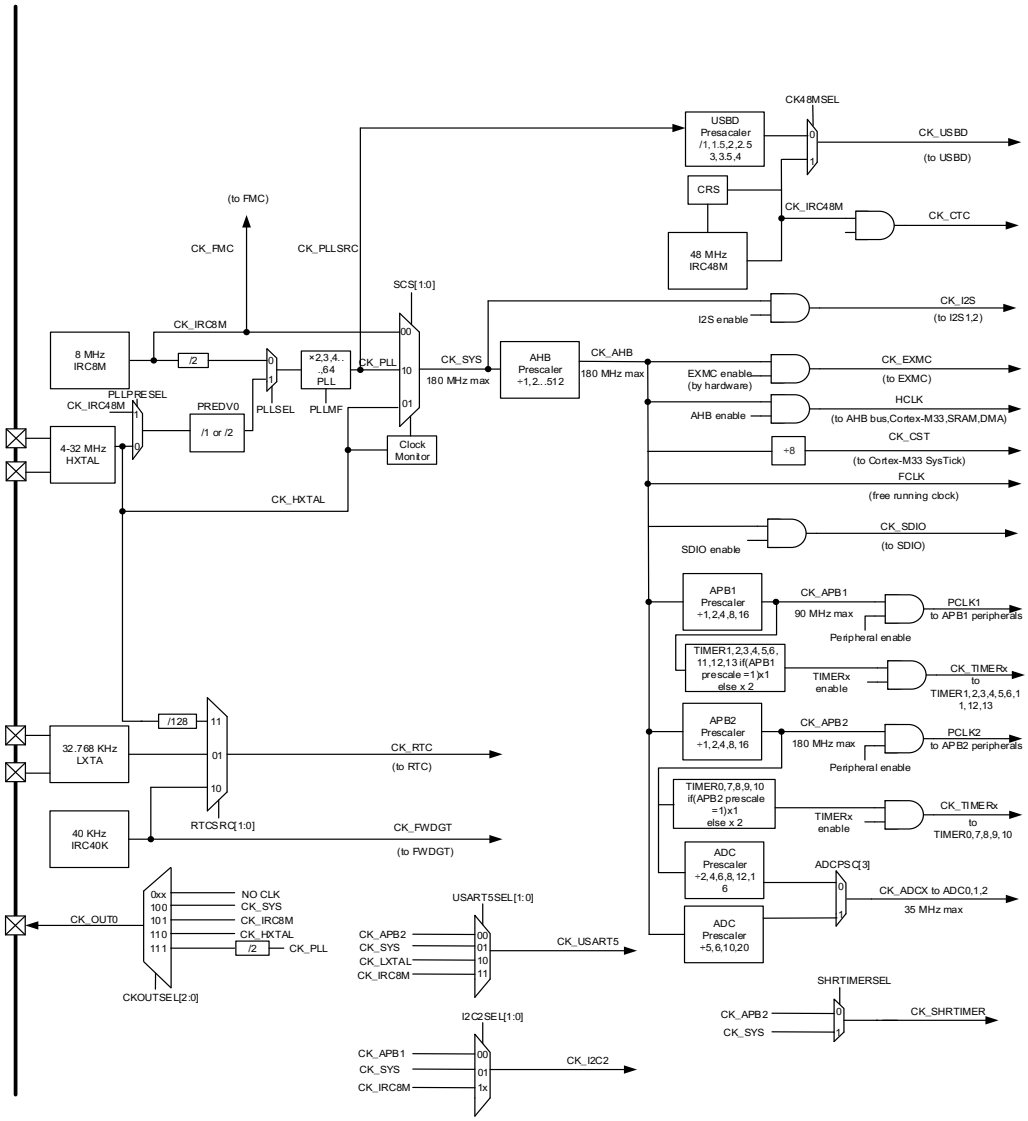

Note:

The TIMERs are clocked by the clock divided from CK_APB2 and CK_APB1. The frequency of TIMERs clock is equal to CK_APBx(APB prescaler is 1), twice the CK_APBx(APB prescaler is not 1).

Legend:

HXTAL: High speed crystal oscillator

LXTAL: Low speed crystal oscillator

IRC8M: Internal 8M RC oscillator

IRC40K: Internal 40K RC oscillator

IRC48M: Internal 48M RC oscillator

2.6. Pin definitions

2.6.1. GD32E503Zx LQFP144 pin definitions

Table 2-3. GD32E503Zx LQFP144 pin definitions

GD32E503Zx LQFP144				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PE2	1	I/O	5VT	Default: PE2 Alternate2: EXMC_A23
PE3	2	I/O	5VT	Default: PE3 Alternate2: EXMC_A19
PE4	3	I/O	5VT	Default: PE4 Alternate2: EXMC_A20
PE5	4	I/O	5VT	Default: PE5 Alternate2: EXMC_A21 Remap: TIMER8_CH0(4)
PE6	5	I/O	5VT	Default: PE6 Alternate2: EXMC_A22, WKUP2 Remap: TIMER8_CH1(4)
VBAT	6	P		Default: VBAT
PC13-TAMPER-RTC	7	I/O		Default: PC13 Alternate2: TAMPER-RTC, WKUP1
PC14-OSC32IN	8	I/O		Default: PC14 Alternate2: OSC32IN
PC15-OSC32OUT	9	I/O		Default: PC15 Alternate2: OSC32OUT
PF0	10	I/O	5VT	Default: PF0 Alternate2: EXMC_A0, SQPI_D0 Remap: CTC_SYNC
PF1	11	I/O	5VT	Default: PF1 Alternate2: EXMC_A1
PF2	12	I/O	5VT	Default: PF2 Alternate2: EXMC_A2, SQPI_D2
PF3	13	I/O	5VT	Default: PF3 Alternate2: EXMC_A3
PF4	14	I/O	5VT	Default: PF4 Alternate2: EXMC_A4, SQPI_D1
PF5	15	I/O	5VT	Default: PF5 Alternate2: EXMC_A5
VSS_5	16	P		Default: VSS_5
VDD_5	17	P		Default: VDD_5
PF6	18	I/O		Default: PF6 Alternate2: ADC2_IN4, EXMC_NIORD, SQPI_CSN Remap: TIMER9_CH0(4)

GD32E503Zx LQFP144				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PF7	19	I/O		Default: PF7 Alternate2: ADC2_IN5, EXMC_NREG Remap: TIMER10_CH0(4)
PF8	20	I/O		Default: PF8 Alternate2: ADC2_IN6, EXMC_NIOWR, WKUP7, SQPI_CLK Remap: TIMER12_CH0(4)
PF9	21	I/O		Default: PF9 Alternate2: ADC2_IN7, EXMC_CD Remap: TIMER13_CH0(4)
PF10	22	I/O		Default: PF10 Alternate2: ADC2_IN8, EXMC_INTR, SQPI_D3
OSCIN-PD0	23	I		Default: OSCIN Remap: PD0
OSCOUT-PD1	24	O		Default: OSCOUT Remap: PD1
NRST	25	I/O		Default: NRST
PC0	26	I/O		Default: PC0 Alternate2: ADC012_IN10
PC1	27	I/O		Default: PC1 Alternate2: ADC012_IN11
PC2	28	I/O		Default: PC2 Alternate1: I2S1_ADD_SD Alternate2: ADC012_IN12
PC3	29	I/O		Default: PC3 Alternate2: ADC012_IN13
VSSA	30	P		Default: VSSA
VREFN	31	P		Default: VREFN
VREFP	32	P		Default: VREFP
VDDA	33	P		Default: VDDA
PA0-WKUP	34	I/O		Default: PA0 Alternate2: WKUP0, USART1_CTS, ADC012_IN0, TIMER1_CH0, TIMER1_ETI, TIMER4_CH0, TIMER7_ETI
PA1	35	I/O		Default: PA1 Alternate2: USART1_RTS, ADC012_IN1, TIMER4_CH1, TIMER1_CH1
PA2	36	I/O		Default: PA2 Alternate2: USART1_TX, TIMER4_CH2, ADC012_IN2, TIMER8_CH0(4), TIMER1_CH2, SPI0_IO2, WKUP3
PA3	37	I/O		Default: PA3 Alternate2: USART1_RX, TIMER4_CH3, ADC012_IN3, TIMER1_CH3, TIMER8_CH1(4), SPI0_IO3
VSS_4	38	P		Default: VSS_4
VDD_4	39	P		Default: VDD_4

GD32E503Zx LQFP144				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PA4	40	I/O		Default: PA4 Alternate2: SPI0_NSS, USART1_CK, DAC0_OUT0, ADC01_IN4 Remap: SPI2_NSS, I2S2_WS
PA5	41	I/O		Default: PA5 Alternate2: SPI0_SCK, ADC01_IN5, DAC0_OUT1
PA6	42	I/O		Default: PA6 Alternate2: SPI0_MISO, TIMER7_BRKIN, ADC01_IN6, TIMER2_CH0, TIMER12_CH0(4) Remap: TIMER0_BRKIN
PA7	43	I/O		Default: PA7 Alternate2: SPI0_MOSI, TIMER7_CH0_ON, ADC01_IN7, TIMER2_CH1, TIMER13_CH0(4) Remap: TIMER0_CH0_ON
PC4	44	I/O		Default: PC4 Alternate2: ADC01_IN14
PC5	45	I/O		Default: PC5 Alternate2: ADC01_IN15, WKUP4
PB0	46	I/O		Default: PB0 Alternate2: ADC01_IN8, TIMER2_CH2, TIMER7_CH1_ON Remap: TIMER0_CH1_ON
PB1	47	I/O		Default: PB1 Alternate1: SHRTIMER_SCOUT Alternate2: ADC01_IN9, TIMER2_CH3, TIMER7_CH2_ON Remap: TIMER0_CH2_ON
PB2	48	I/O	5VT	Default: PB2, BOOT1 Alternate1: SHRTIMER_SCIN
PF11	49	I/O	5VT	Default: PF11 Alternate2: EXMC_NIOS16
PF12	50	I/O	5VT	Default: PF12 Alternate2: EXMC_A6
VSS_6	51	P		Default: VSS_6
VDD_6	52	P		Default: VDD_6
PF13	53	I/O	5VT	Default: PF13 Alternate2: EXMC_A7
PF14	54	I/O	5VT	Default: PF14 Alternate2: EXMC_A8
PF15	55	I/O	5VT	Default: PF15 Alternate2: EXMC_A9
PG0	56	I/O	5VT	Default: PG0 Alternate2: EXMC_A10
PG1	57	I/O	5VT	Default: PG1 Alternate2: EXMC_A11

GD32E503Zx LQFP144				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PE7	58	I/O	5VT	Default: PE7 Alternate2: EXMC_D4 Remap: TIMER0_ETI
PE8	59	I/O	5VT	Default: PE8 Alternate2: EXMC_D5 Remap: TIMER0_CH0_ON
PE9	60	I/O	5VT	Default: PE9 Alternate2: EXMC_D6 Remap: TIMER0_CH0
VSS_7	61	P		Default: VSS_7
VDD_7	62	P		Default: VDD_7
PE10	63	I/O	5VT	Default: PE10 Alternate2: EXMC_D7 Remap: TIMER0_CH1_ON
PE11	64	I/O	5VT	Default: PE11 Alternate2: EXMC_D8 Remap: TIMER0_CH1
PE12	65	I/O	5VT	Default: PE12 Alternate2: EXMC_D9 Remap: TIMER0_CH2_ON
PE13	66	I/O	5VT	Default: PE13 Alternate2: EXMC_D10 Remap: TIMER0_CH2
PE14	67	I/O	5VT	Default: PE14 Alternate2: EXMC_D11 Remap: TIMER0_CH3
PE15	68	I/O	5VT	Default: PE15 Alternate2: EXMC_D12 Remap: TIMER0_BRKIN
PB10	69	I/O	5VT	Default: PB10 Alternate1: SHRTIMER_FLT2 Alternate2: I2C1_SCL, USART2_TX Remap: TIMER1_CH2
PB11	70	I/O	5VT	Default: PB11 Alternate1: SHRTIMER_FLT3 Alternate2: I2C1_SDA, USART2_RX Remap: TIMER1_CH3
VSS_1	71	P		Default: VSS_1
VDD_1	72	P		Default: VDD_1
PB12	73	I/O	5VT	Default: PB12 Alternate1: SHRTIMER_ST2CH0 Alternate2: SPI1_NSS, I2S1_WS, I2C1_SMBA, USART2_CK, TIMER0_BRKIN, CAN1_RX
PB13	74	I/O	5VT	Default: PB13 Alternate1: SHRTIMER_ST2CH1

GD32E503Zx LQFP144				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
				Alternate2: SPI1_SCK, I2S1_CK, USART2_CTS, TIMER0_CH0_ON, CAN1_TX, I2C1_TXFRAME
PB14	75	I/O	5VT	Default: PB14 Alternate1: SHRTIMER_ST3CH0, I2S1_ADD_SD Alternate2: SPI1_MISO, USART2_RTS, TIMER0_CH1_ON, TIMER11_CH0(4)
PB15	76	I/O	5VT	Default: PB15 Alternate1: SHRTIMER_ST3CH1 Alternate2: SPI1_MOSI, TIMER0_CH2_ON, I2S1_SD, TIMER11_CH1(4), WKUP6
PD8	77	I/O	5VT	Default: PD8 Alternate2: EXMC_D13 Remap: USART2_TX
PD9	78	I/O	5VT	Default: PD9 Alternate2: EXMC_D14 Remap: USART2_RX
PD10	79	I/O	5VT	Default: PD10 Alternate2: EXMC_D15 Remap: USART2_CK
PD11	80	I/O	5VT	Default: PD11 Alternate2: EXMC_A16/EXMC_CLE Remap: USART2_CTS
PD12	81	I/O	5VT	Default: PD12 Alternate2: EXMC_A17/EXMC_ALE Remap: TIMER3_CH0, USART2_RTS
PD13	82	I/O	5VT	Default: PD13 Alternate2: EXMC_A18 Remap: TIMER3_CH1
VSS_8	83	P		Default: VSS_8
VDD_8	84	P		Default: VDD_8
PD14	85	I/O	5VT	Default: PD14 Alternate2: EXMC_D0 Remap: TIMER3_CH2
PD15	86	I/O	5VT	Default: PD15 Alternate2: EXMC_D1 Remap: TIMER3_CH3, CTC_SYNC
PG2	87	I/O	5VT	Default: PG2 Alternate2: EXMC_A12
PG3	88	I/O	5VT	Default: PG3 Alternate2: EXMC_A13
PG4	89	I/O	5VT	Default: PG4 Alternate2: EXMC_A14, SQPI_CSN
PG5	90	I/O	5VT	Default: PG5 Alternate2: EXMC_A15
PG6	91	I/O	5VT	Default: PG6

GD32E503Zx LQFP144				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
				Alternate1: SHRTIMER_ST4CH0 Alternate2: EXMC_INT1, SQPI_D1
PG7	92	I/O	5VT	Default: PG7 Alternate1: SHRTIMER_ST4CH1, USART5_CK Alternate2: EXMC_INT2
PG8	93	I/O	5VT	Default: PG8 Alternate2: SQPI_D2
VSS_9	94	P		Default: VSS_9
VDD_9	95	P		Default: VDD_9
PC6	96	I/O	5VT	Default: PC6 Alternate1: SHRTIMER_EXEV9, USART5_TX Alternate2: I2S1_MCK, TIMER7_CH0, SDIO_D6 Remap: TIMER2_CH0
PC7	97	I/O	5VT	Default: PC7 Alternate1: SHRTIMER_FLT4, USART5_RX Alternate2: I2S2_MCK, TIMER7_CH1, SDIO_D7 Remap: TIMER2_CH1
PC8	98	I/O	5VT	Default: PC8 Alternate1: SHRTIMER_ST4CH0, USART5_CK Alternate2: TIMER7_CH2, SDIO_D0 Remap: TIMER2_CH2
PC9	99	I/O	5VT	Default: PC9 Alternate1: SHRTIMER_ST4CH1, I2C2_SDA Alternate2: TIMER7_CH3, SDIO_D1 Remap: TIMER2_CH3
PA8	100	I/O	5VT	Default: PA8 Alternate1: SHRTIMER_ST0CH0, I2C2_SCL Alternate2: USART0_CK, TIMER0_CH0, CK_OUT, CTC_SYNC
PA9	101	I/O	5VT	Default: PA9 Alternate1: SHRTIMER_ST0CH1, I2C2_SMBA Alternate2: USART0_TX, TIMER0_CH1
PA10	102	I/O	5VT	Default: PA10 Alternate1: SHRTIMER_ST1CH0 Alternate2: USART0_RX, TIMER0_CH2
PA11	103	I/O		Default: PA11 Alternate1: SHRTIMER_ST1CH1, USART5_TX Alternate2: USART0_CTS, CAN0_RX,USBDM, TIMER0_CH3
PA12	104	I/O		Default: PA12 Alternate1: SHRTIMER_FLT0, USART5_RX Alternate2: USART0_RTS, CAN0_TX, USBDP, TIMER0_ETI
PA13	105	I/O	5VT	Default: JTMS, SWDIO Remap: PA13

GD32E503Zx LQFP144				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
NC	106			-
VSS_2	107	P		Default: VSS_2
VDD_2	108	P		Default: VDD_2
PA14	109	I/O	5VT	Default: JTCK, SWCLK Remap: PA14
PA15	110	I/O	5VT	Default: JTDI Alternate1: SHRTIMER_FLT1 Alternate2: SPI2_NSS, I2S2_WS Remap: TIMER1_CH0, TIMER1_ETI, PA15, SPI0_NSS
PC10	111	I/O	5VT	Default: PC10 Alternate1: I2C2_SCL Alternate2: UART3_TX, SDIO_D2 Remap: USART2_TX, SPI2_SCK, I2S2_CK
PC11	112	I/O	5VT	Default: PC11 Alternate1: SHRTIMER_EXEV1, I2S2_ADD_SD Alternate2: UART3_RX, SDIO_D3 Remap: USART2_RX, SPI2_MISO
PC12	113	I/O	5VT	Default: PC12 Alternate1: SHRTIMER_EXEV0 Alternate2: UART4_TX, SDIO_CK Remap: USART2_CK, SPI2_MOSI, I2S2_SD
PD0	114	I/O	5VT	Default: PD0 Alternate2: EXMC_D2 Remap: CAN0_RX
PD1	115	I/O	5VT	Default: PD1 Alternate2: EXMC_D3 Remap: CAN0_TX
PD2	116	I/O	5VT	Default: PD2 Alternate2: TIMER2_ETI, UART4_RX, SDIO_CMD
PD3	117	I/O	5VT	Default: PD3 Alternate2: EXMC_CLK Remap: USART1_CTS
PD4	118	I/O	5VT	Default: PD4 Alternate1: SHRTIMER_FLT2 Alternate2: EXMC_NOE Remap: USART1_RTS
PD5	119	I/O	5VT	Default: PD5 Alternate1: SHRTIMER_EXEV2 Alternate2: EXMC_NWE Remap: USART1_TX
VSS_10	120			Default: VSS_10
VDD_10	121			Default: VDD_10
PD6	122	I/O	5VT	Default: PD6 Alternate2: EXMC_NWAIT Remap: USART1_RX

GD32E503Zx LQFP144				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PD7	123	I/O	5VT	Default: PD7 Alternate2: EXMC_NE0, EXMC_NCE1 Remap: USART1_CK
PG9	124	I/O	5VT	Default: PG9 Alternate1: USART5_RX Alternate2: EXMC_NE1, EXMC_NCE2
PG10	125	I/O	5VT	Default: PG10 Alternate1: SHRTIMER_FLT4 Alternate2: EXMC_NCE3_0, EXMC_NE2
PG11	126	I/O	5VT	Default: PG11 Alternate1: SHRTIMER_EXEV3 Alternate2: EXMC_NCE3_1
PG12	127	I/O	5VT	Default: PG12 Alternate1: SHRTIMER_EXEV4 Alternate2: EXMC_NE3
PG13	128	I/O	5VT	Default: PG13 Alternate1: SHRTIMER_EXEV9 Alternate2: EXMC_A24
PG14	129	I/O	5VT	Default: PG14 Alternate1: USART5_TX Alternate2: EXMC_A25
VSS_11	130	P		Default: VSS_11
VDD_11	131	P		Default: VDD_11
PG15	132	I/O	5VT	Default: PG15
PB3	133	I/O	5VT	Default: JTDO Alternate1: SHRTIMER_SCOUT, SHRTIMER_EXEV8 Alternate2: SPI2_SCK, I2S2_CK Remap: TIMER1_CH1, PB3, SPI0_SCK, TRACESWO
PB4	134	I/O	5VT	Default: NJTRST Alternate1: SHRTIMER_EXEV6, I2C2_SDA, I2S2_ADD_SD Alternate2: SPI2_MISO, I2C0_TXFRAME Remap: TIMER2_CH0, PB4, SPI0_MISO
PB5	135	I/O		Default: PB5 Alternate1: SHRTIMER_EXEV5, I2C2_SCL Alternate2: I2C0_SMBA, SPI2_MOSI, I2S2_SD, WKUP5 Remap: TIMER2_CH1, SPI0_MOSI, CAN1_RX
PB6	136	I/O	5VT	Default: PB6 Alternate1: SHRTIMER_SCIN, SHRTIMER_EXEV3 Alternate2: I2C0_SCL, TIMER3_CH0 Remap: USART0_TX, CAN1_TX, SPI0_IO2
PB7	137	I/O	5VT	Default: PB7 Alternate1: SHRTIMER_EXEV2 Alternate2: I2C0_SDA , TIMER3_CH1, EXMC_NADV

GD32E503Zx LQFP144				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
				Remap: USART0_RX, SPI0_IO3
BOOT0	138	I		Default: BOOT0
PB8	139	I/O	5VT	Default: PB8 Alternate1: SHRTIMER_EXEV7, I2C2_SDA Alternate2: TIMER3_CH2, SDIO_D4, TIMER9_CH0(4) Remap: I2C0_SCL, CAN0_RX
PB9	140	I/O	5VT	Default: PB9 Alternate1: SHRTIMER_EXEV4 Alternate2: TIMER3_CH3, SDIO_D5, TIMER10_CH0(4) Remap: I2C0_SDA, CAN0_TX
PE0	141	I/O	5VT	Default: PE0 Alternate1: SHRTIMER_SCIN Alternate2: TIMER3_ETI, EXMC_NBL0
PE1	142	I/O	5VT	Default: PE1 Alternate1: SHRTIMER_SCOUT Alternate2: EXMC_NBL1
VSS_3	143	P		Default: VSS_3
VDD_3	144	P		Default: VDD_3

Notes:

(1) Type: I = input, O = output, P = power.

(2) I/O Level: 5VT = 5 V tolerant.

(3) Alternate1: The specified function can be mapped to the specific pin by configuring AFIO_PCFA ~ AFIO_PCFG registers.

Alternate2: These functions can be enabled with correct GPIO and function module mode configurations.

Remap: A group of the specified module functions can be mapped to the specified pins by configuring AFIO_PCF0 ~ AFIO_PCF1 registers.

(4) Functions are available in GD32E503xE devices.

2.6.2. GD32E503Vx LQFP100 pin definitions

Table 2-4. GD32E503Vx LQFP100 pin definitions

GD32E503Vx LQFP100				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PE2	1	I/O	5VT	Default: PE2 Alternate2: EXMC_A23
PE3	2	I/O	5VT	Default: PE3 Alternate2: EXMC_A19
PE4	3	I/O	5VT	Default: PE4 Alternate2: EXMC_A20
PE5	4	I/O	5VT	Default: PE5 Alternate2: EXMC_A21 Remap: TIMER8_CH0(4)
PE6	5	I/O	5VT	Default: PE6 Alternate2: EXMC_A22, WKUP2 Remap: TIMER8_CH1(4)
VBAT	6	P		Default: VBAT
PC13-TAMPER-RTC	7	I/O		Default: PC13 Alternate2: TAMPER-RTC, WKUP1
PC14-OSC32IN	8	I/O		Default: PC14 Alternate2: OSC32IN
PC15-OSC32OUT	9	I/O		Default: PC15 Alternate2: OSC32OUT
VSS_5	10	P		Default: VSS_5
VDD_5	11	P		Default: VDD_5
OSCIN-PD0	12	I		Default: OSCIN Remap: PD0
OSCOUT-PD1	13	O		Default: OSCOUT Remap: PD1
NRST	14	I/O		Default: NRST
PC0	15	I/O		Default: PC0 Alternate2: ADC012_IN10
PC1	16	I/O		Default: PC1 Alternate2: ADC012_IN11
PC2	17	I/O		Default: PC2 Alternate1: I2S1_ADD_SD Alternate2: ADC012_IN12
PC3	18	I/O		Default: PC3 Alternate2: ADC012_IN13
VSSA	19	P		Default: VSSA
VREFN	20	P		Default: VREFN
VREFP	21	P		Default: VREFP
VDDA	22	P		Default: VDDA

GD32E503Vx LQFP100				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PA0-WKUP	23	I/O		Default: PA0 Alternate2: WKUP0, USART1_CTS, ADC012_IN0, TIMER1_CH0, TIMER1_ETI, TIMER4_CH0, TIMER7_ETI
PA1	24	I/O		Default: PA1 Alternate2: USART1_RTS, ADC012_IN1, TIMER4_CH1, TIMER1_CH1
PA2	25	I/O		Default: PA2 Alternate2: USART1_TX, TIMER4_CH2, ADC012_IN2, TIMER8_CH0(4), TIMER1_CH2, SPI0_IO2, WKUP3
PA3	26	I/O		Default: PA3 Alternate2: USART1_RX, TIMER4_CH3, ADC012_IN3, TIMER1_CH3, TIMER8_CH1(4), SPI0_IO3
VSS_4	27	P		Default: VSS_4
VDD_4	28	P		Default: VDD_4
PA4	29	I/O		Default: PA4 Alternate2: SPI0_NSS, USART1_CK, DAC0_OUT0, ADC01_IN4 Remap: SPI2_NSS, I2S2_WS
PA5	30	I/O		Default: PA5 Alternate2: SPI0_SCK, ADC01_IN5, DAC0_OUT1
PA6	31	I/O		Default: PA6 Alternate2: SPI0_MISO, TIMER7_BRKIN, ADC01_IN6, TIMER2_CH0, TIMER12_CH0(4) Remap: TIMER0_BRKIN
PA7	32	I/O		Default: PA7 Alternate2: SPI0_MOSI, TIMER7_CH0_ON, ADC01_IN7, TIMER2_CH1, TIMER13_CH0(4) Remap: TIMER0_CH0_ON
PC4	33	I/O		Default: PC4 Alternate2: ADC01_IN14
PC5	34	I/O		Default: PC5 Alternate2: ADC01_IN15, WKUP4
PB0	35	I/O		Default: PB0 Alternate2: ADC01_IN8, TIMER2_CH2, TIMER7_CH1_ON Remap: TIMER0_CH1_ON
PB1	36	I/O		Default: PB1 Alternate1: SHRTIMER_SCOUT Alternate2: ADC01_IN9, TIMER2_CH3, TIMER7_CH2_ON Remap: TIMER0_CH2_ON
PB2	37	I/O	5VT	Default: PB2, BOOT1

GD32E503Vx LQFP100				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
				Alternate1: SHRTIMER_SCIN
PE7	38	I/O	5VT	Default: PE7 Alternate2: EXMC_D4 Remap: TIMER0_ETI
PE8	39	I/O	5VT	Default: PE8 Alternate2: EXMC_D5 Remap: TIMER0_CH0_ON
PE9	40	I/O	5VT	Default: PE9 Alternate2: EXMC_D6 Remap: TIMER0_CH0
PE10	41	I/O	5VT	Default: PE10 Alternate2: EXMC_D7 Remap: TIMER0_CH1_ON
PE11	42	I/O	5VT	Default: PE11 Alternate2: EXMC_D8 Remap: TIMER0_CH1
PE12	43	I/O	5VT	Default: PE12 Alternate2: EXMC_D9 Remap: TIMER0_CH2_ON
PE13	44	I/O	5VT	Default: PE13 Alternate2: EXMC_D10 Remap: TIMER0_CH2
PE14	45	I/O	5VT	Default: PE14 Alternate2: EXMC_D11 Remap: TIMER0_CH3
PE15	46	I/O	5VT	Default: PE15 Alternate2: EXMC_D12 Remap: TIMER0_BRKIN
PB10	47	I/O	5VT	Default: PB10 Alternate1: SHRTIMER_FLT2 Alternate2: I2C1_SCL, USART2_TX Remap: TIMER1_CH2
PB11	48	I/O	5VT	Default: PB11 Alternate1: SHRTIMER_FLT3 Alternate2: I2C1_SDA, USART2_RX Remap: TIMER1_CH3
VSS_1	49	P		Default: VSS_1
VDD_1	50	P		Default: VDD_1
PB12	51	I/O	5VT	Default: PB12 Alternate1: SHRTIMER_ST2CH0 Alternate2: SPI1_NSS, I2S1_WS, I2C1_SMBA, USART2_CK, TIMER0_BRKIN, CAN1_RX
PB13	52	I/O	5VT	Default: PB13 Alternate1: SHRTIMER_ST2CH1 Alternate2: SPI1_SCK, I2S1_CK, USART2_CTS,

GD32E503Vx LQFP100				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
				TIMER0_CH0_ON, CAN1_TX, I2C1_TXFRAME
PB14	53	I/O	5VT	Default: PB14 Alternate1: SHRTIMER_ST3CH0, I2S1_ADD_SD Alternate2: SPI1_MISO, USART2_RTS, TIMER0_CH1_ON, TIMER11_CH0(4)
PB15	54	I/O	5VT	Default: PB15 Alternate1: SHRTIMER_ST3CH1 Alternate2: SPI1_MOSI, TIMER0_CH2_ON, I2S1_SD, TIMER11_CH1(4), WKUP6
PD8	55	I/O	5VT	Default: PD8 Alternate2: EXMC_D13 Remap: USART2_TX
PD9	56	I/O	5VT	Default: PD9 Alternate2: EXMC_D14 Remap: USART2_RX
PD10	57	I/O	5VT	Default: PD10 Alternate2: EXMC_D15 Remap: USART2_CK
PD11	58	I/O	5VT	Default: PD11 Alternate2: EXMC_A16/EXMC_CLE Remap: USART2_CTS
PD12	59	I/O	5VT	Default: PD12 Alternate2: EXMC_A17/EXMC_ALE Remap: TIMER3_CH0, USART2_RTS
PD13	60	I/O	5VT	Default: PD13 Alternate2: EXMC_A18 Remap: TIMER3_CH1
PD14	61	I/O	5VT	Default: PD14 Alternate2: EXMC_D0 Remap: TIMER3_CH2
PD15	62	I/O	5VT	Default: PD15 Alternate2: EXMC_D1 Remap: TIMER3_CH3, CTC_SYNC
PC6	63	I/O	5VT	Default: PC6 Alternate1: SHRTIMER_EXEV9, USART5_TX Alternate2: I2S1_MCK, TIMER7_CH0, SDIO_D6 Remap: TIMER2_CH0
PC7	64	I/O	5VT	Default: PC7 Alternate1: SHRTIMER_FLT4, USART5_RX Alternate2: I2S2_MCK, TIMER7_CH1, SDIO_D7 Remap: TIMER2_CH1
PC8	65	I/O	5VT	Default: PC8 Alternate1: SHRTIMER_ST4CH0, USART5_CK Alternate2: TIMER7_CH2, SDIO_D0 Remap: TIMER2_CH2

GD32E503Vx LQFP100				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PC9	66	I/O	5VT	Default: PC9 Alternate1: SHRTIMER_ST4CH1, I2C2_SDA Alternate2: TIMER7_CH3, SDIO_D1 Remap: TIMER2_CH3
PA8	67	I/O	5VT	Default: PA8 Alternate1: SHRTIMER_ST0CH0, I2C2_SCL Alternate2: USART0_CK, TIMER0_CH0, CK_OUT, CTC_SYNC
PA9	68	I/O	5VT	Default: PA9 Alternate1: SHRTIMER_ST0CH1, I2C2_SMBA Alternate2: USART0_TX, TIMER0_CH1
PA10	69	I/O	5VT	Default: PA10 Alternate1: SHRTIMER_ST1CH0 Alternate2: USART0_RX, TIMER0_CH2
PA11	70	I/O		Default: PA11 Alternate1: SHRTIMER_ST1CH1, USART5_TX Alternate2: USART0_CTS, CAN0_RX, USBDM, TIMER0_CH3
PA12	71	I/O		Default: PA12 Alternate1: SHRTIMER_FLT0, USART5_RX Alternate2: USART0_RTS, CAN0_TX, USBDP, TIMER0_ETI
PA13	72	I/O	5VT	Default: JTMS, SWDIO Remap: PA13
NC	73			-
VSS_2	74	P		Default: VSS_2
VDD_2	75	P		Default: VDD_2
PA14	76	I/O	5VT	Default: JTCK, SWCLK Remap: PA14
PA15	77	I/O	5VT	Default: JTDI Alternate1: SHRTIMER_FLT1 Alternate2: SPI2_NSS, I2S2_WS Remap: TIMER1_CH0, TIMER1_ETI, PA15, SPI0_NSS
PC10	78	I/O	5VT	Default: PC10 Alternate1: I2C2_SCL Alternate2: UART3_TX, SDIO_D2 Remap: USART2_TX, SPI2_SCK, I2S2_CK
PC11	79	I/O	5VT	Default: PC11 Alternate1: SHRTIMER_EXEV1, I2S2_ADD_SD Alternate2: UART3_RX, SDIO_D3 Remap: USART2_RX, SPI2_MISO
PC12	80	I/O	5VT	Default: PC12 Alternate1: SHRTIMER_EXEV0 Alternate2: UART4_TX, SDIO_CK

GD32E503Vx LQFP100				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
				Remap: USART2_CK, SPI2_MOSI, I2S2_SD
PD0	81	I/O	5VT	Default: PD0 Alternate2: EXMC_D2 Remap: CAN0_RX
PD1	82	I/O	5VT	Default: PD1 Alternate2: EXMC_D3 Remap: CAN0_TX
PD2	83	I/O	5VT	Default: PD2 Alternate2: TIMER2_ETI, UART4_RX, SDIO_CMD
PD3	84	I/O	5VT	Default: PD3 Alternate2: EXMC_CLK Remap: USART1_CTS
PD4	85	I/O	5VT	Default: PD4 Alternate1: SHRTIMER_FLT2 Alternate2: EXMC_NOE Remap: USART1_RTS
PD5	86	I/O	5VT	Default: PD5 Alternate1: SHRTIMER_EXEV2 Alternate2: EXMC_NWE Remap: USART1_TX
PD6	87	I/O	5VT	Default: PD6 Alternate2: EXMC_NWAIT Remap: USART1_RX
PD7	88	I/O	5VT	Default: PD7 Alternate2: EXMC_NE0, EXMC_NCE1 Remap: USART1_CK
PB3	89	I/O	5VT	Default: JTDO Alternate1: SHRTIMER_SCOUT, SHRTIMER_EXEV8 Alternate2: SPI2_SCK, I2S2_CK Remap: TIMER1_CH1, PB3, SPI0_SCK, TRACESWO
PB4	90	I/O	5VT	Default: NJTRST Alternate1: SHRTIMER_EXEV6, I2C2_SDA, I2S2_ADD_SD Alternate2: SPI2_MISO, I2C0_TXFRAME Remap: TIMER2_CH0, PB4, SPI0_MISO
PB5	91	I/O		Default: PB5 Alternate1: SHRTIMER_EXEV5, I2C2_SCL Alternate2: I2C0_SMBA, SPI2_MOSI, I2S2_SD, WKUP5 Remap: TIMER2_CH1, SPI0_MOSI, CAN1_RX
PB6	92	I/O	5VT	Default: PB6 Alternate1: SHRTIMER_SCIN, SHRTIMER_EXEV3 Alternate2: I2C0_SCL, TIMER3_CH0

GD32E503Vx LQFP100				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
				Remap: USART0_TX, CAN1_TX, SPI0_IO2
PB7	93	I/O	5VT	Default: PB7 Alternate1: SHRTIMER_EXEV2 Alternate2: I2C0_SDA , TIMER3_CH1, EXMC_NADV Remap: USART0_RX, SPI0_IO3
BOOT0	94	I		Default: BOOT0
PB8	95	I/O	5VT	Default: PB8 Alternate1: SHRTIMER_EXEV7, I2C2_SDA Alternate2: TIMER3_CH2, SDIO_D4, TIMER9_CH0(4) Remap: I2C0_SCL, CAN0_RX
PB9	96	I/O	5VT	Default: PB9 Alternate1: SHRTIMER_EXEV4 Alternate2: TIMER3_CH3, SDIO_D5, TIMER10_CH0(4) Remap: I2C0_SDA, CAN0_TX
PE0	97	I/O	5VT	Default: PE0 Alternate1: SHRTIMER_SCIN Alternate2: TIMER3_ETI, EXMC_NBL0
PE1	98	I/O	5VT	Default: PE1 Alternate1: SHRTIMER_SCOUT Alternate2: EXMC_NBL1
VSS_3	99	P		Default: VSS_3
VDD_3	100	P		Default: VDD_3

Notes:

(1) Type: I = input, O = output, P = power.

(2) I/O Level: 5VT = 5 V tolerant.

(3) Alternate1: The specified function can be mapped to the specific pin by configuring AFIO_PCFA ~ AFIO_PCFG registers.

Alternate2: These functions can be enabled with correct GPIO and function module mode configurations.

Remap: A group of the specified module functions can be mapped to the specified pins by configuring AFIO_PCF0 ~ AFIO_PCF1 registers.

(4) Functions are available in GD32E503xE devices.

2.6.3. GD32E503Rx LQFP64 pin definitions

Table 2-5. GD32E503Rx LQFP64 pin definitions

GD32E503Rx LQFP64				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
VBAT	1	P		Default: VBAT
PC13-TAMPER-RTC	2	I/O		Default: PC13 Alternate2: TAMPER-RTC, WKUP1
PC14-OSC32IN	3	I/O		Default: PC14 Alternate2: OSC32IN
PC15-OSC32OUT	4	I/O		Default: PC15 Alternate2: OSC32OUT
OSCIN-PD0	5	I/O		Default: OSCIN Remap: PD0
OSCOUT-PD1	6	I/O		Default: OSCOUT Remap: PD1
NRST	7	I/O		Default: NRST
PC0	8	I/O		Default: PC0 Alternate2: ADC012_IN10
PC1	9	I/O		Default: PC1 Alternate2: ADC012_IN11
PC2	10	I/O		Default: PC2 Alternate1: I2S1_ADD_SD Alternate2: ADC012_IN12
PC3	11	I/O		Default: PC3 Alternate2: ADC012_IN13
VSSA	12	P		Default: VSSA
VDDA	13	P		Default: VDDA
PA0-WKUP	14	I/O		Default: PA0 Alternate2: WKUP0, USART1_CTS, ADC012_IN0, TIMER1_CH0, TIMER1_ETI, TIMER4_CH0, TIMER7_ETI
PA1	15	I/O		Default: PA1 Alternate2: USART1_RTS, ADC012_IN1, TIMER4_CH1, TIMER1_CH1
PA2	16	I/O		Default: PA2 Alternate2: USART1_TX, TIMER4_CH2, ADC012_IN2, TIMER8_CH0(4), TIMER1_CH2, SPI0_IO2, WKUP3
PA3	17	I/O		Default: PA3 Alternate2: USART1_RX, TIMER4_CH3, ADC012_IN3, TIMER1_CH3, TIMER8_CH1(4), SPI0_IO3
VSS_4	18	P		Default: VSS_4
VDD_4	19	P		Default: VDD_4
PA4	20	I/O		Default: PA4 Alternate2: SPI0_NSS, USART1_CK, DAC0_OUT0,

GD32E503Rx LQFP64				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
				ADC01_IN4 Remap: SPI2_NSS, I2S2_WS
PA5	21	I/O		Default: PA5 Alternate2: SPI0_SCK, ADC01_IN5, DAC0_OUT1
PA6	22	I/O		Default: PA6 Alternate2: SPI0_MISO, TIMER7_BRKIN, ADC01_IN6, TIMER2_CH0, TIMER12_CH0(4) Remap: TIMER0_BRKIN
PA7	23	I/O		Default: PA7 Alternate2: SPI0_MOSI, TIMER7_CH0_ON, ADC01_IN7, TIMER2_CH1, TIMER13_CH0(4) Remap: TIMER0_CH0_ON
PC4	24	I/O		Default: PC4 Alternate2: ADC01_IN14
PC5	25	I/O		Default: PC5 Alternate2: ADC01_IN15, WKUP4
PB0	26	I/O		Default: PB0 Alternate2: ADC01_IN8, TIMER2_CH2, TIMER7_CH1_ON Remap: TIMER0_CH1_ON
PB1	27	I/O		Default: PB1 Alternate1: SHRTIMER_SCOUT Alternate2: ADC01_IN9, TIMER2_CH3, TIMER7_CH2_ON Remap: TIMER0_CH2_ON
PB2	28	I/O	5VT	Default: PB2, BOOT1 Alternate1: SHRTIMER_SCIN
PB10	29	I/O	5VT	Default: PB10 Alternate1: SHRTIMER_FLT2 Alternate2: I2C1_SCL, USART2_TX Remap: TIMER1_CH2
PB11	30	I/O	5VT	Default: PB11 Alternate1: SHRTIMER_FLT3 Alternate2: I2C1_SDA, USART2_RX Remap: TIMER1_CH3
VSS_1	31	P		Default: VSS_1
VDD_1	32	P		Default: VDD_1
PB12	33	I/O	5VT	Default: PB12 Alternate1: SHRTIMER_ST2CH0 Alternate2: SPI1_NSS, I2S1_WS, I2C1_SMBA, USART2_CK, TIMER0_BRKIN, CAN1_RX
PB13	34	I/O	5VT	Default: PB13 Alternate1: SHRTIMER_ST2CH1 Alternate2: SPI1_SCK, I2S1_CK, USART2_CTS, TIMER0_CH0_ON, CAN1_TX, I2C1_TXFRAME

GD32E503Rx LQFP64				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PB14	35	I/O	5VT	Default: PB14 Alternate1: SHRTIMER_ST3CH0, I2S1_ADD_SD Alternate2: SPI1_MISO, USART2_RTS, TIMER0_CH1_ON, TIMER11_CH0(4)
PB15	36	I/O	5VT	Default: PB15 Alternate1: SHRTIMER_ST3CH1 Alternate2: SPI1_MOSI, TIMER0_CH2_ON, I2S1_SD, TIMER11_CH1(4), WKUP6
PC6	37	I/O	5VT	Default: PC6 Alternate1: SHRTIMER_EXEV9, USART5_TX Alternate2: I2S1_MCK, TIMER7_CH0, SDIO_D6 Remap: TIMER2_CH0
PC7	38	I/O	5VT	Default: PC7 Alternate1: SHRTIMER_FLT4, USART5_RX Alternate2: I2S2_MCK, TIMER7_CH1, SDIO_D7 Remap: TIMER2_CH1
PC8	39	I/O	5VT	Default: PC8 Alternate1: SHRTIMER_ST4CH0, USART5_CK Alternate2: TIMER7_CH2, SDIO_D0 Remap: TIMER2_CH2
PC9	40	I/O	5VT	Default: PC9 Alternate1: SHRTIMER_ST4CH1, I2C2_SDA Alternate2: TIMER7_CH3, SDIO_D1 Remap: TIMER2_CH3
PA8	41	I/O	5VT	Default: PA8 Alternate1: SHRTIMER_ST0CH0, I2C2_SCL Alternate2: USART0_CK, TIMER0_CH0, CK_OUT, CTC_SYNC
PA9	42	I/O	5VT	Default: PA9 Alternate1: SHRTIMER_ST0CH1, I2C2_SMBA Alternate2: USART0_TX, TIMER0_CH1
PA10	43	I/O	5VT	Default: PA10 Alternate1: SHRTIMER_ST1CH0 Alternate2: USART0_RX, TIMER0_CH2
PA11	44	I/O		Default: PA11 Alternate1: SHRTIMER_ST1CH1, USART5_TX Alternate2: USART0_CTS, CAN0_RX, USBDM, TIMER0_CH3
PA12	45	I/O		Default: PA12 Alternate1: SHRTIMER_FLT0, USART5_RX Alternate2: USART0_RTS, CAN0_TX, USBDP, TIMER0_ETI
PA13	46	I/O	5VT	Default: JTMS, SWDIO Remap: PA13
VSS_2	47	P		Default: VSS_2

GD32E503Rx LQFP64				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
VDD_2	48	P		Default: VDD_2
PA14	49	I/O	5VT	Default: JTCK, SWCLK Remap: PA14
PA15	50	I/O	5VT	Default: JTDI Alternate1: SHRTIMER_FLT1 Alternate2: SPI2_NSS, I2S2_WS Remap: TIMER1_CH0, TIMER1_ETI, PA15, SPI0_NSS
PC10	51	I/O	5VT	Default: PC10 Alternate1: I2C2_SCL Alternate2: UART3_TX, SDIO_D2 Remap: USART2_TX, SPI2_SCK, I2S2_CK
PC11	52	I/O	5VT	Default: PC11 Alternate1: SHRTIMER_EXEV1, I2S2_ADD_SD Alternate2: UART3_RX, SDIO_D3 Remap: USART2_RX, SPI2_MISO
PC12	53	I/O	5VT	Default: PC12 Alternate1: SHRTIMER_EXEV0 Alternate2: UART4_TX, SDIO_CK Remap: USART2_CK, SPI2_MOSI, I2S2_SD
PD2	54	I/O	5VT	Default: PD2 Alternate2: TIMER2_ETI, UART4_RX, SDIO_CMD
PB3	55	I/O	5VT	Default: JTDO Alternate1: SHRTIMER_SCOUT, SHRTIMER_EXEV8 Alternate2: SPI2_SCK, I2S2_CK Remap: TIMER1_CH1, PB3, SPI0_SCK, TRACESWO
PB4	56	I/O	5VT	Default: NJTRST Alternate1: SHRTIMER_EXEV6, I2C2_SDA, I2S2_ADD_SD Alternate2: SPI2_MISO, I2C0_TXFRAME Remap: TIMER2_CH0, PB4, SPI0_MISO
PB5	57	I/O		Default: PB5 Alternate1: SHRTIMER_EXEV5, I2C2_SCL Alternate2: I2C0_SMBA, SPI2_MOSI, I2S2_SD, WKUP5 Remap: TIMER2_CH1, SPI0_MOSI, CAN1_RX
PB6	58	I/O	5VT	Default: PB6 Alternate1: SHRTIMER_SCIN, SHRTIMER_EXEV3 Alternate2: I2C0_SCL, TIMER3_CH0 Remap: USART0_TX, CAN1_TX, SPI0_IO2
PB7	59	I/O	5VT	Default: PB7 Alternate1: SHRTIMER_EXEV2 Alternate2: I2C0_SDA , TIMER3_CH1 Remap: USART0_RX, SPI0_IO3
BOOT0	60	I		Default: BOOT0
PB8	61	I/O	5VT	Default: PB8

GD32E503Rx LQFP64				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
				Alternate1: SHRTIMER_EXEV7, I2C2_SDA Alternate2: TIMER3_CH2, SDIO_D4, TIMER9_CH0(4) Remap: I2C0_SCL, CAN0_RX
PB9	62	I/O	5VT	Default: PB9 Alternate1: SHRTIMER_EXEV4 Alternate2: TIMER3_CH3, SDIO_D5, TIMER10_CH0(4) Remap: I2C0_SDA, CAN0_TX
VSS_3	63	P		Default: VSS_3
VDD_3	64	P		Default: VDD_3

Notes:

(1) Type: I = input, O = output, P = power.

(2) I/O Level: 5VT = 5 V tolerant.

(3) Alternate1: The specified function can be mapped to the specific pin by configuring AFIO_PCFA ~ AFIO_PCFG registers.

Alternate2: These functions can be enabled with correct GPIO and function module mode configurations.

Remap: A group of the specified module functions can be mapped to the specified pins by configuring AFIO_PCF0 ~ AFIO_PCF1 registers.

(4) Functions are available in GD32E503xE devices.

2.6.4. GD32E503Cx LQFP48 pin definitions

Table 2-6. GD32E503Cx LQFP48 pin definitions

GD32E503Cx LQFP48				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
VBAT	1	P		Default: VBAT
PC13-TAMPER-RTC	2	I/O		Default: PC13 Alternate2: TAMPER-RTC, WKUP1
PC14-OSC32IN	3	I/O		Default: PC14 Alternate2: OSC32IN
PC15-OSC32OUT	4	I/O		Default: PC15 Alternate2: OSC32OUT
OSCIN-PD0	5	I/O		Default: OSCIN Remap: PD0
OSCOUT-PD1	6	I/O		Default: OSCOUT Remap: PD1
NRST	7	I/O		Default: NRST
VSSA	8	P		Default: VSSA
VDDA	9	P		Default: VDDA
PA0-WKUP	10	I/O		Default: PA0 Alternate2: WKUP0, USART1_CTS, ADC012_IN0, TIMER1_CH0, TIMER1_ETI, TIMER4_CH0
PA1	11	I/O		Default: PA1 Alternate2: USART1_RTS, ADC012_IN1, TIMER4_CH1, TIMER1_CH1
PA2	12	I/O		Default: PA2 Alternate2: USART1_TX, TIMER4_CH2, ADC012_IN2, TIMER8_CH0(4), TIMER1_CH2, SPI0_IO2, WKUP3
PA3	13	I/O		Default: PA3 Alternate2: USART1_RX, TIMER4_CH3, ADC012_IN3, TIMER1_CH3, TIMER8_CH1(4), SPI0_IO3
PA4	14	I/O		Default: PA4 Alternate2: SPI0_NSS, USART1_CK, DAC0_OUT0, ADC01_IN4 Remap: SPI2_NSS, I2S2_WS
PA5	15	I/O		Default: PA5 Alternate2: SPI0_SCK, ADC01_IN5, DAC0_OUT1
PA6	16	I/O		Default: PA6 Alternate2: SPI0_MISO, ADC01_IN6, TIMER2_CH0, TIMER12_CH0(4) Remap: TIMER0_BRKIN
PA7	17	I/O		Default: PA7 Alternate2: SPI0_MOSI, ADC01_IN7, TIMER2_CH1, TIMER13_CH0(4) Remap: TIMER0_CH0_ON

GD32E503Cx LQFP48				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PB0	18	I/O		Default: PB0 Alternate2: ADC01_IN8, TIMER2_CH2 Remap: TIMER0_CH1_ON
PB1	19	I/O		Default: PB1 Alternate1: SHRTIMER_SCOUT Alternate2: ADC01_IN9, TIMER2_CH3 Remap: TIMER0_CH2_ON
PB2	20	I/O	5VT	Default: PB2, BOOT1 Alternate1: SHRTIMER_SCIN
PB10	21	I/O	5VT	Default: PB10 Alternate1: SHRTIMER_FLT2 Alternate2: I2C1_SCL, USART2_TX Remap: TIMER1_CH2
PB11	22	I/O	5VT	Default: PB11 Alternate1: SHRTIMER_FLT3 Alternate2: I2C1_SDA, USART2_RX Remap: TIMER1_CH3
VSS_1	23	P		Default: VSS_1
VDD_1	24	P		Default: VDD_1
PB12	25	I/O	5VT	Default: PB12 Alternate1: SHRTIMER_ST2CH0 Alternate2: SPI1_NSS, I2S1_WS, I2C1_SMBA, USART2_CK, TIMER0_BRKIN, CAN1_RX
PB13	26	I/O	5VT	Default: PB13 Alternate1: SHRTIMER_ST2CH1 Alternate2: SPI1_SCK, I2S1_CK, USART2_CTS, TIMER0_CH0_ON, CAN1_TX, I2C1_TXFRAME
PB14	27	I/O	5VT	Default: PB14 Alternate1: SHRTIMER_ST3CH0, I2S1_ADD_SD Alternate2: SPI1_MISO, USART2_RTS, TIMER0_CH1_ON, TIMER11_CH0(4)
PB15	28	I/O	5VT	Default: PB15 Alternate1: SHRTIMER_ST3CH1 Alternate2: SPI1_MOSI, TIMER0_CH2_ON, I2S1_SD, TIMER11_CH1(4), WKUP6
PA8	29	I/O	5VT	Default: PA8 Alternate1: SHRTIMER_ST0CH0, I2C2_SCL Alternate2: USART0_CK, TIMER0_CH0, CK_OUT, CTC_SYNC
PA9	30	I/O	5VT	Default: PA9 Alternate1: SHRTIMER_ST0CH1, I2C2_SMBA Alternate2: USART0_TX, TIMER0_CH1
PA10	31	I/O	5VT	Default: PA10 Alternate1: SHRTIMER_ST1CH0 Alternate2: USART0_RX, TIMER0_CH2

GD32E503Cx LQFP48				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PA11	32	I/O		Default: PA11 Alternate1: SHRTIMER_ST1CH1 Alternate2: USART0_CTS, CAN0_RX, USBDM, TIMER0_CH3
PA12	33	I/O		Default: PA12 Alternate1: SHRTIMER_FLT0 Alternate2: USART0_RTS, CAN0_TX, USBDP, TIMER0_ETI
PA13	34	I/O	5VT	Default: JTMS, SWDIO Remap: PA13
VSS_2	35	P		Default: VSS_2
VDD_2	36	P		Default: VDD_2
PA14	37	I/O	5VT	Default: JTCK, SWCLK Remap: PA14
PA15	38	I/O	5VT	Default: JTDI Alternate1: SHRTIMER_FLT1 Alternate2: SPI2_NSS, I2S2_WS Remap: TIMER1_CH0, TIMER1_ETI, PA15, SPI0_NSS
PB3	39	I/O	5VT	Default: JTDO Alternate1: SHRTIMER_SCOUT, SHRTIMER_EXEV8 Alternate2: SPI2_SCK, I2S2_CK Remap: TIMER1_CH1, PB3, SPI0_SCK, TRACESWO
PB4	40	I/O	5VT	Default: NJTRST Alternate1: SHRTIMER_EXEV6, I2C2_SDA, I2S2_ADD_SD Alternate2: SPI2_MISO, I2C0_TXFRAME Remap: TIMER2_CH0, PB4, SPI0_MISO
PB5	41	I/O		Default: PB5 Alternate1: SHRTIMER_EXEV5, I2C2_SCL Alternate2: I2C0_SMBA, SPI2_MOSI, I2S2_SD, WKUP5 Remap: TIMER2_CH1, SPI0_MOSI, CAN1_RX
PB6	42	I/O	5VT	Default: PB6 Alternate1: SHRTIMER_SCIN, SHRTIMER_EXEV3 Alternate2: I2C0_SCL, TIMER3_CH0 Remap: USART0_TX, CAN1_TX, SPI0_IO2
PB7	43	I/O	5VT	Default: PB7 Alternate1: SHRTIMER_EXEV2 Alternate2: I2C0_SDA, TIMER3_CH1 Remap: USART0_RX, SPI0_IO3
BOOT0	44	I		Default: BOOT0
PB8	45	I/O	5VT	Default: PB8 Alternate1: SHRTIMER_EXEV7, I2C2_SDA Alternate2: TIMER3_CH2, TIMER9_CH0(4) Remap: I2C0_SCL, CAN0_RX

GD32E503Cx LQFP48				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PB9	46	I/O	5VT	Default: PB9 Alternate1: SHRTIMER_EXEV4 Alternate2: TIMER3_CH3, TIMER10_CH0(4) Remap: I2C0_SDA, CAN0_TX
VSS_3	47	P		Default: VSS_3
VDD_3	48	P		Default: VDD_3

Notes:

(1) Type: I = input, O = output, P = power.

(2) I/O Level: 5VT = 5 V tolerant.

(3) Alternate1: The specified function can be mapped to the specific pin by configuring AFIO_PCFA ~ AFIO_PCFG registers.

Alternate2: These functions can be enabled with correct GPIO and function module mode configurations.

Remap: A group of the specified module functions can be mapped to the specified pins by configuring AFIO_PCF0 ~ AFIO_PCF1 registers.

(4) Functions are available in GD32E503xE devices.

2.6.5. GD32E503CEO7 QFN48 pin definitions

Table 2-7. GD32E503CEO7 QFN48 pin definitions

GD32E503CEO7 QFN48				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
VBAT	1	P		Default: VBAT
PC13-TAMPER-RTC	2	I/O		Default: PC13 Alternate2: TAMPER-RTC, WKUP1
PC14-OSC32IN	3	I/O		Default: PC14 Alternate2: OSC32IN
PC15-OSC32OUT	4	I/O		Default: PC15 Alternate2: OSC32OUT
OSCIN-PD0	5	I/O		Default: OSCIN Remap: PD0
OSCOUT-PD1	6	I/O		Default: OSCOUT Remap: PD1
NRST	7	I/O		Default: NRST
VSSA	8	P		Default: VSSA
VDDA	9	P		Default: VDDA
PA0-WKUP	10	I/O		Default: PA0 Alternate2: WKUP0, USART1_CTS, ADC012_IN0, TIMER1_CH0, TIMER1_ETI, TIMER4_CH0
PA1	11	I/O		Default: PA1

GD32E503CEO7 QFN48				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
				Alternate2: USART1_RTS, ADC012_IN1, TIMER4_CH1, TIMER1_CH1
PA2	12	I/O		Default: PA2 Alternate1: CMP1_OUT, Alternate2: USART1_TX, TIMER4_CH2, ADC012_IN2, TIMER8_CH0, TIMER1_CH2, SPI0_IO2, WKUP3, CMP1_IM6
PA3	13	I/O		Default: PA3 Alternate2: USART1_RX, TIMER4_CH3, ADC012_IN3, TIMER1_CH3, TIMER8_CH1, SPI0_IO3
PA4	14	I/O		Default: PA4 Alternate2: SPI0_NSS, USART1_CK, DAC0_OUT0, ADC01_IN4, CMP1_IM4, CMP3_IM4, CMP5_IM4 Remap: SPI2_NSS, I2S2_WS,
PA5	15	I/O		Default: PA5 Alternate2: SPI0_SCK, ADC01_IN5, DAC0_OUT1, CMP1_IM5, CMP3_IM5, CMP5_IM5
PA6	16	I/O		Default: PA6 Alternate2: SPI0_MISO, ADC01_IN6, TIMER2_CH0, TIMER12_CH0 Remap: TIMER0_BRKIN
PA7	17	I/O		Default: PA7 Alternate2: SPI0_MOSI, ADC01_IN7, TIMER2_CH1, TIMER13_CH0, CMP1_IP Remap: TIMER0_CH0_ON
PB0	18	I/O		Default: PB0 Alternate2: ADC01_IN8, TIMER2_CH2, CMP3_IP Remap: TIMER0_CH1_ON
PB1	19	I/O		Default: PB1 Alternate1: CMP3_OUT, SHRTIMER_SCOUT Alternate2: ADC01_IN9, TIMER2_CH3 Remap: TIMER0_CH2_ON
PB2	20	I/O	5VT	Default: PB2, BOOT1 Alternate1: SHRTIMER_SCIN Alternate2: CMP3_IM7
PB10	21	I/O	5VT	Default: PB10 Alternate1: SHRTIMER_FLT2 Alternate2: I2C1_SCL, USART2_TX Remap: TIMER1_CH2
PB11	22	I/O	5VT	Default: PB11 Alternate1: SHRTIMER_FLT3 Alternate2: I2C1_SDA, USART2_RX, CMP5_IP Remap: TIMER1_CH3
VSS_1	23	P		Default: VSS_1
VDD_1	24	P		Default: VDD_1

GD32E503CEO7 QFN48				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
PB12	25	I/O	5VT	Default: PB12 Alternate1: SHRTIMER_ST2CH0 Alternate2: SPI1_NSS, I2S1_WS, I2C1_SMBA, USART2_CK, TIMER0_BRKIN, CAN1_RX
PB13	26	I/O	5VT	Default: PB13 Alternate1: SHRTIMER_ST2CH1 Alternate2: SPI1_SCK, I2S1_CK, USART2_CTS, TIMER0_CH0_ON, CAN1_TX, I2C1_TXFRAME
PB14	27	I/O	5VT	Default: PB14 Alternate1: SHRTIMER_ST3CH0, I2S1_ADD_SD Alternate2: SPI1_MISO, USART2_RTS, TIMER0_CH1_ON, TIMER11_CH0
PB15	28	I/O	5VT	Default: PB15 Alternate1: SHRTIMER_ST3CH1 Alternate2: SPI1_MOSI, TIMER0_CH2_ON, I2S1_SD, TIMER11_CH11, WKUP6, CMP5_IM7
PA8	29	I/O	5VT	Default: PA8 Alternate1: SHRTIMER_ST0CH0, I2C2_SCL Alternate2: USART0_CK, TIMER0_CH0, CK_OUT, CTC_SYNC
PA9	30	I/O	5VT	Default: PA9 Alternate1: SHRTIMER_ST0CH1, I2C2_SMBA Alternate2: USART0_TX, TIMER0_CH1
PA10	31	I/O	5VT	Default: PA10 Alternate1: CMP5_OUT, SHRTIMER_ST1CH0 Alternate2: USART0_RX, TIMER0_CH2
PA11	32	I/O		Default: PA11 Alternate1: SHRTIMER_ST1CH1 Alternate2: USART0_CTS, CAN0_RX, USBDM, TIMER0_CH3
PA12	33	I/O		Default: PA12 Alternate1: CMP1_OUT, SHRTIMER_FLT0 Alternate2: USART0_RTS, CAN0_TX, USBDP, TIMER0_ETI
PA13	34	I/O	5VT	Default: JTMS, SWDIO Remap: PA13
VSS_2	35	P		Default: VSS_2
VDD_2	36	P		Default: VDD_2
PA14	37	I/O	5VT	Default: JTCK, SWCLK Remap: PA14
PA15	38	I/O	5VT	Default: JTDI Alternate1: SHRTIMER_FLT1 Alternate2: SPI2_NSS, I2S2_WS Remap: TIMER1_CH0, TIMER1_ETI, PA15, SPI0_NSS
PB3	39	I/O	5VT	Default: JTDO

GD32E503CEO7 QFN48				
Pin Name	**Pins**	**Pin Type(1)**	**I/O Level(2)**	**Functions description(3)**
				Alternate1: SHRTIMER_SCOUT, SHRTIMER_EXEV8 Alternate2: SPI2_SCK, I2S2_CK Remap: TIMER1_CH1, PB3, SPI0_SCK, TRACESWO
PB4	40	I/O	5VT	Default: NJTRST Alternate1: SHRTIMER_EXEV6, I2C2_SDA, I2S2_ADD_SD Alternate2: SPI2_MISO, I2C0_TXFRAME Remap: TIMER2_CH0, PB4, SPI0_MISO
PB5	41	I/O		Default: PB5 Alternate1: SHRTIMER_EXEV5, I2C2_SCL Alternate2: I2C0_SMBA, SPI2_MOSI, I2S2_SD, WKUP5 Remap: TIMER2_CH1, SPI0_MOSI, CAN1_RX
PB6	42	I/O	5VT	Default: PB6 Alternate1: SHRTIMER_SCIN, SHRTIMER_EXEV3 Alternate2: I2C0_SCL, TIMER3_CH0 Remap: USART0_TX, CAN1_TX, SPI0_IO2
PB7	43	I/O	5VT	Default: PB7 Alternate1: SHRTIMER_EXEV2 Alternate2: I2C0_SDA, TIMER3_CH1 Remap: USART0_RX, SPI0_IO3
BOOT0	44	I		Default: BOOT0
PB8	45	I/O	5VT	Default: PB8 Alternate1: SHRTIMER_EXEV7, I2C2_SDA Alternate2: TIMER3_CH2, TIMER9_CH0 Remap: I2C0_SCL, CAN0_RX
PB9	46	I/O	5VT	Default: PB9 Alternate1: CMP1_OUT, SHRTIMER_EXEV4 Alternate2: TIMER3_CH3, TIMER10_CH1 Remap: I2C0_SDA, CAN0_TX
VSS_3	47	P		Default: VSS_3
VDD_3	48	P		Default: VDD_3

Notes:

(1) Type: I = input, O = output, P = power.

(2) I/O Level: 5VT = 5 V tolerant.

(3) Alternate1: The specified function can be mapped to the specific pin by configuring AFIO_PCFA ~ AFIO_PCFG registers.

Alternate2: These functions can be enabled with correct GPIO and function module mode configurations.

Remap: A group of the specified module functions can be mapped to the specified pins by configuring AFIO_PCF0 ~ AFIO_PCF1 registers.

3. Functional description

3.1. Arm® Cortex®-M33 core

The Cortex®-M33 processor is a 32-bit processor that possesses low interrupt latency and low-cost debug. The characteristics of integrated and advanced make the Cortex®-M33 processor suitable for market products that require microcontrollers with high performance and low power consumption.

32-bit Arm® Cortex®-M33 processor core

- Up to 180 MHz operation frequency
- Ultra-low power, energy-efficient operation
- Integrated Nested Vectored Interrupt Controller (NVIC)
- 24-bit SysTick timer

The Cortex®-M33 processor is based on the ARMv8 architecture and supports both Thumb and Thumb-2 instruction sets. Some system peripherals listed below are also provided by Cortex®-M33:

- Internal Bus Matrix connected with Code bus, System bus, and Private Peripheral Bus (PPB) and debug accesses
- Nested Vectored Interrupt Controller (NVIC)
- Breakpoint Unit (BPU)
- Data Watchpoint and Trace (DWT)
- Instrumentation Trace Macrocell (ITM)
- Serial Wire JTAG Debug Port (SWJ-DP)
- Trace Port Interface Unit (TPIU)
- Memory Protection Unit (MPU)
- Floating Point Unit (FPU)
- DSP Extension (DSP)

3.2. Embedded memory

- Up to 512 Kbytes of Flash memory
- Up to 128 Kbytes of SRAM

512 Kbytes of inner Flash and 128 Kbytes of inner SRAM at most is available for storing programs and data, and Flash is accessed (Read) at CPU clock speed with 0~4 waiting time. *Table 2-2. GD32E503xx memory map* shows the memory map of the GD32E503xx series of devices, including code, SRAM, peripheral, and other pre-defined regions.

3.3. Clock, reset and supply management

- Internal 8 MHz factory-trimmed RC and external 4 to 32 MHz crystal oscillator
- Internal 48 MHz RC oscillator
- Internal 40 KHz RC calibrated oscillator and external 32.768 KHz crystal oscillator
- Integrated system clock PLL
- 1.71 to 3.63 V application supply and I/Os
- Supply Supervisor: POR (Power On Reset), PDR (Power Down Reset), and low voltage detector (LVD)

The Clock Control Unit (CCU) provides a range of oscillator and clock functions. These include speed internal RC oscillator and external crystal oscillator, high speed and low speed two types. Several prescalers allow the frequency configuration of the AHB and two APB domains. The maximum frequency of the AHB, APB2 and APB1 domains is 180 MHz/180 MHz/90 MHz. See ***Figure 2-7. GD32E503xx clock tree*** for details on the clock tree.

The Reset Control Unit (RCU) controls three kinds of reset: system reset resets the processor core and peripheral IP components. Power-on reset (POR) and power-down reset (PDR) are always active, and ensures proper operation starting from 1.56 V and down to 1.52V. The device remains in reset mode when V_{DD} is below a specified threshold. The embedded low voltage detector (LVD) monitors the power supply, compares it to the voltage threshold and generates an interrupt as a warning message for leading the MCU into security.

Power supply schemes:

- V_{DD} range: 1.71 to 3.63 V, external power supply for I/Os and the internal regulator. Provided externally through V_{DD} pins.
- V_{SSA}, V_{DDA} range: 1.71 to 3.63 V, external analog power supplies for ADC, reset blocks, RCs and PLL.
- V_{BAK} range: 1.71 to 3.63 V, power supply for RTC, external clock 32 kHz oscillator and backup registers (through power switch) when V_{DD} is not present.

3.4. Boot modes

At startup, boot pins are used to select one of three boot options:

- Boot from main Flash memory (default)
- Boot from system memory
- Boot from on-chip SRAM

In default condition, boot from main Flash memory is selected. The boot loader is located in the internal boot ROM memory (system memory). It is used to reprogram the Flash memory by using USART0 (PA9 and PA10) or USART1 (PD5 and PD6).

To ensure system reliability and stability, it is recommended not to connect peripherals that may generate interference signals (such as sensor outputs, watchdog chips, buttons, etc.) to the above-mentioned pins during the hardware design stage, in order to avoid affecting the

normal function of the Bootloader and causing abnormal outputs to the connected peripherals.

Note: When booting from system memory, the USART RX pins (PA10/ PD6) are in input level detection mode. Therefore, unused USART RX pins (PA10/PD6) need to be kept at a stable logic level to prevent false triggering.

3.5. Power saving modes

The MCU supports five kinds of power saving modes to achieve even lower power consumption. They are Sleep, Deep-sleep, Deep-sleep 1, Deep-sleep 2 and Standby mode. These operating modes reduce the power consumption and allow the application to achieve the best balance between the CPU operating time, speed and power consumption.

- **Sleep** mode
  In sleep mode, only the clock of CPU core is off. All peripherals continue to operate and any interrupt/event can wake up the system.
- **Deep-sleep** mode
  In Deep-sleep mode, all clocks in the V_{CORE} domain are off, and all of IRC8M, IRC48M, HXTAL and PLLs are disabled. The contents of SRAM and registers are preserved. Any interrupt or wakeup event from EXTI lines can wake up the system from the deep-sleep mode including the 16 external lines, the RTC alarm, LVD output, USB wakeup, I2C2 wakeup and USART5 wakeup. When exiting the deep-sleep mode, the IRC8M is selected as the system clock.
- **Deep-sleep 1** mode
  In Deep-sleep 1 mode, all clocks in the V_{CORE} domain are off, and all of IRC8M, IRC48M, HXTAL and PLLs are disabled. The power of COREOFF1 domain is cut off. The contents of registers in COREOFF1 domain are lost. Any interrupt or wakeup event from EXTI lines can wake up the system from the deep-sleep 1 mode including the 16 external lines, the RTC alarm, LVD output, USB wakeup, I2C2 wakeup and USART5 wakeup. Waking up from Deep-sleep 1 mode needs an additional delay to power on COREOFF1 domain. When exiting the deep-sleep 1 mode, the IRC8M is selected as the system clock.
- **Deep-sleep 2** mode
  In Deep-sleep 2 mode, all clocks in the V_{CORE} domain are off, and all of IRC8M, IRC48M, HXTAL and PLLs are disabled. The power of COREOFF0/COREOFF1 domain is cut off. The contents of SRAM except for the first 32K and registers in COREOFF0/COREOFF1 domain are lost. Any interrupt or wakeup event from EXTI lines can wake up the system from the deep-sleep mode including the 16 external lines, the RTC alarm, LVD output, USB wakeup, I2C2 wakeup and USART5 wakeup. Waking up from Deep-sleep 2 mode needs an additional delay to power on COREOFF1 domain. Waking up from Deep-sleep 2 mode needs an additional delay to power on COREOFF0/COREOFF1 domain. When exiting the deep-sleep 2 mode, the IRC8M is selected as the system clock.
- **Standby** mode
  In Standby mode, the whole V_{CORE} domain is power off, the LDO is shut down, and all of IRC8M, IRC48M, HXTAL and PLL are disabled. There are four wakeup sources for the Standby mode, including the external reset from NRST pin, the RTC alarm, the FWDGT

reset, and the rising edge on WKUP pins.

3.6. Analog to digital converter (ADC)

- 12-bit SAR ADC's conversion rate is up to 2.5 MSPS
- 12-bit, 10-bit, 8-bit or 6-bit configurable resolution
- Hardware oversampling ratio adjustable from 2 to 256x improves resolution to 16-bit
- Input voltage range: V_{REF-} to V_{REF+}
- Temperature sensor

Three 12-bit 2.5 MSPS multi-channel ADCs are integrated in the device. It has a total of 23 multiplexed channels: up to 21 external channels, 1 channel for internal temperature sensor (V_{SENSE}) and 1 channel for internal reference voltage (V_{REFINT}). The input voltage range is between V_{REF-} and V_{REF+}. An on-chip hardware oversampling scheme improves performance while off-loading the related computational burden from the CPU. The analog watchdog allows the application to detect whether the input voltage goes outside the user-defined higher or lower thresholds. A configurable channel management block can be used to perform conversions in single, continuous, scan or discontinuous mode to support more advanced use.

The ADC can be triggered from the events generated by the general level 0 timers (TIMERx), the advanced timers (TIMER0 and TIMER7) and SHRTIMER with internal connection. The temperature sensor can be used to generate a voltage that varies linearly with temperature. It is internally connected to the ADC_IN16 input channel which is used to convert the sensor output voltage in a digital value.

To ensure a high accuracy on ADC and DAC, the ADC/DAC independent external reference voltage should be connected to V_{REF+}/V_{REF-} pins. According to the different packages, V_{REF+} pin can be connected to V_{DDA} pin, or external reference voltage, V_{REF-} pin must be connected to V_{SSA} pin. The V_{REF+} pin is only available on no less than 100-pin packages, or else the V_{REF+} pin is not available and internally connected to V_{DDA}. The V_{REF-} pin is only available on no less than 100-pin packages, or else the V_{REF-} pin is not available and internally connected to V_{SSA}.

3.7. Digital to analog converter (DAC)

- Two 12-bit DACs with independent output channels
- 8-bit or 12-bit mode in conjunction with the DMA controller

The 12-bit buffered DAC is used to generate variable analog outputs. The DAC channels can be triggered by the timer, SHRTIMER or EXTI with DMA support. In dual DAC channel operation, conversions could be done independently or simultaneously. The maximum output value of the DAC is V_{REF+}.

3.8. DMA

- 7 channels for DMA0 controller and 5 channels for DMA1 controller
- Peripherals supported: Timers, SHRTIMER, SDIO, ADCs, DACs, SPIs, I2Cs, USARTs and I2S

The flexible general-purpose DMA controllers provide a hardware method of transferring data between peripherals and/or memory without intervention from the CPU, thereby freeing up bandwidth for other system functions. Three types of access method are supported: peripheral to memory, memory to peripheral, memory to memory.

Each channel is connected to fixed hardware DMA requests. The priorities of DMA channel requests are determined by software configuration and hardware channel number. Transfer size of source and destination are independent and configurable.

3.9. General-purpose inputs/outputs (GPIOs)

- Up to 112 fast GPIOs, all mappable on 16 external interrupt lines
- Analog input/output configurable
- Alternate function input/output configurable

There are up to 112 general purpose I/O pins (GPIO) in GD32E503xx, named PA0 ~ PA15, PB0 ~ PB15, PC0 ~ PC15, PD0 ~ PD15, PE0 ~ PE15, PF0 ~ PF15 and PG0 ~ PG15 to implement logic input/output functions. Each of the GPIO ports has related control and configuration registers to satisfy the requirements of specific applications. The external interrupts on the GPIO pins of the device have related control and configuration registers in the Interrupt/event controller (EXTI). The GPIO ports are pin-shared with other alternative functions (AFs) to obtain maximum flexibility on the package pins. Each of the GPIO pins can be configured by software as output (push-pull or open-drain), input, peripheral alternate function or analog mode. Most of the GPIO pins are shared with digital or analog alternate functions.

3.10. Timers and PWM generation

- Two 16-bit advanced timer (TIMER0, TIMER7), one 32-bit general timer (TIMER1), up to nine 16-bit general timers (TIMER2 ~ TIMER4, TIMER8 ~ TIMER13), and two 16-bit basic timer (TIMER5, TIMER6)
- Up to 4 independent channels of PWM, output compare or input capture for each general timer and external trigger input
- 16-bit, motor control PWM advanced timer with programmable dead-time generation for output match
- Encoder interface controller with two inputs using quadrature decoder
- 24-bit SysTick timer down counter
- 2 watchdog timers (free watchdog timer and window watchdog timer)

The advanced timer (TIMER0, TIMER7) can be used as a three-phase PWM multiplexed on 6 channels. It has complementary PWM outputs with programmable dead-time generation. It can also be used as a complete general timer. The 4 independent channels can be used for input capture, output compare, PWM generation (edge- or center- aligned counting modes) and single pulse mode output. If configured as a general 16-bit timer, it has the same functions as the TIMERx timer. It can be synchronized with external signals or to interconnect with other general timers together which have the same architecture and features.

The general timer can be used for a variety of purposes including general time, input signal pulse width measurement or output waveform generation such as a single pulse generation or PWM output, up to 4 independent channels for input capture/output compare. TIMER1 is based on a 32-bit auto-reload up/down counter and a 16-bit prescaler. TIMER2 ~ TIMER4 is based on a 16-bit auto-reload up/down counter and a 16-bit prescaler. TIMER8 ~ TIMER13 is based on a 16-bit auto-reload up counter and a 16-bit prescaler. The general timer also supports an encoder interface with two inputs using quadrature decoder.

The basic timer, known as TIMER5 &TIMER6, are mainly used for DAC trigger generation. They can also be used as a simple 16-bit time base.

The GD32E503xx have two watchdog peripherals, free watchdog timer and window watchdog timer. They offer a combination of high safety level, flexibility of use and timing accuracy.

The free watchdog timer includes a 12-bit down-counting counter and an 8-stage prescaler. It is clocked from an independent 40 KHz internal RC and as it operates independently of the main clock, it can operate in deep-sleep, deep-sleep 1, deep-sleep 2 and standby modes. It can be used either as a watchdog to reset the device when a problem occurs, or as a free-running timer for application timeout management.

The window watchdog timer is based on a 7-bit down counter that can be set as free-running. It can be used as a watchdog to reset the device when a problem occurs. It is clocked from the main clock. It has an early wakeup interrupt capability and the counter can be frozen in debug mode.

The SysTick timer is dedicated for OS, but could also be used as a standard down counter. The features are shown below:

- A 24-bit down counter
- Auto reload capability
- Maskable system interrupt generation when the counter reaches 0
- Programmable clock source

3.11. Real time clock (RTC)

- 32-bit programmable counter with a programmable 20-bit prescaler
- Alarm function
- Interrupt and wakeup event

The real time clock is an independent timer which provides a set of continuously running

counters in backup registers to provide a real calendar function, and provides an alarm interrupt or an expected interrupt. The RTC features a 32-bit programmable counter for long-term measurement using the compare register to generate an alarm. A 20-bit prescaler is used for the time base clock and is by default configured to generate a time base of 1 second from a clock at 32.768 KHz from external crystal oscillator.

3.12. Inter-integrated circuit (I2C)

I2C0 and I2C1:

- Support both master and slave mode with a frequency up to 1 MHz (Fast mode plus)
- Provide arbitration function, optional PEC (packet error checking) generation and checking
- Supports 7-bit and 10-bit addressing mode and general call addressing mode
- SMBus 2.0 and PMBus compatible
- Supports SAM_V mode

I2C2:

- Support both master and slave mode with a frequency up to 1 MHz (Fast mode plus)
- Provide arbitration function, optional PEC (packet error checking) generation and checking
- Supports 7-bit and 10-bit addressing mode and general call addressing mode
- SMBus 3.0 and PMBus 1.3 compatible
- Wakeup from Deep-sleep mode on address match

The I2C interface is an internal circuit allowing communication with an external I2C interface which is an industry standard two line serial interface used for connection to external hardware. These two serial lines are known as a serial data line (SDA) and a serial clock line (SCL). The I2C module provides different data transfer rates: up to 100 KHz in standard mode, up to 400 KHz in the fast mode and up to 1 MHz in the fast mode plus. The I2C module also has an arbitration detect function to prevent the situation where more than one master attempts to transmit data to the I2C bus at the same time. A CRC-8 calculator is also provided in I2C interface to perform packet error checking for I2C data.

3.13. Serial peripheral interface (SPI)

- Up to three SPI interfaces
- Support both master and slave mode
- Hardware CRC calculation and transmit automatic CRC error checking
- Quad-SPI configuration available in master mode (only in SPI0)

The SPI interface uses 4 pins, among which are the serial data input and output lines (MISO & MOSI), the clock line (SCK) and the slave select line (NSS). All SPIs can be served by the DMA controller. The SPI interface may be used for a variety of purposes, including simplex synchronous transfers on two lines with a possible bidirectional data line or reliable communication using CRC checking. Quad-SPI master mode is also supported in SPI0.

3.14. Universal synchronous asynchronous receiver transmitter (USART)

USART0~2, UART3~4:

- Maximum speed up to 22.5 MBits/s for USART0
- Maximum speed up to 11.25 MBits/s for USART1~2, UART3~4
- Supports both asynchronous and clocked synchronous serial communication modes
- IrDA SIR encoder and decoder support
- LIN break generation and detection
- ISO 7816-3 compliant smart card interface

USART5:

- Maximum speed up to 22.5 MBits/s
- Supports both asynchronous and clocked synchronous serial communication modes
- IrDA SIR encoder and decoder support
- LIN break generation and detection
- ISO 7816-3 compliant smart card interface
- Dual clock domain
- Wake up from Deep-sleep mode

The USART (USART0, USART1, USART2, USART5) are used to translate data between parallel and serial interfaces, provides a flexible full duplex data exchange using synchronous or asynchronous transfer. It is also commonly used for RS-232 standard communication. The USART includes a programmable baud rate generator which is capable of dividing the system clock to produce a dedicated clock for the USART transmitter and receiver. The USART also supports DMA function for high speed data communication.

3.15. Inter-IC sound (I2S)

- Two I2S bus Interfaces with sampling frequency from 8 KHz to 192 KHz
- Support either master or slave mode

The Inter-IC sound (I2S) bus provides a standard communication interface for digital audio applications by 4-wire serial lines. GD32E503xx contain an I2S-bus interface that can be operated with 16/32 bit resolution in master or slave mode, pin multiplexed with SPI1 and SPI2. The audio sampling frequency from 8 KHz to 192 KHz is supported.

3.16. Universal Serial Bus full-speed device interface (USBD)

- USB 2.0 full-speed device controller.
- Support USB 2.0 Link Power Management.
- Shared dedicated 512-byte SRAM used for data packet buffer with CAN.
- Integrated USB PHY.

The Universal Serial Bus full-speed device interface (USBD) module contains a full-speed internal USB PHY and no more external PHY chip is needed. USBD supports all the four types of transfer (control, bulk, interrupt and isochronous) defined in USB 2.0 protocol. USBD supports 8 USB endpoints that can be individually configured.

3.17. Controller area network (CAN)

- Two CAN interfaces supports the CAN protocols version 2.0A and B, ISO11891-1:2015 specification with baud rates up to 1 Mbit/s when classical frames.

Controller area network (CAN) is a method for enabling serial communication in field bus. The CAN protocol has been used extensively in industrial automation and automotive applications. It can receive and transmit standard frames with 11-bit identifiers as well as extended frames with 29-bit identifiers. Each CAN has three mailboxes for transmission and two FIFOs of three messages depth for reception. The CAN0 and CAN1 provides 28 scalable/configurable identifier filter banks for selecting the incoming messages needed and discarding the others.

3.18. External memory controller (EXMC)

- Supported external memory: SRAM, PSRAM, ROM and NOR-Flash, NAND Flash and PC card
- Up to 16-bit data bus
- Support to interface with Motorola 6800 and Intel 8080 type LCD directly

External memory controller (EXMC) is an abbreviation of external memory controller. It is divided in to several sub-banks for external device support, each sub-bank has its own chip selection signal but at one time, only one bank can be accessed. The EXMC support code execution from external memory except NAND Flash and PC card. The EXMC also can be configured to interface with the most common LCD module of Motorola 6800 and Intel 8080 series and reduce the system cost and complexity.

3.19. Secure digital input/output interface (SDIO)

- Support SD2.0/SDIO2.0/MMC4.2/CE-ATA1.1 host and device interface

The Secure Digital Input and Output Card Interface (SDIO) provides access to external SD memory cards specifications version 2.0, SDIO card specification version 2.0, multi-media card system specification version 4.2 and CE-ATA digital protocol version 1.1 with DMA supported.

3.20. Comparators (CMP)

- Three fast rail-to-rail low-power comparators with software configurable

- Programmable reference voltage (internal or external I/O)

Three Comparators (CMP) are implemented within the devices. They can work either standalone (all terminal are available on I/Os) or together with the timers. The internal voltage reference is also connected to ADC_IN17 input channel of the ADC.

3.21. Super High-Resolution Timer (SHRTIMER)

- High- precision timing units: Master_TIMER, Slave_TIMERx (x=0..4).
- Synchronization outputs: synchronize external resources as master.
- Synchronization inputs: be synchronized as a slaver.
- Bunch mode controller to handle light-load operation.
- 6 DMA request: Master_TIMER requests, Slave_TIMERx (x=0..4) requests.

SHRTIMER has a high-precision counting clock and can be used for high-precision timing. It can generate 10 high precision and flexible digital signals to control motor or be used for power management applications. It has multiple internal signals connected to the ADC and DAC. It can be used for control and monitoring purposes. It can handle various fault input for safe purposes.

3.22. Serial/Quad Parallel Interface (SQPI)

- SQPI controller support configuring output clock frequency which is divided by HCLK.
- SQPI controller support no address phase and data phase operation which is named special command by the controller.
- SQPI controller support 256MB external memory space.
  Logic memory address range: 0xB000_0000 - 0xBFFF_FFFF.
- SQPI controller support 6 types mode for different combination of command, address, waitcycle, and data phase.

Serial/Quad Parallel Interface (SQPI) is a controller for external serial/dual/quad parallel interface memory peripheral. For example: SQPI-PSRAM and SQPI-FLASH. With this controller, users can use external SQPI interface memory as SRAM simply.

3.23. Debug mode

- Serial wire JTAG debug port (SWJ-DP)

The Arm® SWJ-DP Interface is embedded and is a combined JTAG and serial wire debug port that enables either a serial wire debug or a JTAG probe to be connected to the target.

3.24. Package and operation temperature

- LQFP144 (GD32E503Zx), LQFP100 (GD32E503Vx), LQFP64 (GD32E503Rx) and

LQFP48 (GD32E503Cx), QNF48 (GD32E503CEO7).

- Operation temperature range: -40°C to +105°C for grade 7 devices.
- Operation temperature range: -40°C to +85°C for grade 6 devices.

4. Electrical characteristics

4.1. Absolute maximum ratings

The maximum ratings are the limits to which the device can be subjected without permanently damaging the device. Note that the device is not guaranteed to operate properly over the maximum ratings. Exposure to the absolute maximum rating conditions for extended periods may affect device reliability.

Table 4-1. Absolute maximum ratings(1)(4)

Symbol	Parameter	Min	Max	Unit
V_{DD}	External voltage range(2)	V_{SS} - 0.3	V_{SS} + 3.63	V
V_{DDA}	External analog supply voltage	V_{SSA} - 0.3	V_{SSA} + 3.63	V
V_{BAT}	External battery supply voltage	V_{SS} - 0.3	V_{SS} + 3.63	V
V_{IN}	Input voltage on 5V tolerant pin(3)	V_{SS} - 0.3	V_{DD} + 3.63	V
	Input voltage on other I/O	V_{SS} - 0.3	3.63	V
$\|\Delta V_{DDx}\|$	Variations between different VDD power pins	-	50	mV
$\|V_{SSx}-V_{SS}\|$	Variations between different ground pins	-	50	mV
I_{IO}	Maximum current for GPIO pins	-	+/-25	mA
I_{IOS}	Maximum current for multiple IO(6)	-	100	mA
T_A	Operating temperature range	-40	+85	°C
P_D	Power dissipation at T_A = 85°C of LQFP144(5)	-	820	mW
	Power dissipation at T_A = 85°C of LQFP100(5)	-	813	
	Power dissipation at T_A = 85°C of LQFP64(5)	-	733	
	Power dissipation at T_A = 85°C of LQFP48(5)	-	574	
	Power dissipation at T_A = 105°C of LQFP48(5)	-	287	
	Power dissipation at T_A = 105°C of QFN48(5)	-	418	
T_{STG}	Storage temperature range	-65	+150	°C
T_J	Maximum junction temperature	-	125	°C

(1) Guaranteed by design, not tested in production.

(2) All main power and ground pins should be connected to an external power source within the allowable range.

(3) V_{IN} maximum value cannot exceed 5.5 V.

(4) It is recommended that V_{DD} and V_{DDA} are powered by the same source. The maximum difference between V_{DD} and V_{DDA} does not exceed 300 mV during power-up and operation.

(5) For grade 6 devices, the parameter of T_A=85°C, For grade 7 devices, the parameter of T_A=105°C.

(6) T_J = 110°C.

4.2. Operating conditions characteristics


Table 4-2. DC operating conditions

Symbol	Parameter	Conditions	Min(1)	Typ	Max(1)	Unit
V_{DD}	Supply voltage	-	1.71	3.3	3.63	V
V_{DDA}	Analog supply voltage, f_{ADCMAX} = 35 MHz	-	2.4	3.3	3.63	V
	Analog supply voltage, f_{ADCMAX} = 14 MHz		1.71	-	3.63	
V_{BAT}	Battery supply voltage	-	1.71(2)	-	3.63	V
V_{CORE}	Core logic supply voltage powered by internal voltage regulator	-	-	1.1	-	V

(1) Based on characterization, not tested in production.

(2) In the application which V_{BAT} supply the backup domains, if the VBAT voltage drops below the minimum value, when V_{DD} is powered on again, it is necessary to refresh the registers of backup domains and enable LXTAL again.

Figure 4-1. Recommended power supply decoupling capacitors(1)(2)

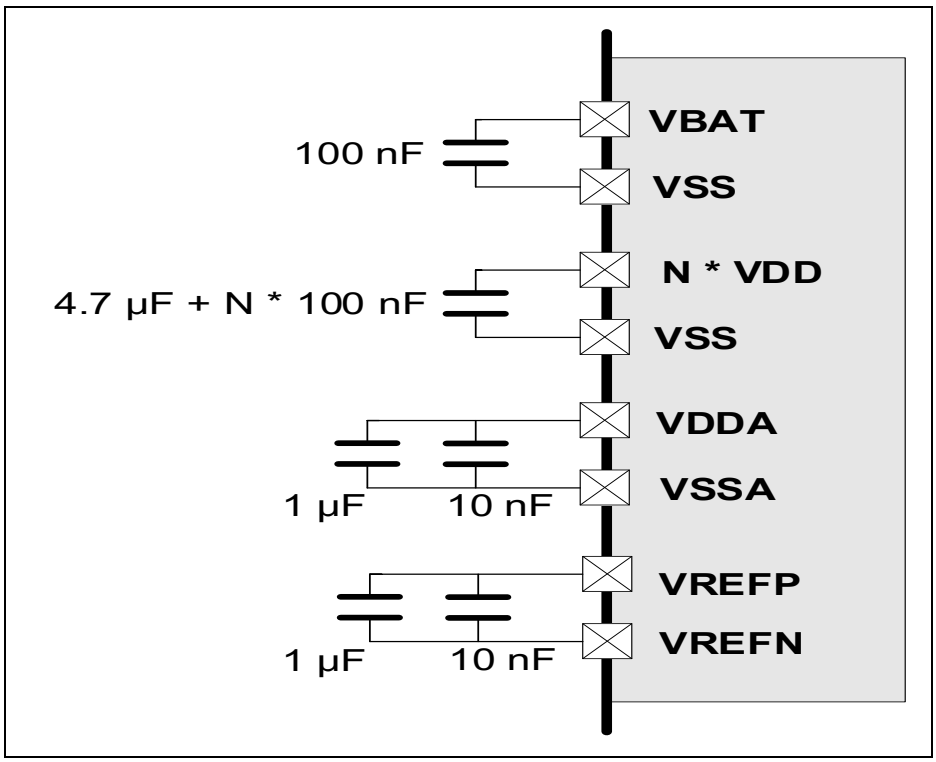

(1) The VREFP and VREFN pins are only available on no less than 100-pin packages, or else the VREFP and VREFN pins are not available and internally connected to VDDA and VSSA pins.

(2) All decoupling capacitors need to be as close as possible to the pins on the PCB board.

Table 4-3. Clock frequency(1)

Symbol	Parameter	Conditions	Min	Max	Unit
f_{HCLK}	AHB clock frequency	-	-	180	MHz
f_{APB1}	APB1 clock frequency	-	-	90	MHz
f_{APB2}	APB2 clock frequency	-	-	180	MHz

(1) Guaranteed by design, not tested in production.

Table 4-4. Operating conditions at Power up/ Power down(1)

Symbol	Parameter	Conditions	Min	Max	Unit
t_{VDD}	V_{DD} rise time rate	-	0	∞	μs/ V
	V_{DD} fall time rate		50	∞	

(1) Guaranteed by design, not tested in production.

Table 4-5. Start-up timings of Operating conditions(1)(2)(3)

Symbol	Parameter	Conditions	Typ	Unit
$t_{start-up}$	Start-up time	Clock source from HXTAL	608	μs
		Clock source from IRC8M	74	

(1) Based on characterization, not tested in production.

(2) After power-up, the start-up time is the time between the rising edge of NRST high and the first I/O instruction conversion in SystemInit function.

(3) PLL is off.

Table 4-6. Power saving mode wakeup timings characteristics(1)(2)

Symbol	Parameter	Typ	Unit
t_{Sleep}	Wakeup from Sleep mode	1.7	μs
$t_{Deep-sleep}$	Wakeup from Deep-sleep mode (LDO On)	3.1	
	Wakeup from Deep-sleep mode (LDO in low power mode)	3.1	
	Wakeup from Deep-sleep mode1 (LDO in low power and low driver mode)	4.3	
	Wakeup from Deep-sleep mode2 (LDO in low power and low driver mode)	11.7	
$t_{Standby}$	Wakeup from Standby mode	77.2	

(1) Based on characterization, not tested in production.

(2) The wakeup time is measured from the wakeup event to the point at which the application code reads the first instruction under the below conditions: V_{DD} = V_{DDA} = 3.3 V, IRC8M = System clock = 8 MHz.

4.3. Power consumption

The power measurements specified in the tables represent that code with data executing from on-chip Flash with the following specifications.

Table 4-7. Power consumption characteristics(2)(3)(4)(5)(6)

Symbol	Parameter	Conditions	Min	Typ(1)	Max	Unit
$I_{DD}+I_{DDA}$	Supply current (Run mode)	V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 180 MHz, All peripherals enabled	-	59.8	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 180 MHz, All peripherals disabled	-	26.1	-	mA

Symbol	Parameter	Conditions	Min	Typ(1)	Max	Unit
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 160 MHz, All peripherals enabled	-	53.6	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 160 MHz, All peripherals disabled	-	23.5	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 120 MHz, All peripherals enabled	-	41	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 120 MHz, All peripherals disabled	-	18.2	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 108 MHz, All peripherals enabled	-	37.2	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 108 MHz, All peripherals disabled	-	16.6	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 96 MHz, All peripherals enabled	-	33.4	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 96 MHz, All peripherals disabled	-	15	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 72 MHz, All peripherals enabled	-	25.7	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 72 MHz, All peripherals disabled	-	11.8	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 48 MHz, All peripherals enabled	-	18	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 48 MHz, All peripherals disabled	-	7.96	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 36 MHz, All peripherals enabled	-	14	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 36 MHz, All peripherals disabled	-	6.49	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz,	-	9.73	-	mA

Symbol	Parameter	Conditions	Min	Typ(1)	Max	Unit
		System clock = 24 MHz, All peripherals enabled				
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 24 MHz, All peripherals disabled	-	4.83	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 16 MHz, All peripherals enabled	-	7.2	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 16 MHz, All peripherals disabled	-	3.9	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 8 MHz, All peripherals enabled	-	4.62	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System clock = 8 MHz, All peripherals disabled	-	2.9	-	mA
	Supply current (Sleep mode)	V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 180 MHz, CPU clock off, All peripherals enabled	-	47.8	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 180 MHz, CPU clock off, All peripherals disabled	-	9.5	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 160 MHz, CPU clock off, All peripherals enabled	-	42.8	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 160 MHz, CPU clock off, All peripherals disabled	-	8.7	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 120 MHz, CPU clock off, All peripherals enabled	-	32.8	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 120 MHz, CPU clock off, All peripherals disabled	-	7.07	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 108 MHz, CPU clock off, All peripherals enabled	-	29.8	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 108 MHz, CPU clock off, All peripherals disabled	-	6.57	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 96 MHz, CPU clock off, All	-	26.7	-	mA

Symbol	Parameter	Conditions	Min	Typ(1)	Max	Unit
		peripherals enabled				
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 96 MHz, CPU clock off, All peripherals disabled	-	6.1	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 72 MHz, CPU clock off, All peripherals enabled	-	20.7	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 72 MHz, CPU clock off, All peripherals disabled	-	5.1	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 48 MHz, CPU clock off, All peripherals enabled	-	14.5	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 48 MHz, CPU clock off, All peripherals disabled	-	4.1	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 36 MHz, CPU clock off, All peripherals enabled	-	11.4	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 36 MHz, CPU clock off, All peripherals disabled	-	3.6	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 24 MHz, CPU clock off, All peripherals enabled	-	8.3	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 24 MHz, CPU clock off, All peripherals disabled	-	3.1	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 16 MHz, CPU clock off, All peripherals enabled	-	6.2	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 16 MHz, CPU clock off, All peripherals disabled	-	2.7	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 8 MHz, CPU clock off, All peripherals enabled	-	4.2	-	mA
		V_{DD} = V_{DDA} = 3.3 V, HXTAL = 25 MHz, System Clock = 8 MHz, CPU clock off, All peripherals disabled	-	2.4	-	mA
	Supply current (Deep-Sleep mode)	V_{DD} = V_{DDA} = 3.3 V, LDO in normal power and normal driver mode, IRC40K off, RTC off	-	461.33	-	μA

Symbol	Parameter	Conditions	Min	Typ(1)	Max	Unit
		V_{DD} = V_{DDA} = 3.3 V, LDO in low power and normal driver mode, IRC40K off, RTC off	-	413.00	-	μA
		V_{DD} = V_{DDA} = 3.3 V, LDO in normal power and low driver mode, IRC40K off, RTC off	-	258.00	-	μA
		V_{DD} = V_{DDA} = 3.3 V, LDO in low power and low driver mode, IRC40K off, RTC off	-	210.67	-	μA
	Supply current (Deep-Sleep 1 mode)	V_{DD} = V_{DDA} = 3.3 V, LDO in low power and low driver mode, IRC40K off, RTC off	-	163.33	-	μA
	Supply current (Deep-Sleep 2 mode)	V_{DD} = V_{DDA} = 3.3 V, LDO in low power and low driver mode, IRC40K off, RTC off	-	68.00	-	μA
	Supply current (Standby mode)	V_{DD} = V_{DDA} = 3.3 V, LXTAL off, IRC40K on, RTC on	-	3.79	-	μA
		V_{DD} = V_{DDA} = 3.3 V, LXTAL off, IRC40K on, RTC off	-	3.58	-	μA
		V_{DD} = V_{DDA} = 3.3 V, LXTAL off, IRC40K off, RTC off	-	3.08	-	μA
I_{BAT}	Battery supply current (Backup mode)	V_{DD} off, V_{DDA} off, V_{BAT} = 3.63 V, LXTAL on with external crystal, RTC on, LXTAL High driving	-	1.95	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 3.3 V, LXTAL on with external crystal, RTC on, LXTAL High driving	-	1.82	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 2.5 V, LXTAL on with external crystal, RTC on, LXTAL High driving	-	1.67	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 1.8 V, LXTAL on with external crystal, RTC on, LXTAL High driving	-	1.59	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 3.63 V, LXTAL on with external crystal, RTC on, LXTAL Medium High driving	-	1.53	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 3.3 V, LXTAL on with external crystal, RTC on, LXTAL Medium High driving	-	1.40	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 2.5 V, LXTAL on with external crystal, RTC on, LXTAL Medium High driving	-	1.25	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 1.8 V, LXTAL on with external crystal, RTC on, LXTAL	-	1.18	-	μA

Symbol	Parameter	Conditions	Min	Typ(1)	Max	Unit
		Medium High driving				
		V_{DD} off, V_{DDA} off, V_{BAT} = 3.63 V, LXTAL on with external crystal, RTC on, LXTAL Medium Low driving	-	1.12	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 3.3 V, LXTAL on with external crystal, RTC on, LXTAL Medium Low driving	-	0.99	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 2.5 V, LXTAL on with external crystal, RTC on, LXTAL Medium Low driving	-	0.84	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 1.8 V, LXTAL on with external crystal, RTC on, LXTAL Medium Low driving	-	0.77	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 3.63 V, LXTAL on with external crystal, RTC on, LXTAL Low driving	-	1.00	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 3.3 V, LXTAL on with external crystal, RTC on, LXTAL Low driving	-	0.87	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 2.5 V, LXTAL on with external crystal, RTC on, LXTAL Low driving	-	0.72	-	μA
		V_{DD} off, V_{DDA} off, V_{BAT} = 1.8 V, LXTAL on with external crystal, RTC on, LXTAL Low driving	-	0.64	-	μA

(1) Based on characterization, not tested in production.
(2) Unless otherwise specified, all values given for T_A = 25 ℃ and test result is mean value.
(3) When System Clock is less than 4 MHz, an external source is used, and the HXTAL bypass function is needed, no PLL.
(4) When System Clock is greater than 8 MHz, a crystal 8 MHz is used, and the HXTAL bypass function is closed, using PLL.
(5) When analog peripheral blocks such as ADCs, DACs, HXTAL, LXTAL, IRC8M, or IRC40K are ON, an additional power consumption should be considered.
(6) All GPIOs are configured as analog mode except standby mode.

Figure 4-2. Typical supply current consumption in Run mode


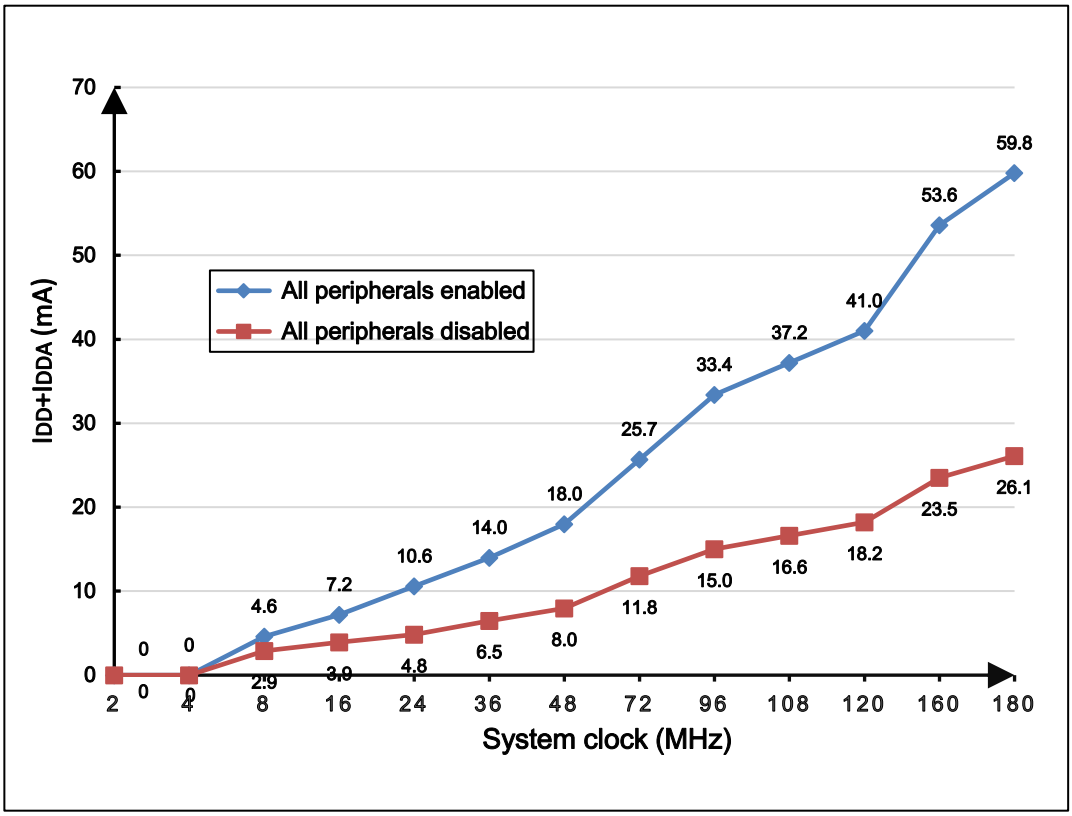


Figure 4-3. Typical supply current consumption in Sleep mode

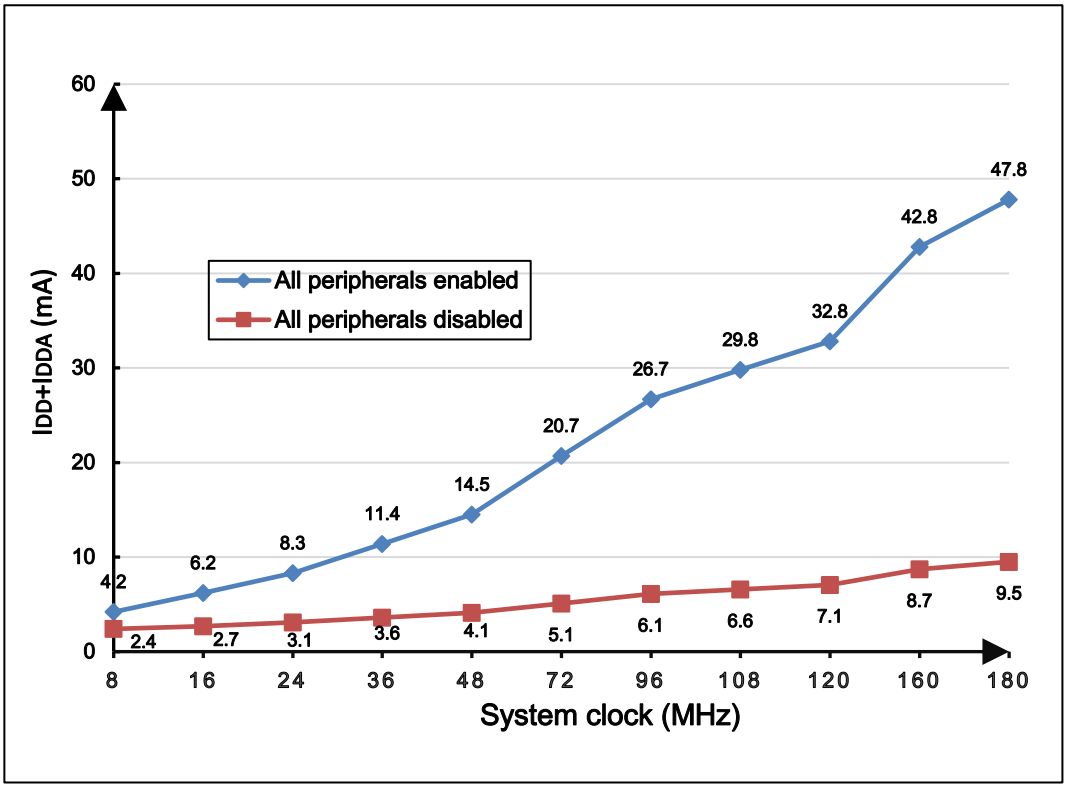

4.4. EMC characteristics

EMS (electromagnetic susceptibility) includes ESD (Electrostatic discharge, positive and negative) and FTB (Burst of Fast Transient voltage, positive and negative) testing result is given in *Table 4-8. EMS characteristics*(1), based on the EMS levels and classes compliant with IEC 61000 series standard.

Table 4-8. EMS characteristics(1)

Symbol	Parameter	Conditions	Level/Class
V_{ESD}	Contact / Air mode high voltage stressed on few special I/O pins	V_{DD} = 3.3 V, LQFP144, f_{HCLK} = 180 MHz conforms to IEC 61000-4-2	3A
V_{FTB}	Fast transient high voltage burst stressed on Power and GND	V_{DD} = 3.3 V, LQFP144, f_{HCLK} = 180 MHz conforms to IEC 61000-4-4	4A

(1) Based on characterization, not tested in production.

EMI (Electromagnetic Interference) emission test result is given in the *Table 4-9. EMI characteristics*(1), The electromagnetic field emitted by the device are monitored while an application, executing EEMBC code, is running. The test is compliant with SAE J1752-3:2017 standard which specifies the test board and the pin loading.

Table 4-9. EMI characteristics(1)

Symbol	Parameter	Conditions	Tested frequency band	Max vs. [f_{HXTAL}/f_{HCLK}] 8/180 MHz	Unit
S_{EMI}	Peak level	V_{DD} = 3.6 V, T_A = +23 °C, LQFP144, f_{HCLK} = 180 MHz, conforms to SAE J1752-3:2017	0.15 MHz to 30 MHz	-7.58	dBμV
			30 MHz to 130 MHz	3.35	
			130 MHz to 1 GHz	4.25	

(1) Based on characterization, not tested in production.

4.5. Power supply supervisor characteristics

Table 4-10. Power supply supervisor characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{LVD}(1)	Low voltage Detector level selection	LVDT<2:0> = 000(rising edge)	-	2.19	-	V
		LVDT<2:0> = 000(falling edge)	-	2.08	-	
		LVDT<2:0> = 001(rising edge)	-	2.33	-	
		LVDT<2:0> = 001(falling edge)	-	2.22	-	
		LVDT<2:0> = 010(rising edge)	-	2.48	-	

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
		LVDT<2:0> = 010(falling edge)	-	2.36	-	
		LVDT<2:0> = 011(rising edge)	-	2.62	-	
		LVDT<2:0> = 011(falling edge)	-	2.51	-	
		LVDT<2:0> = 100(rising edge)	-	2.75	-	
		LVDT<2:0> = 100(falling edge)	-	2.65	-	
		LVDT<2:0> = 101(rising edge)	-	2.9	-	
		LVDT<2:0> = 101(falling edge)	-	2.79	-	
		LVDT<2:0> = 110(rising edge)	-	3.04	-	
		LVDT<2:0> = 110(falling edge)	-	2.93	-	
		LVDT<2:0> = 111(rising edge)	-	3.19	-	
		LVDT<2:0> = 111(falling edge)	-	3.07	-	
$V_{LVDhyst}$(2)	LVD hysteresis	-	-	100	-	mV
V_{POR}(1)	Power on reset threshold	-	-	1.56	-	V
V_{PDR}(1)	Power down reset threshold	-	-	1.52	-	V
$V_{PDRhyst}$(2)	PDR hysteresis	-	-	40	-	mV
V_{BOR3}(2)	Brownout level 3 threshold	Falling edge	-	2.8	-	V
		Rising edge	-	2.9	-	V
V_{BOR2}(2)	Brownout level 2 threshold	Falling edge	-	2.5	-	V
		Rising edge	-	2.6	-	V
V_{BOR1}(2)	Brownout level 1 threshold	Falling edge	-	2.2	-	V
		Rising edge	-	2.3	-	V
$V_{BORhyst}$(2)	BOR hysteresis	-	-	100	-	mV
$t_{RSTTEMPO}$(2)	Reset temporization	-	-	2.88	-	ms

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

4.6. Electrical sensitivity

The device is strained in order to determine its performance in terms of electrical sensitivity. Electrostatic discharges (ESD) are applied directly to the pins of the sample. Static latch-up (LU) test is based on the two measurement methods.

Table 4-11. ESD characteristics(1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{ESD(HBM)}$	Electrostatic discharge voltage (human body model)	ESDA/JEDEC JS-001-2017	-	6000	-	V
$V_{ESD(CDM)}$	Electrostatic discharge voltage (charge device model)	ESDA/JEDEC JS-002-2018	-	1000	-	V

(1) Based on characterization, not tested in production.

Table 4-12. Static latch-up characteristics(1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
LU	I-test	JESD78E	-	200	-	mA
	V_{supply} over voltage		-	5.4	-	V

(1) Based on characterization, not tested in production.

4.7. External clock characteristics

Table 4-13. High speed external clock (HXTAL) generated from a crystal/ceramic characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{HXTAL}(1)	Crystal or ceramic frequency	1.71 V <= V_{DD} <= 3.63 V	4	8	32	MHz
R_F(2)	Feedback resistor	V_{DD} = 3.3 V	-	400	-	kΩ
C_{HXTAL}(2)(3)	Recommended load capacitance on OSCIN and OSCOUT	-	-	20	30	pF
$Ducy_{(HXTAL)}$(2)	Crystal or ceramic duty cycle	-	30	50	70	%
g_m(2)	Oscillator transconductance	Startup	-	25	-	mA/V
$I_{DDHXTAL}$(1)	Crystal or ceramic operating current	V_{DD} = 3.3 V, f_{HCLK} = f_{IRC8M} = 8 MHz	-	0.42	-	mA
$t_{SUHXTAL}$(1)	Crystal or ceramic startup time	V_{DD} = 3.3 V, f_{HCLK} = f_{IRC8M} = 8 MHz	-	2	-	ms

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

(3) C_{HXTAL1} = C_{HXTAL2} = 2*(C_{LOAD} - C_S), For C_{HXTAL1} and C_{HXTAL2}, it is recommended matching capacitance on OSCIN and OSCOUT. For C_{LOAD}, it is crystal/ceramic load capacitance, provided by the crystal or ceramic manufacturer. For C_S, it is PCB and MCU pin stray capacitance.

Table 4-14. High speed external clock characteristics (HXTAL in bypass mode)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{HXTAL_ext}(1)	External clock source or oscillator frequency	1.71 V <= V_{DD} <= 3.63 V	1	-	50	MHz
V_{HXTALH}(2)	OSCIN input pin high level voltage	V_{DD} = 3.3 V	0.7 V_{DD}	-	V_{DD}	V
V_{HXTALL}(2)	OSCIN input pin low level voltage		V_{SS}	-	0.3 V_{DD}	V

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$t_{H/L(HXTAL)}$(2)	OSCIN high or low time	-	5	-	-	ns
$t_{R/F(HXTAL)}$(2)	OSCIN rise or fall time	-	-	-	10	ns
C_{IN}(2)	OSCIN input capacitance	-	-	5	-	pF
$Ducy_{(HXTAL)}$(2)	Duty cycle	-	40	-	60	%

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

Table 4-15. Low speed external clock (LXTAL) generated from a crystal/ceramic characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{LXTAL}(1)	Crystal or ceramic frequency	V_{DD} = 3.3 V	-	32.768	-	kHz
C_{LXTAL}(2)(3)	Recommended matching capacitance on OSC32IN and OSC32OUT	-	-	10	-	pF
$Ducy_{(LXTAL)}$(2)	Crystal or ceramic duty cycle	-	30	-	70	%
g_m(2)	Oscillator transconductance	Lower driving capability	-	4	-	μA/V
		Medium low driving capability	-	6	-	
		Medium high driving capability	-	12	-	
		Higher driving capability	-	18	-	
$I_{DDLXTAL}$(1)	Crystal or ceramic operating current	LXTALDRI[1:0] = 00	-	0.7	-	μA
		LXTALDRI[1:0] = 01	-	0.8	-	
		LXTALDRI[1:0] = 10	-	1.2	-	
		LXTALDRI[1:0] = 11	-	1.6	-	
$t_{SULXTAL}$(1)(4)	Crystal or ceramic startup time	-	-	2	-	s

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

(3) $C_{LXTAL1} = C_{LXTAL2} = 2*(C_{LOAD} - C_S)$, For C_{LXTAL1} and C_{LXTAL2}, it is recommended matching capacitance on SC32IN and OSC32OUT. For C_{LOAD}, it is crystal/ceramic load capacitance, provided by the crystal or ceramic manufacturer. For C_S, it is PCB and MCU pin stray capacitance.

(4) $t_{SULXTAL}$ is the startup time measured from the moment it is enabled (by software) to the 32.768 kHz oscillator stabilization flags is SET. This value varies significantly with the crystal manufacturer.

Table 4-16. Low speed external user clock characteristics (LXTAL in bypass mode)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{LXTAL_ext}(1)	External clock source or oscillator frequency	V_{DD} = 3.3 V	-	32.768	1000	kHz
V_{LXTALH}(2)	OSC32IN input pin high level voltage	-	0.7 V_{DD}	-	V_{DD}	V
V_{LXTALL}(2)	OSC32IN input pin low level voltage	-	V_{SS}	-	0.3 V_{DD}	
$t_{H/L(LXTAL)}$(2)	OSC32IN high or low time	-	450	-	-	ns
$t_{R/F(LXTAL)}$(2)	OSC32IN rise or fall time	-	-	-	50	
C_{IN}(2)	OSC32IN input capacitance	-	-	5	-	pF
$Ducy_{(LXTAL)}$(2)	Duty cycle	-	30	50	70	%

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

4.8. Internal clock characteristics

Table 4-17. High speed internal clock (IRC8M) characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{IRC8M}	High Speed Internal Oscillator (IRC8M) frequency	V_{DD} = V_{DDA} = 3.3 V	-	8	-	MHz
ACC_{IRC8M}	IRC8M oscillator Frequency accuracy, Factory-trimmed	V_{DD} = V_{DDA} = 3.3 V, T_A = -40 °C ~ +85 °C for grade 6 devices	-	-0.862 to 0.887(1)	-	%
		V_{DD} = V_{DDA} = 3.3 V, T_A = -40 °C ~ +105 °C for grade 7 devices	-	-1.55 to 0.887(1)	-	%
		V_{DD} = V_{DDA} = 3.3 V, T_A = 25 °C	-1.0	-	+1.0	%
	IRC8M oscillator Frequency accuracy, User trimming step(1)	-	-	0.5	-	%
$Ducy_{IRC8M}$(2)	IRC8M oscillator duty cycle	V_{DD} = V_{DDA} = 3.3 V	45	50	55	%
$I_{DDAIRC8M}$(1)	IRC8M oscillator operating current	V_{DD} = V_{DDA} = 3.3 V	-	80	-	μA
$t_{SUIRC8M}$(1)	IRC8M oscillator startup time	V_{DD} = V_{DDA} = 3.3 V	-	1.5	-	μs

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

Table 4-18. Low speed internal clock (IRC40K) characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{IRC40K}(1)	Low Speed Internal oscillator (IRC40K) frequency	V_{DD} = V_{DDA} = 3.3 V，for grade 6 devices	20	40	45	kHz
		V_{DD} = V_{DDA} = 3.3 V，for grade 7 devices	30	40	45	kHz
$I_{DDAIRC40K}$(2)	IRC40K oscillator operating current	V_{DD} = V_{DDA} = 3.3 V, f_{HCLK} = f_{HXTAL_PLL} = 180 MHz	-	0.4	-	μA
$t_{SUIRC40K}$(2)	IRC40K oscillator startup time	V_{DD} = V_{DDA} = 3.3 V, f_{HCLK} = f_{HXTAL_PLL} = 180 MHz	-	80	-	μs

(1) Guaranteed by design, not tested in production.

(2) Based on characterization, not tested in production.

Table 4-19. High speed internal clock (IRC48M) characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{IRC48M}	High Speed Internal Oscillator (IRC48M) frequency	V_{DD} = 3.3 V	-	48	-	MHz
ACC_{IRC48M}	IRC48M oscillator Frequency accuracy, Factory-trimmed	V_{DD} = V_{DDA} = 3.3 V, T_A = -40 °C ~+85 °C for grade 6 devices	-	-2.013 to 1.023(1)	-	%
		V_{DD} = V_{DDA} = 3.3 V, T_A = -40 °C ~ +105 °C for grade 7 devices	-	-2.871 to 1.023(1)	-	%
		V_{DD} = V_{DDA} = 3.3 V	-2.0	-	+2.0	%
	IRC48M oscillator Frequency accuracy, User trimming step(1)	-	-	0.12	-	%
D_{IRC48M}(2)	IRC48M oscillator duty cycle	V_{DD} = V_{DDA} = 3.3 V	45	50	55	%
$I_{DDAIRC48M}$(1)	IRC48M oscillator operating current	V_{DD} = V_{DDA} = 3.3 V, f_{HCLK} = f_{HXTAL_PLL} = 180 MHz	-	286.9	-	μA
$t_{SUIRC48M}$(1)	IRC48M oscillator startup time	V_{DD} = V_{DDA} = 3.3 V, f_{HCLK} = f_{HXTAL_PLL} = 180 MHz	-	3.68	-	μs

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

4.9. PLL characteristics

Table 4-20. PLL characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{PLLIN}(1)	PLL input clock frequency	-	2	-	16	MHz
f_{PLLOUT}(2)	PLL output clock frequency	-	16	-	180	MHz
f_{VCO}(2)	PLL VCO output clock frequency	-	32	-	360	MHz
t_{LOCK}(2)	PLL lock time	-	-	-	300	μs
I_{DDA}(1)(3)	Current consumption on V_{DDA}	VCO freq = 360 MHz	-	700	-	μA
I_{DD}(1)(3)	Current consumption on V_{DD}	VCO freq = 360 MHz	-	500	-	μA
$Jitter_{PLL}$(1)(4)	Cycle to cycle Jitter (rms)	System clock	-	40	-	ps
	Cycle to cycle Jitter (peak to peak)		-	400	-	

(1) Based on characterization, not tested in production.
(2) Guaranteed by design, not tested in production.
(3) System clock = IRC8M = 8 MHz, PLL clock source = IRC8M/2 = 4 MHz, f_{PLLOUT} = 180 MHz.
(4) Value given with main PLL running.

Table 4-21. PLL spread spectrum clock generation (SSCG) characteristics(1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{mod}	Modulation frequency	-	-	-	10	KHz
mdamp	Peak modulation amplitude	-	-	-	2	%
MODCNT* MODSTEP	-	-	-	-	2^{15}-1	-

(1) Guaranteed by design, not tested in production.

Equation 1: SSCG configuration equation:

$MODCNT=round(f_{PLLIN}/4/f_{mod})$

$MODSTEP = round(mdamp*PLLN*2^{15}/(MODCNT*100))$

The formula above (***Equation 1***) is SSCG configuration equation.

4.10. Memory characteristics

Table 4-22. Flash memory characteristics(1)

Symbol	Parameter	Conditions	Min(1)	Typ(1)	Max	Unit
PE_{CYC}	Number of guaranteed program /erase cycles before failure (Endurance)	T_A range(2)	100	-	-	kcycles
t_{RET}	Data retention time	T_A = 85 °C after up to 0 kcycle(3)	25	-	-	years
		T_A = 105 °C after up to 0 kcycle(3)	4	-	-	
		T_A = 85 °C after up to 10 kcycles(3)	15	-	-	
t_{PROG}	Word programming time	T_A range(2)	-	37.5	-	μs
t_{ERASE}	Page erase time		-	11	-	ms
t_{MERASE}	Mass erase time		-	12	-	s

(1) Based on characterization, not tested in production.

(2) For grade 6 devices, T_A range= -40°C ~ +85°C. For grade 7 devices, T_A range= -40°C ~ +105°C.

(3) Cycling performed over the whole temperature range.

4.11. NRST pin characteristics


Table 4-23. NRST pin characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{IL(NRST)}$(1)	NRST Input low level voltage	V_{DD} = V_{DDA} = 1.71 V	-	-	0.35 V_{DD}	V
$V_{IH(NRST)}$(1)	NRST Input high level voltage		0.65 V_{DD}	-	-	
V_{hyst}(1)	Schmidt trigger Voltage hysteresis		-	120	-	mV
$V_{IL(NRST)}$(1)	NRST Input low level voltage	V_{DD} = V_{DDA} = 3.3 V	-	-	0.35 V_{DD}	V
$V_{IH(NRST)}$(1)	NRST Input high level voltage		0.65 V_{DD}	-	-	
V_{hyst}(1)	Schmidt trigger Voltage hysteresis		-	180	-	mV
$V_{IL(NRST)}$(1)	NRST Input low level voltage	V_{DD} = V_{DDA} = 3.63 V	-	-	0.35 V_{DD}	V
$V_{IH(NRST)}$(1)	NRST Input high level voltage		0.65 V_{DD}	-	-	
V_{hyst}(1)	Schmidt trigger Voltage hysteresis		-	200	-	mV
R_{pu}(2)	Pull-up equivalent resistor	-	-	40	-	kΩ

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

Figure 4-4. Recommended external NRST pin circuit(1)

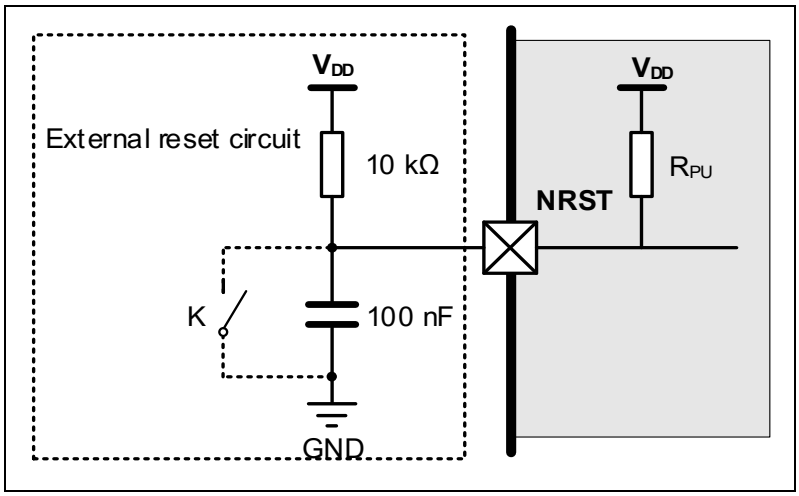

(1) Unless the voltage on NRST pin go below $V_{IL(NRST)}$ level, the device would not generate a reliable reset.

4.12. GPIO characteristics

Table 4-24. I/O port DC characteristics(1)(3)

Symbol	Parameter		Conditions	Min	Typ	Max	Unit
V_{IL}	Standard IO Low level input voltage		1.71 V <= V_{DD} = V_{DDA} <= 3.63 V	-	-	0.35 V_{DD}	V
	5V-tolerant IO Low level input voltage		1.71 V <= V_{DD} = V_{DDA} <= 3.63 V	-	-	0.35 V_{DD}	V
V_{IH}	Standard IO Low level input voltage		1.71 V <= V_{DD} = V_{DDA} <= 3.63 V	0.65 V_{DD}	-	-	V
	5V-tolerant IO Low level input voltage		1.71 V <= V_{DD} = V_{DDA} <= 3.63 V	0.65 V_{DD}	-	-	V
V_{OL}	Low level output voltage for an IO Pin (I_{IO} = +8 mA)		V_{DD} = 1.71V	-	-	0.19	V
			V_{DD} = 3.3 V	-	-	0.12	
			V_{DD} = 3.63V	-	-	0.11	
V_{OL}	Low level output voltage for an IO Pin (I_{IO} = +20 mA)		V_{DD} = 1.71V	-	-	0.61	V
			V_{DD} = 3.3 V	-	-	0.3	
			V_{DD} = 3.63V	-	-	0.29	
V_{OH}	High level output voltage for an IO Pin (I_{IO} = +8 mA)		V_{DD} = 1.71V	1.48	-	-	V
			V_{DD} = 3.3 V	3.17	-	-	
			V_{DD} = 3.63V	3.47	-	-	
V_{OH}	High level output voltage for an IO Pin (I_{IO} = +20 mA)		V_{DD} = 1.71V	-	-	-	V
			V_{DD} = 3.3 V	2.96	-	-	
			V_{DD} = 3.63V	3.26	-	-	
R_{PU}(2)	Internal pull-up resistor	All pins	-	-	40	-	kΩ
		PA10	-	-	10	-	
R_{PD}(2)	Internal pull-down resistor	All pins	-	-	40	-	kΩ
		PA10	-	-	10	-	


(1) Based on characterization, not tested in production.
(2) Guaranteed by design, not tested in production.
(3) All pins except PC13 / PC14 / PC15. Since PC13 to PC15 are supplied through the Power Switch, which can only be obtained by a small current(typical source capability:3 mA shared between these IOs, but sink capability is same as other IO), the speed of GPIOs PC13 to PC15 should not exceed 2 MHz when they are in output mode(maximum load: 30 pF).

Table 4-25. I/O port AC characteristics(1)(2)

GPIOx_MDy[1:0] bit value(3)	Parameter	Conditions	Max	Unit
GPIOx_CTL->MDy[1:0]=10 (IO_Speed = 2MHz)	Maximum frequency(4)	1.8 <= V_{DD} <= 3.63 V, C_L = 10 pF	4	MHz
		1.8 <= V_{DD} <= 3.63 V, C_L = 30 pF	3	
		1.8 <= V_{DD} <= 3.63 V, C_L = 50 pF	2	
GPIOx_CTL->MDy[1:0] = 01 (IO_Speed = 10MHz)	Maximum frequency(4)	1.8 <= V_{DD} <= 3.63 V, C_L = 10 pF	60	MHz
		1.8 <= V_{DD} <= 3.63 V, C_L = 30 pF	30	
		1.8 <= V_{DD} <= 3.63 V, C_L = 50 pF	12	
GPIOx_CTL->MDy[1:0]=11 (IO_Speed = 50MHz)	Maximum frequency(4)	1.8 <= V_{DD} <= 3.63 V, C_L = 10 pF	100	MHz
		1.8 <= V_{DD} <= 3.63 V, C_L = 30 pF	80	
		1.8 <= V_{DD} <= 3.63 V, C_L = 50 pF	60	
GPIOx_CTL->MDy[1:0]=11 and GPIOx_SPDy=1 (IO_Speed = MAX)	Maximum frequency(4)	1.8 <= V_{DD} <= 3.63 V, C_L = 10 pF	120	MHz
		1.8 <= V_{DD} <= 3.63 V, C_L = 30 pF	100	
		1.8 <= V_{DD} <= 3.63 V, C_L = 50 pF	80	

(1) Based on characterization, not tested in production.
(2) Unless otherwise specified, all test results given for T_A = 25 ℃.
(3) The I/O speed is configured using the GPIOx_CTL -> MDy[1:0] bits. Refer to the GD32E50x user manual which is selected to set the GPIO port output speed.
(4) The maximum frequency is defined in *Figure 4-5. I/O port AC characteristics definition*, and maximum frequency cannot exceed 180 MHz.

Figure 4-5. I/O port AC characteristics definition

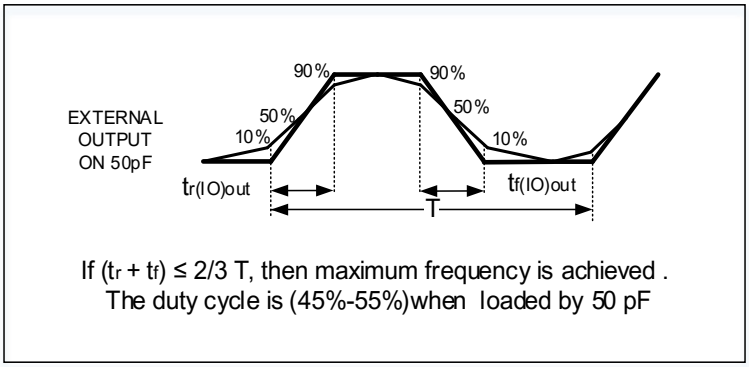

4.13. Temperature sensor characteristics

Table 4-26. Temperature sensor characteristics(1)

Symbol	Parameter	Min	Typ	Max	Unit
V_{DD}	Supply voltage	1.8	-	3.63	V
V_{DDA}	Analog supply voltage	1.8	-	3.63	
V_{REFP}	Positive Reference Voltage	1.8	-	V_{DDA}	

V_{REFN}	Negative Reference Voltage	-	V_{SSA}	-	
T_L	VSENSE linearity with temperature	-	+/-1.5	-	℃
Avg_Slope	Average slope	-	4.1	-	mV/℃
V_{25}	Voltage at 25 ℃	-	1.45	-	V
t_{S_temp}(2)	ADC sampling time when reading the temperature	-	17.1	-	μs

(1) Based on characterization, not tested in production.

(2) Shortest sampling time can be determined in the application by multiple iterations.

4.14. ADC characteristics

Table 4-27. ADC characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{DDA}(1)	Operating voltage	-	1.71	3.3	3.63	V
V_{IN}(1)	ADC input voltage range	-	0	-	V_{REFP}	V
V_{REFINT}	Internal Reference Voltage	T_J=-40℃~105℃	1.1	1.2	1.3	V
V_{REFP}(2)(3)	Positive Reference Voltage	-	1.71	-	V_{DDA}	V
V_{REFN}(2)	Negative Reference Voltage	-	-	V_{SSA}	-	V
f_{ADC}(1)	ADC clock	V_{DDA} = 1.71 V to 2.4 V	0.1	-	14	MHz
		V_{DDA} = 2.4 V to 3.63 V	0.1	-	35	MHz
f_S(1)	Sampling rate	12-bit	0.007	-	2.5	MSPS
		10-bit	0.008	-	2.92	
		8-bit	0.01	-	3.5	
		6-bit	0.013	-	4.38	
V_{AIN}(1)	Analog input voltage	16 external; 2 internal	0	-	V_{DDA}	V
R_{AIN}(2)	External input impedance	See ***Equation 2***	-	-	175.8	kΩ
R_{ADC}(2)	Input sampling switch resistance	-	-	-	0.5	kΩ
C_{ADC}(2)	Input sampling capacitance	No pin/pad capacitance included	-	-	4	pF
t_{CAL}(2)	Calibration time	f_{ADC} = 35 MHz	-	15.94	-	μs
t_s(2)	Sampling time	f_{ADC} = 35 MHz	0.043	-	6.84	μs
t_{CONV}(2)	Total conversion time(including sampling time)	12-bit	-	14	-	1 / f_{ADC}
		10-bit	-	12	-	
		8-bit	-	10	-	
		6-bit	-	8	-	
t_{SU}(2)	Startup time	-	-	-	1	μs

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

(3) V_{REFP} should always be equal to or less than V_{DDA}, especially during power up.

Equation 2:

R_{AIN} max formula $R_{AIN} < \frac{T_s}{f_{ADC} * C_{ADC} * \ln(2^{N+2})} - R_{ADC}$

The formula above (Equation 2) is used to determine the maximum external impedance allowed for an error below 1/4 of LSB. Here N = 12 (from 12-bit resolution).

Table 4-28. ADC R_{AIN} max for f_{ADC} = 35 MHz

T_s (cycles)	t_s (μs)	$R_{AIN\ max}$ (kΩ)
1.5	0.043	0.6
7.5	0.21	5.0
13.5	0.39	9.4
28.5	0.81	20.5
41.5	1.19	30.0
55.5	1.59	40.0
71.5	2.04	52.0
239.5	6.84	175.8

Table 4-29. ADC dynamic accuracy at f_{ADC} = 14 MHz V_{DDA} = 1.8 V(1)

Symbol	Parameter	Test conditions		Min	Typ	Max	Unit
ENOB	Effective number of bits	f_{ADC} = 14 MHz V_{DDA} = V_{REFP} = 1.8 V Input Frequency = 20 kHz	Single ended	10.4	10.8	-	bits
			Differential	10.9	11.3	-	
SNDR	Signal-to-noise and distortion ratio		Single ended	64.4	66.8	-	dB
			Differential	67.5	69.9	-	
SNR	Signal-to-noise ratio		Single ended	64.5	66.9	-	
			Differential	67.6	70.2	-	
THD	Total harmonic distortion		Single ended	-	-81	-78	
			Differential	-	-82	-79	

(1) Based on characterization, not tested in production.

Table 4-30. ADC dynamic accuracy at f_{ADC} = 35 MHz V_{DDA} = 3.3 V(1)

Symbol	Parameter	Test conditions		Min	Typ	Max	Unit
ENOB	Effective number of bits	f_{ADC} = 35 MHz V_{DDA} = V_{REFP} =3.3 V Input Frequency = 20 kHz	Single ended	10.7	11.1	-	bits
			Differential	11	11.4	-	
SNDR	Signal-to-noise and distortion ratio		Single ended	66.2	68.6	-	dB
			Differential	68.2	70.6	-	
SNR	Signal-to-noise ratio		Single ended	66	68.8	-	
			Differential	68	71	-	
THD	Total harmonic distortion		Single ended	-	-82	-78	
			Differential	-	-83	-79	

(1) Based on characterization, not tested in production.

Table 4-31. ADC dynamic accuracy at f_{ADC} = 35 MHz V_{DDA} = 2.4 V(1)

Symbol	Parameter	Test conditions		Min	Typ	Max	Unit
ENOB	Effective number of bits	f_{ADC} = 35 MHz V_{DDA} = V_{REFP} =2.4 V Input Frequency = 20 kHz	Single ended	10.6	11	-	bits
			Differential	11	11.4	-	
SNDR	Signal-to-noise and distortion ratio		Single ended	66	68.3	-	dB
			Differential	68	70.4	-	
SNR	Signal-to-noise ratio		Single ended	65	68.5	-	

Symbol	Parameter	Test conditions		Min	Typ	Max	Unit
			Differential	67	70.8	-	
THD	Total harmonic distortion		Single ended	-	-82	-78	
			Differential	-	-83	-79	

(1) Based on characterization, not tested in production.

Table 4-32. ADC static accuracy at f_{ADC} = 14 MHz V_{DDA} = 1.8 V(1)

Symbol	Parameter	Test conditions		Typ	Max	Unit
Offset	Offset error	f_{ADC} = 14 MHz V_{DDA} = V_{REFP} = 1.8 V	Single ended	+/-0.5	+/-1	LSB
			Differential	+/-0.5	+/-1	
DNL	Differential linearity error		Single ended	+/-0.5	+/-1	
			Differential	+/-0.6	+/-1	
INL	Integral linearity error		Single ended	+/-0.6	+/-1	
			Differential	+/-0.8	+/-1.5	

(1) Based on characterization, not tested in production.

Table 4-33. ADC static accuracy at f_{ADC} = 35 MHz V_{DDA} = 3.3 V(1)

Symbol	Parameter	Test conditions		Typ	Max	Unit
Offset	Offset error	f_{ADC} = 35 MHz V_{DDA} = V_{REFP} = 3.3 V	Single ended	+/-0.5	+/-1	LSB
			Differential	+/-0.5	+/-1	
DNL	Differential linearity error		Single ended	+/-0.5	+/-0.8	
			Differential	+/-0.7	+/-1	
INL	Integral linearity error		Single ended	+/-0.7	+/-1	
			Differential	+/-0.9	+/-1.5	

(1) Based on characterization, not tested in production.

Table 4-34. ADC static accuracy at f_{ADC} = 35 MHz V_{DDA} = 2.4 V(1)

Symbol	Parameter	Test conditions		Typ	Max	Unit
Offset	Offset error	f_{ADC} = 35 MHz V_{DDA} = V_{REFP} = 2.4 V	Single ended	+/-0.5	+/-1	LSB
			Differential	+/-0.5	+/-1	
DNL	Differential linearity error		Single ended	+/-0.5	+/-0.8	
			Differential	+/-0.6	+/-1	
INL	Integral linearity error		Single ended	+/-0.6	+/-1	
			Differential	+/-0.8	+/-1.5	

(1) Based on characterization, not tested in production.

4.15. DAC characteristics

Table 4-35. DAC characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{DDA}(1)	Operating voltage	-	1.8	3.3	3.63	V
V_{REFP}(2)	Positive Reference Voltage	-	1.8	-	V_{DDA}	V
V_{REFN}(2)	Negative Reference Voltage	-	-	V_{SSA}	-	V
R_{LOAD}(2)	Load resistance	Resistive load with buffer ON	5	-	-	kΩ
Ro(2)	Impedance output with buffer OFF	-	-	-	15	kΩ
C_{LOAD}(2)	Load capacitance	No pin/pad capacitance included	-	-	50	pF
DAC_OUT min(2)	Lower DAC_OUT voltage with buffer ON	-	0.2	-	-	V
DAC_OUT max(2)	Higher DAC_OUT voltage with buffer ON	-	-	-	VDDA -0.2	V
DAC_OUT min(2)	Lower DAC_OUT voltage with buffer OFF	-	-	0.5	-	mV
DAC_OUT max(2)	Higher DAC_OUT voltage with buffer OFF	-	-	-	VREF -1LSB	V
I_{DDA}(1)	DAC current consumption in quiescent mode	With no load, middle code(0x800) on the input, V_{REF+} = 3.63 V	-	400	-	uA
		With no load, worst code(0xF1C) on the input, V_{REF+} = 3.63 V	-	450	-	uA
$I_{DDVREF+}$(1)	DAC current consumption in quiescent mode	With no load, middle code(0x800) on the input, V_{REF+} = 3.63 V	-	100	-	uA
		With no load, worst code(0xF1C) on the input, V_{REF+} = 3.63 V	-	150	-	uA
DNL(1)	Differential non-linearity error	DAC in 12-bit mode	-	-	+/-2	LSB
INL(1)	Integral non-linearity	DAC in 12-bit mode	-	-	+/-4	LSB
Offset(1)	Offset error	DAC in 12-bit mode	-	-	10	LSB
GE(1)	Gain error	DAC in 12-bit mode	-	-	0.5	%
$T_{setting}$(1)	Settling time	C_{LOAD} <= 50 pF, R_{LOAD} >= 5 kΩ	-	-	0.5	μs
T_{wakeup}(2)	Wakeup from off state	-	-	-	5	μs
Update rate(2)	Max frequency for a correct DAC_OUT change from code i to i+/-1LSBs	C_{LOAD} <= 50 pF, R_{LOAD} >= 5 kΩ	-	-	4	MS/s
PSRR(2)	Power supply rejection ratio	-	55	80	-	dB

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
	(to V_{DDA})					

(1) Based on characterization, not tested in production.

(2) Guaranteed by design, not tested in production.

4.16. I2C characteristics

Table 4-36. I2C characteristics(1)(2)

Symbol	Parameter	Conditions	Standard mode		Fast mode		Fast mode plus		Unit
			Min	Max	Min	Max	Min	Max	
$t_{SCL(H)}$	SCL clock high time	-	4.0	-	0.6	-	0.2	-	μs
$t_{SCL(L)}$	SCL clock low time	-	4.7	-	1.3	-	0.5	-	μs
$t_{su(SDA)}$	SDA setup time	-	250	-	100		50	-	ns
$t_{h(SDA)}$	SDA data hold time	-	0(3)	3450	0	900	0	450	ns
$t_{r(SDA/SCL)}$	SDA and SCL rise time	-	-	1000	-	300	-	120	ns
$t_{f(SDA/SCL)}$	SDA and SCL fall time	-	-	300	-	300	-	120	ns
$t_{h(STA)}$	Start condition hold time	-	4.0	-	0.6	-	0.26	-	μs

(1) Guaranteed by design, not tested in production.

(2) To ensure the standard mode I2C frequency, f_{PCLK1} must be at least 2 MHz.To ensure the fast mode I2C frequency, f_{PCLK1} must be at least 4 MHz. To ensure the fast mode plus I2C frequency, f_{PCLK1} must be at least a multiple of 10 MHz.

(3) The device should provide a data hold time of 300 ns at least in order to bridge the undefined region of the falling edge of SCL.

Figure 4-6. I2C bus timing diagram

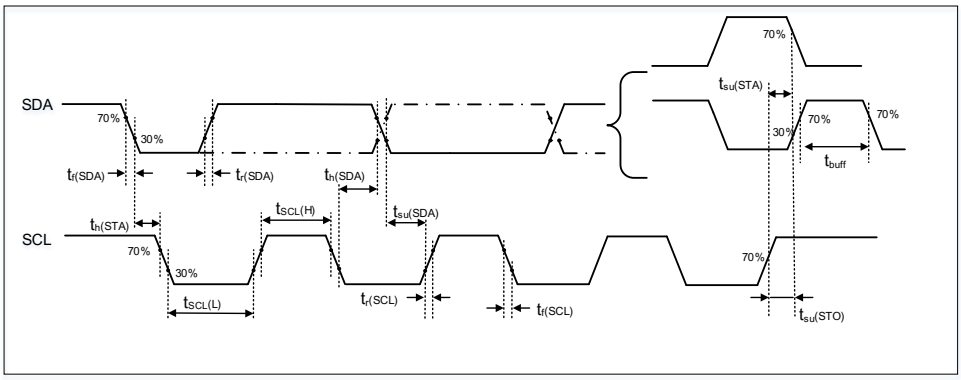


Table 4-37. I2C analog filter delay characteristics(1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t_{AF}	Analog filter delay time	-	50	75	160	ns

(1) Guaranteed by design, not tested in production.

4.17. SPI characteristics

Table 4-38. Standard SPI characteristics(1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{SCK}	SCK clock frequency	-	-	-	22.5	MHz
$t_{SCK(H)}$	SCK clock high time	Master mode, f_{PCLKx} = 90 MHz, presc = 4	-	22.2	-	ns
$t_{SCK(L)}$	SCK clock low time	Master mode, f_{PCLKx} = 90 MHz, presc = 4	-	22.2	-	ns
SPI master mode						
$t_{V(MO)}$	Data output valid time	-	-	-	10	ns
$t_{SU(MI)}$	Data input setup time	-	1	-	-	ns
$t_{H(MI)}$	Data input hold time	-	0	-	-	ns
SPI slave mode						
$t_{SU(NSS)}$	NSS enable setup time	-	0	-	-	ns
$t_{H(NSS)}$	NSS enable hold time	-	1	-	-	ns
$t_{A(SO)}$	Data output access time	-	-	10	-	ns
$t_{DIS(SO)}$	Data output disable time	-	-	11	-	ns
$t_{V(SO)}$	Data output valid time	-	-	11	-	ns
$t_{SU(SI)}$	Data input setup time	-	0	-	-	ns
$t_{H(SI)}$	Data input hold time	-	1	-	-	ns

(1) Based on characterization, not tested in production.

Figure 4-7. SPI timing diagram - master mode


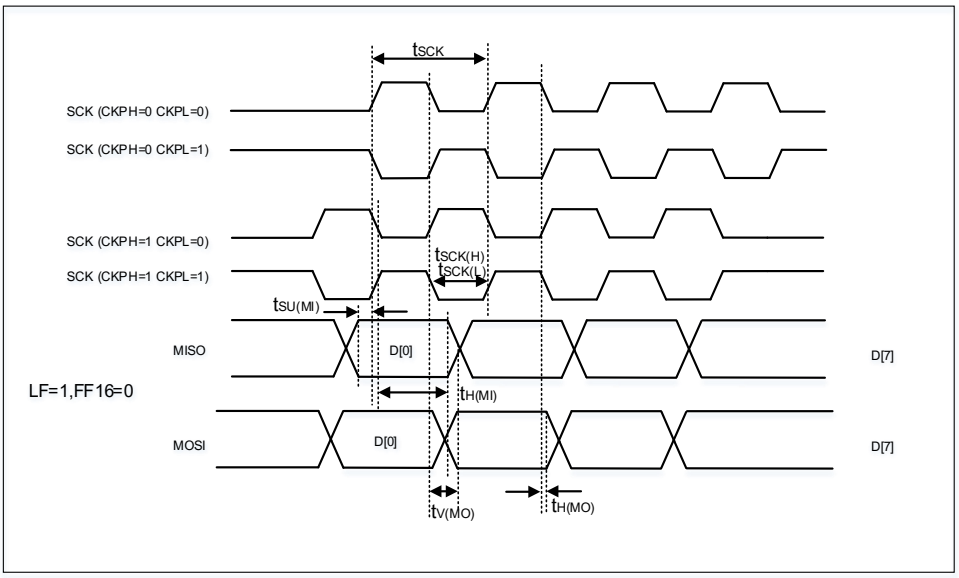


Figure 4-8. SPI timing diagram - slave mode

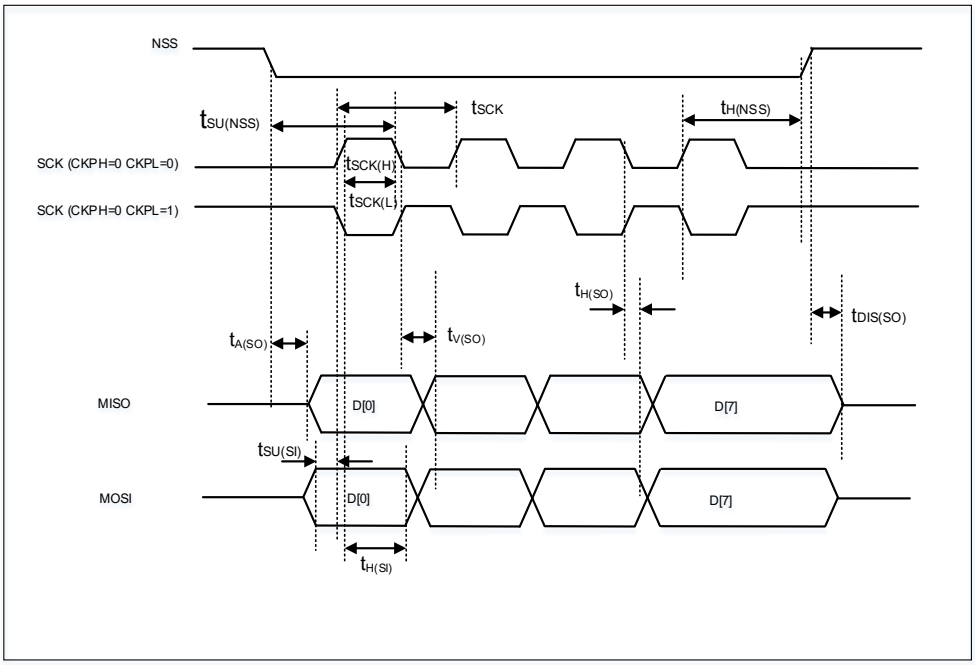

4.18. I2S characteristics

Table 4-39. I2S characteristics(1)(2)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{CK}	Clock frequency	Master mode (data: 32 bits, Audio frequency = 96 kHz)	-	6.21	-	MHz
		Slave mode	-	-	12.5	
t_H	Clock high time	-	-	81	-	ns
t_L	Clock low time		-	81	-	ns
$t_{V(WS)}$	WS valid time	Master mode	-	3	-	ns
$t_{H(WS)}$	WS hold time	Master mode	-	3	-	ns
$t_{SU(WS)}$	WS setup time	Slave mode	0	-	-	ns
$t_{H(WS)}$	WS hold time	Slave mode	2	-	-	ns
$Ducy_{(SCK)}$	I2S slave input clock duty cycle	Slave mode	-	50	-	%
$t_{SU(SD_MR)}$	Data input setup time	Master mode	1	-	-	ns
$t_{SU(SD_SR)}$	Data input setup time	Slave mode	0	-	-	ns
$t_{H(SD_MR)}$	Data input hold time	Master receiver	0	-	-	ns
$t_{H(SD_SR)}$		Slave receiver	1	-	-	ns
$t_{V(SD_ST)}$	Data output valid time	Slave transmitter (after enable edge)	-	-	10	ns
$t_{H(SD_ST)}$	Data output hold time	Slave transmitter (after enable edge)	3	-	-	ns
$t_{V(SD_MT)}$	Data output valid time	Master transmitter (after enable edge)	-	-	10	ns
$t_{H(SD_MT)}$	Data output hold time	Master transmitter (after enable edge)	0	-	-	ns

(1) Guaranteed by design, not tested in production.

(2) Based on characterization, not tested in production

Figure 4-9. I2S timing diagram - master mode


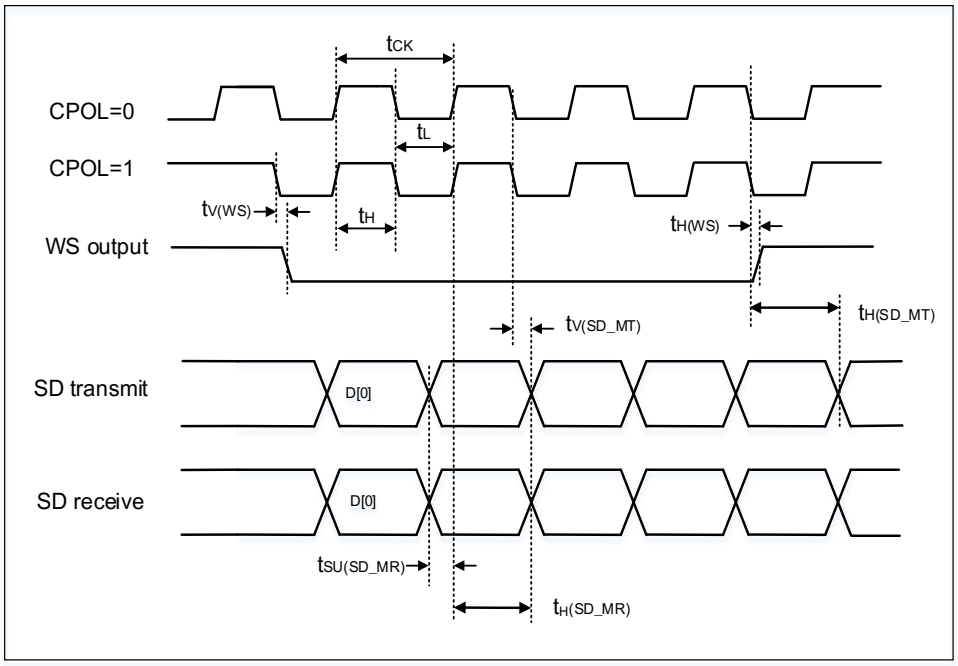


Figure 4-10. I2S timing diagram - slave mode

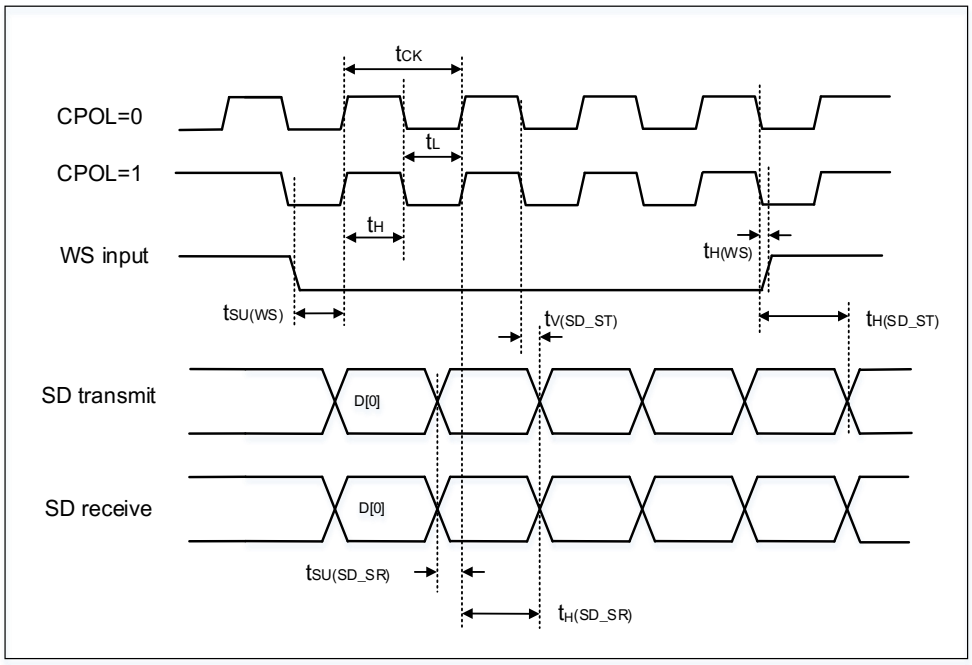

4.19. USART characteristics

Table 4-40. USART characteristics(1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{SCK}	SCK clock frequency	f_{PCLKx} = 180 MHz	-	-	90	MHz
$t_{SCK(H)}$	SCK clock high time	f_{PCLKx} = 180 MHz	5	-	-	ns
$t_{SCK(L)}$	SCK clock low time	f_{PCLKx} = 180 MHz	5	-	-	ns

(1) Guaranteed by design, not tested in production.

4.20. USBD characteristics

Table 4-41. USBD start up time

Symbol	Parameter	Max	Unit
$t_{STARTUP}$(1)	USBD startup time	1	μs

(1) Guaranteed by design, not tested in production.

Table 4-42. USBD DC electrical characteristics

Symbol		Parameter	Conditions	Min	Typ	Max	Unit
Input levels(1)	V_{DD}	USBFS operating voltage	-	3	-	3.63	V
	V_{DI}	Differential input sensitivity	-	0.2	-	-	
	V_{CM}	Differential common mode range	Includes V_{DI} range	0.8	-	2.5	
	V_{SE}	Single ended receiver threshold	-	0.8	-	2.0	
Output levels (2)	V_{OL}	Static output level low	R_L of 1.0 kΩ to 3.63 V	-	-	0.3	V
	V_{OH}	Static output level high	R_L of 15 kΩ to V_{SS}	2.8	3.3	3.63	

(1) Guaranteed by design, not tested in production.


(2) Based on characterization, not tested in production.

Table 4-43. USBD full speed-electrical characteristics(1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t_R	Rise time	CL = 50 pF	4	5	20	ns
t_F	Fall time	CL = 50 pF	4	5	20	ns
t_{RFM}	Rise/ fall time matching	t_R / t_F	90	-	110	%
v_{CRS}	Output signal crossover voltage	-	1.3	-	2.0	V

(1) Guaranteed by design, not tested in production.

Figure 4-11. USBD timings: definition of data signal rise and fall time

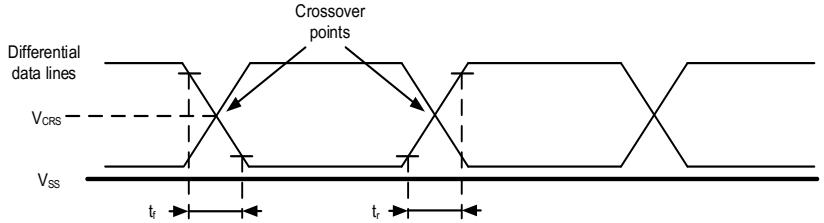

4.21. SDIO characteristics

Table 4-44. SDIO characteristics(1)(2)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{PP}(3)	Clock frequency in data transfer mode	-	0	-	48	MHz
$t_{W(CKL)}$ (3)	Clock low time	f_{pp} = 48 MHz	10.5	11	-	ns
$t_{W(CKH)}$ (3)	Clock high time	f_{pp} = 48 MHz	9.5	10	-	ns
CMD, D inputs (referenced to CK) in MMC and SD HS mode						
t_{ISU}(4)	Input setup time HS	f_{pp} = 48 MHz	4	-	-	ns
t_{IH}(4)	Input hold time HS	f_{pp} = 48 MHz	3	-	-	ns
CMD, D outputs (referenced to CK) in MMC and SD HS mode						
t_{OV}(3)	Output valid time HS	f_{pp} = 48 MHz	-	-	13.8	ns
t_{OH}(3)	Output hold time HS	f_{pp} = 48 MHz	12	-	-	ns
CMD, D inputs (referenced to CK) in SD default mode						
t_{ISUD}(4)	Input setup time SD	f_{pp} = 24 MHz	3	-	-	ns
t_{IHD}(4)	Input hold time SD	f_{pp} = 24 MHz	3	-	-	ns
CMD, D outputs (referenced to CK) in SD default mode						
t_{OVD}(3)	Output valid default time SD	f_{pp} = 24 MHz	-	2.4	2.8	ns
t_{OHD}(3)	Output hold default time SD	f_{pp} = 24 MHz	0.8	-	-	ns

(1) CLK timing is measured at 50% of V_{DD}.
(2) Capacitive load C_L = 30 pF.
(3) Based on characterization, not tested in production.
(4) Guaranteed by design, not tested in production

4.22. EXMC characteristics

Table 4-45. Asynchronous non-multiplexed SRAM/PSRAM/NOR read timings(1)(2)(3)

Symbol	Parameter	Min	Max	Unit
$t_{w(NE)}$	EXMC_NE low time	27	29	ns
$t_{V(NOE_NE)}$	EXMC_NEx low to EXMC_NOE low	0	-	ns
$t_{w(NOE)}$	EXMC_NOE low time	27	29	ns
$t_{h(NE_NOE)}$	EXMC_NOE high to EXMC_NE high hold time	0	-	ns
$t_{v(A_NE)}$	EXMC_NEx low to EXMC_A valid	0	-	ns
$t_{v(BL_NE)}$	EXMC_NEx low to EXMC_BL valid	0	-	ns
$t_{su(DATA_NE)}$	Data to EXMC_NEx high setup time	21.4	-	ns
$t_{su(DATA_NOE)}$	Data to EXMC_NOEx high setup time	21.4	-	ns
$t_{h(DATA_NOE)}$	Data hold time after EXMC_NOE high	0	-	ns
$t_{h(DATA_NE)}$	Data hold time after EXMC_NEx high	0	-	ns
$t_{v(NADV_NE)}$	EXMC_NEx low to EXMC_NADV low	0	-	ns
$t_{w(NADV)}$	EXMC_NADV low time	4.6	6.6	ns

(1) C_L = 30 pF.
(2) Guaranteed by design, not tested in production.
(3) Based on configure: f_{HCLK} = 180 MHz, AddressSetupTime = 0, AddressHoldTime = 1, DataSetupTime = 1.

Table 4-46. Asynchronous non-multiplexed SRAM/PSRAM/NOR write timings(1)(2)(3)

Symbol	Parameter	Min	Max	Unit
$t_{w(NE)}$	EXMC_NE low time	15.8	17.8	ns
$t_{V(NWE_NE)}$	EXMC_NEx low to EXMC_NWE low	4.6	-	ns
$t_{w(NWE)}$	EXMC_NWE low time	4.6	6.6	ns
$t_{h(NE_NWE)}$	EXMC_NWE high to EXMC_NE high hold time	4.6	6.6	ns
$t_{v(A_NE)}$	EXMC_NEx low to EXMC_A valid	0	-	ns
$t_{V(NADV_NE)}$	EXMC_NEx low to EXMC_NADV low	0	-	ns
$t_{w(NADV)}$	EXMC_NADV low time	4.6	6.6	ns
$t_{h(AD_NADV)}$	EXMC_AD(address) valid hold time after EXMC_NADV high	10.2	-	ns
$t_{h(A_NWE)}$	Address hold time after EXMC_NWE high	4.6	-	ns
$t_{h(BL_NWE)}$	EXMC_BL hold time after EXMC_NWE high	4.6	-	ns
$t_{v(BL_NE)}$	EXMC_NEx low to EXMC_BL valid	15.8	17.8	ns
$t_{v(DATA_NADV)}$	EXMC_NADV high to DATA valid	4.6	-	ns
$t_{h(DATA_NWE)}$	Data hold time after EXMC_NWE high	4.6	6.6	ns

(1) C_L = 30 pF.
(2) Guaranteed by design, not tested in production.
(3) Based on configure: f_{HCLK} = 180 MHz, AddressSetupTime = 0, AddressHoldTime = 1, DataSetupTime = 1.

Table 4-47. Asynchronous multiplexed PSRAM/NOR read timings(1)(2)(3)

Symbol	Parameter	Min	Max	Unit
$t_{w(NE)}$	EXMC_NE low time	38.2	40.2	ns
$t_{V(NOE_NE)}$	EXMC_NEx low to EXMC_NOE low	15.8	-	ns
$t_{w(NOE)}$	EXMC_NOE low time	21.4	23.4	ns
$t_{h(NE_NOE)}$	EXMC_NOE high to EXMC_NE high hold time	0	-	ns
$t_{v(A_NE)}$	EXMC_NEx low to EXMC_A valid	0	-	ns
$t_{v(A_NOE)}$	Address hold time after EXMC_NOE high	0	-	ns
$t_{v(BL_NE)}$	EXMC_NEx low to EXMC_BL valid	0	-	ns
$t_{h(BL_NOE)}$	EXMC_BL hold time after EXMC_NOE high	0	-	ns
$t_{su(DATA_NE)}$	Data to EXMC_NEx high setup time	22.4	-	ns
$t_{su(DATA_NOE)}$	Data to EXMC_NOEx high setup time	22.4	-	ns
$t_{h(DATA_NOE)}$	Data hold time after EXMC_NOE high	0	-	ns
$t_{h(DATA_NE)}$	Data hold time after EXMC_NEx high	0	-	ns
$t_{v(NADV_NE)}$	EXMC_NEx low to EXMC_NADV low	0	-	ns
$t_{w(NADV)}$	EXMC_NADV low time	4.6	6.6	ns
$T_{h(AD_NADV)}$	EXMC_AD(adress) valid hold time after EXMC_NADV high	4.6	6.6	ns

(1) C_L = 30 pF.
(2) Guaranteed by design, not tested in production.
(3) Based on configure: f_{HCLK} = 180 MHz, AddressSetupTime = 0, AddressHoldTime = 1, DataSetupTime = 1.

Table 4-48. Asynchronous multiplexed PSRAM/NOR write timings (1)(2)(3)

Symbol	Parameter	Min	Max	Unit
$t_{w(NE)}$	EXMC_NE low time	27	29	ns

$t_{V(NWE_NE)}$	EXMC_NEx low to EXMC_NWE low	7.3	-	ns
$t_{w(NWE)}$	EXMC_NWE low time	15.8	17.8	ns
$t_{h(NE_NWE)}$	EXMC_NWE high to EXMC_NE high hold time	4.6	-	ns
$t_{v(A_NE)}$	EXMC_NEx low to EXMC_A valid	0	-	ns
$t_{V(NADV_NE)}$	EXMC_NEx low to EXMC_NADV low	0	-	ns
$t_{w(NADV)}$	EXMC_NADV low time	4.6	6.6	ns
$t_{h(AD_NADV)}$	EXMC_AD(address) valid hold time after EXMC_NADV high	4.6	-	ns
$t_{h(A_NWE)}$	Address hold time after EXMC_NWE high	4.6	-	ns
$t_{h(BL_NWE)}$	EXMC_BL hold time after EXMC_NWE high	4.6	-	ns
$t_{v(BL_NE)}$	EXMC_NEx low to EXMC_BL valid	0	-	ns
$t_{v(DATA_NADV)}$	EXMC_NADV high to DATA valid	4.6	-	ns
$t_{h(DATA_NWE)}$	Data hold time after EXMC_NWE high	4.6	-	ns

(1) C_L = 30 pF.
(2) Guaranteed by design, not tested in production.
(3) Based on configure: f_{HCLK} = 180 MHz, AddressSetupTime = 0, AddressHoldTime = 1, DataSetupTime = 1.

Table 4-49. Synchronous multiplexed PSRAM/NOR read timings(1)(2)(3)

Symbol	Parameter	Min	Max	Unit
$t_{w(CLK)}$	EXMC_CLK period	22.4	-	ns
$t_{d(CLKL-NExL)}$	EXMC_CLK low to EXMC_NEx low	0	-	ns
$t_{d(CLKH-NExH)}$	EXMC_CLK high to EXMC_NEx high	10.2	-	ns
$t_{d(CLKL-NADVL)}$	EXMC_CLK low to EXMC_NADV low	0	-	ns
$t_{d(CLKL-NADVH)}$	EXMC_CLK low to EXMC_NADV high	0	-	ns
$t_{d(CLKL-AV)}$	EXMC_CLK low to EXMC_Ax valid	0	-	ns
$t_{d(CLKH-AIV)}$	EXMC_CLK high to EXMC_Ax invalid	10.2	-	ns
$t_{d(CLKL-NOEL)}$	EXMC_CLK low to EXMC_NOE low	0	-	ns
$t_{d(CLKH-NOEH)}$	EXMC_CLK high to EXMC_NOE high	10.2	-	ns
$t_{d(CLKL-ADV)}$	EXMC_CLK low to EXMC_AD valid	0	-	ns
$t_{d(CLKL-ADIV)}$	EXMC_CLK low to EXMC_AD invalid	0	-	ns

(1) C_L = 30 pF.
(2) Guaranteed by design, not tested in production.
(3) Based on configure: f_{HCLK} = 180 MHz, BurstAccessMode = Enable; Memory Type = PSRAM; WriteBurst = Enable; CLKDivision = 3 (EXMC_CLK is 4 divided by HCLK); Data Latency = 1.

Table 4-50. Synchronous multiplexed PSRAM write timings(1)(2)(3)

Symbol	Parameter	Min	Max	Unit
$t_{w(CLK)}$	EXMC_CLK period	22.4	-	ns
$t_{d(CLKL-NExL)}$	EXMC_CLK low to EXMC_NEx low	0	-	ns
$t_{d(CLKH-NExH)}$	EXMC_CLK high to EXMC_NEx high	10.2	-	ns
$t_{d(CLKL-NADVL)}$	EXMC_CLK low to EXMC_NADV low	0	-	ns
$t_{d(CLKL-NADVH)}$	EXMC_CLK low to EXMC_NADV high	0	-	ns
$t_{d(CLKL-AV)}$	EXMC_CLK low to EXMC_Ax valid	0	-	ns
$t_{d(CLKH-AIV)}$	EXMC_CLK high to EXMC_Ax invalid	10.2	-	ns
$t_{d(CLKL-NWEL)}$	EXMC_CLK low to EXMC_NWE low	0	-	ns
$t_{d(CLKH-NWEH)}$	EXMC_CLK high to EXMC_NWE high	10.2	-	ns

Symbol	Parameter	Min	Max	Unit
$t_{d(CLKL-ADIV)}$	EXMC_CLK low to EXMC_AD invalid	0	-	ns
$t_{d(CLKL-DATA)}$	EXMC_A/D valid data after EXMC_CLK low	0	-	ns
$t_{h(CLKL-NBLH)}$	EXMC_CLK low to EXMC_NBL high	0	-	ns

(1) C_L = 30 pF.
(2) Guaranteed by design, not tested in production.
(3) Based on configure: f_{HCLK} = 180 MHz, BurstAccessMode = Enable; MemoryType = PSRAM; WriteBurst = Enable; CLKDivision = 3 (EXMC_CLK is 4 divided by HCLK); DataLatency = 1.

Table 4-51. Synchronous non-multiplexed PSRAM/NOR read timings(1)(2)(3)

Symbol	Parameter	Min	Max	Unit
$t_{w(CLK)}$	EXMC_CLK period	22.4	-	ns
$t_{d(CLKL-NExL)}$	EXMC_CLK low to EXMC_NEx low	0	-	ns
$t_{d(CLKH-NExH)}$	EXMC_CLK high to EXMC_NEx high	10.2	-	ns
$t_{d(CLKL-NADVL)}$	EXMC_CLK low to EXMC_NADV low	0	-	ns
$t_{d(CLKL-NADVH)}$	EXMC_CLK low to EXMC_NADV high	0	-	ns
$t_{d(CLKL-AV)}$	EXMC_CLK low to EXMC_Ax valid	0	-	ns
$t_{d(CLKH-AIV)}$	EXMC_CLK high to EXMC_Ax invalid	10.2	-	ns
$t_{d(CLKL-NOEL)}$	EXMC_CLK low to EXMC_NOE low	0	-	ns
$t_{d(CLKH-NOEH)}$	EXMC_CLK high to EXMC_NOE high	10.2	-	ns

(1) C_L = 30 pF.
(2) Guaranteed by design, not tested in production.
(3) Based on configure: HCLK=180 MHz, BurstAccessMode = Enable; MemoryType = PSRAM; WriteBurst = Enable; CLKDivision = 3 (EXMC_CLK is 4 divided by HCLK); DataLatency = 1.

Table 4-52. Synchronous non-multiplexed PSRAM write timings(1)(2)(3)

Symbol	Parameter	Min	Max	Unit
$t_{w(CLK)}$	EXMC_CLK period	22.4	-	ns
$t_{d(CLKL-NExL)}$	EXMC_CLK low to EXMC_NEx low	0	-	ns
$t_{d(CLKH-NExH)}$	EXMC_CLK high to EXMC_NEx high	10.2	-	ns
$t_{d(CLKL-NADVL)}$	EXMC_CLK low to EXMC_NADV low	0	-	ns
$t_{d(CLKL-NADVH)}$	EXMC_CLK low to EXMC_NADV high	0	-	ns
$t_{d(CLKL-AV)}$	EXMC_CLK low to EXMC_Ax valid	0	-	ns
$t_{d(CLKH-AIV)}$	EXMC_CLK high to EXMC_Ax invalid	10.2	-	ns
$t_{d(CLKL-NWEL)}$	EXMC_CLK low to EXMC_NWE low	0	-	ns
$t_{d(CLKH-NWEH)}$	EXMC_CLK high to EXMC_NWE high	10.2	-	ns
$t_{d(CLKL-DATA)}$	EXMC_A/D valid data after EXMC_CLK low	0	-	ns
$t_{h(CLKL-NBLH)}$	EXMC_CLK low to EXMC_NBL high	0	-	ns

(1) C_L = 30 pF.
(2) Guaranteed by design, not tested in production.
(3) Based on configure: HCLK = 180 MHz, BurstAccessMode = Enable; MemoryType = PSRAM; WriteBurst = Enable; CLKDivision = 3 (EXMC_CLK is 4 divided by HCLK); DataLatency = 1.

4.23. Serial/Quad Parallel Interface (SQPI) characteristics

Table 4-53.SQPI characteristics

Symbol	Parameter	Min	Typ	Max	Unit
t_{CLK}(2)	CLK period	11.0(4)	-	-	ns
t_{CD}(2)	CLK high level duty for even clock divided	45	50	55	%
	CLK high level duty for odd clock divided	45	-	71	
t_{KHKL}(3)	CLK rise or fall time	-	-	3	ns
t_{CPH}(2)	CE# high between subsequent burst operations	22.2	-	-	ns
t_{CEM}(2)	CE# low pulse width	88.8	-	-	ns
t_{CSP}(2)	CE# setup time to CLK rising edge	5.5	-	177.7	ns
t_{CHD}(2)	CE# hold time from CLK rising edge	5.5	-	177.7	ns
t_{SP}(2)	Setup time to active CLK edge	5.5	-	177.7	ns
t_{HD}(2)	Hold time from active CLK edge	5.5	-	177.7	ns
t_{HZ}(2)	CE# rise to data output high-Z	-	0	-	ns
t_{ACLK}(2)	CLK fall to data output valid delay	-	0	-	ns
t_{KOH}(2)	Data hold time from CLK falling edge	-	0	-	ns

(1) Based on characterization, not tested in production.
(2) Guaranteed by design, not tested in production.
(3) Output driven mode is 50 MHz. Measured from 10% to 90% of VDD.
(4) This is designed minimal period. The operating minimal clock period is 22.2 ns(45 MHz = 180 MHz/4).

4.24. Super High-resolution Timer (SHRTIMER) characteristics

Table 4-54. SHRTIMER characteristics(1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$f_{SHRTIMER}$	SHRTIMER input clock for DLL	Under T_A conditions	-	180	-	MHz
$t_{SHRTIMER}$			-	5.56	-	ns
$t_{res(SHRTIMER)}$	Timer resolution time	f_{HPMER} = 180 MHz	-	86.8	-	ps
$RES_{SHRTIMER}$	Timer resolution	-	-	-	16	bit
t_{DTG}	Dead time generator clock period	-	1/64	-	16	$t_{SHRTIMER}$
		$f_{SHRTIMER}$ = 180 MHz	0.0868	-	88.89	ns
$\|t_{DTR}\|$ / $\|t_{DTF}\|$	Dead time range (absolute value)	-	-	-	2^16-1	t_{DTG}
		$f_{SHRTIMER}$ = 180 MHz	-	-	5825.41	µs
f_{CHPFRQ}	Chopper stage clock frequency	-	1/256	-	1/16	$f_{SHRTIMER}$
		$f_{SHRTIMER}$ = 180 MHz	0.703	-	11.25	MHz
t_{1STPW}	Chopper first pulse length	-	16	-	256	$t_{SHRTIMER}$
		$f_{SHRTIMER}$ = 180 MHz	0.089	-	1.42	µs

(1) Guaranteed by design, not tested in production.

Table 4-55. SHRTIMER output response to fault protection(1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$t_{LAT(DF)}$	Digital fault response latency	Propagation delay from SHRTIMER_FLTx digital input to SHRTIMER_STxCHy output pin	-	-	25	ns
$t_{W(FLT)}$	Minimum fault pulse width	-	11	-	-	
$t_{LAT(AF)}$	Analog fault response latency	Propagation delay from comparator CMPx_IPx input to SHRTIMER_STxCHy output pin	-	-	35	

(1) Guaranteed by design, not tested in production.

Table 4-56. SHRTIMER output response to external 1 to 10(Synchronous mode(1))

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$T_{PROP(SHRTIMER)}$	External event response latency in SHRTIMER	SHRTIMER internal propagation delay(3)	5	-	6	$t_{SHRTIMER}$(2)
$t_{LAT(DEEV)}$	Digital external event response latency	Propagation delay from SHRTIMER_EXEVx digital input to SHRTIMER_STxCHy output pin(30pF load)	-	-	48	ns
$t_{W(FLT)}$	Minimum external event pulse width	-	11	-	-	
$t_{LAT(AEEV)}$	Analog external event response latency	Propagation delay from comparator CMPx_IPx input pin to SHRTIMER_STxCHy output pin(30pF load)	-	-	60	
$T_{JIT(EEV)}$	External event response jitter	Jitter of the delay from SHRTIMER_EXEVx digital input or CMPx_IPx input pin to SHRTIMER_STxCHy output pin(30pF load)	-	-	1	$t_{SHRTIMER}$(2)
$T_{JIT(PW)}$	Jitter on output pulse width in response to an external event	-	-	-	0	$t_{SHRTIMER}$(2)

(1) Guaranteed by design, not tested in production.

(2) $t_{SHRTIMER} = 1 / f_{SHRTIMER}$ with $f_{SHRTIMER}$ = 180 MHz depending on the clock controller configuration.

(3) This parameter does not take into account latency introduced by GPIO or comparator.

Table 4-57. SHRTIMER synchronization input / output(1)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$t_{W(SYNCIN)}$	Minimum pulse width on SYNCIN inputs, including SHRTIMER_SCIN	-	2	-	-	$t_{SHRTIMER}$(2)
$t_{LAT(DF)}$	Response time to external synchronization request	-	-	-	1	$t_{SHRTIMER}$(2)
$t_{W(AF)}$	Pulse width on SHRTIMER_SCOUT output	-	-	16	-	$t_{SHRTIMER}$(2)
		$f_{SHRTIMER}$ = 180 MHz	-	88.89	-	ns

(1) Guaranteed by design, not tested in production.

4.25. TIMER characteristics

Table 4-58. TIMER characteristics(1)

Symbol	Parameter	Conditions	Min	Max	Unit
t_{res}	Timer resolution time	-	1	-	$t_{TIMERxCLK}$
		$f_{TIMERxCLK}$ = 180 MHz	5.6	-	ns
f_{EXT}	Timer external clock frequency	-	0	$f_{TIMERxCLK}$/2	MHz
		$f_{TIMERxCLK}$ = 180 MHz	0	90	MHz
RES	Timer resolution	TIMERx (except TIMER1)	-	16	bit
		TIMER1	-	32	
$t_{COUNTER}$	16-bit counter clock period when internal clock is selected	-	1	65536	$t_{TIMERxCLK}$
		$f_{TIMERxCLK}$ = 180 MHz	0.0056	364.1	μs
	32-bit counter clock period when internal clock is selected (only TIMER1)	-	1	2^{32}	$t_{TIMERxCLK}$
		$f_{TIMERxCLK}$ = 180 MHz	0.0056	23.86	s
t_{MAX_COUNT}	Maximum possible count (except TIMER1)	-	-	$2^{16} \times 2^{16}$	$t_{TIMERxCLK}$
		$f_{TIMERxCLK}$ = 180 MHz	-	23.86	s
	Maximum possible count (only TIMER1)	-	-	$2^{16} \times 2^{32}$	$t_{TIMERxCLK}$
		$f_{TIMERxCLK}$ = 180 MHz	-	2^{16} x 23.86	s

(1) Guaranteed by design, not tested in production.

4.26. WDGT characteristics

Table 4-59. FWDGT min/max timeout period at 40 kHz (IRC40K)(1)

Prescaler divider	PSC[2:0] bits	Min timeout RLD[11:0] = 0x000	Max timeout RLD[11:0] = 0xFFF	Unit
1/4	000	0.025	409.525	ms
1/8	001	0.025	819.025	
1/16	010	0.025	1638.025	
1/32	011	0.025	3276.025	
1/64	100	0.025	6552.025	
1/128	101	0.025	13104.025	
1/256	110 or 111	0.025	26208.025	

(1) Guaranteed by design, not tested in production.

Table 4-60. WWDGT min-max timeout value at 90 MHz (f_{PCLK1})(1)

Prescaler divider	PSC[1:0]	Min timeout value CNT[6:0] = 0x40	Unit	Max timeout value CNT[6:0] = 0x7F	Unit
1/1	00	45.51	µs	2.91	ms
1/2	01	91.02		5.83	
1/4	10	182.04		11.65	
1/8	11	364.08		23.30	

(1) Guaranteed by design, not tested in production.

4.27. Parameter condition

Unless otherwise specified, all values given for V_{DD} = V_{DDA} = 3.3 V, T_A = 25 °C.

5. Package information

5.1. LQFP144 package outline dimensions

Figure 5-1. LQFP144 package outline


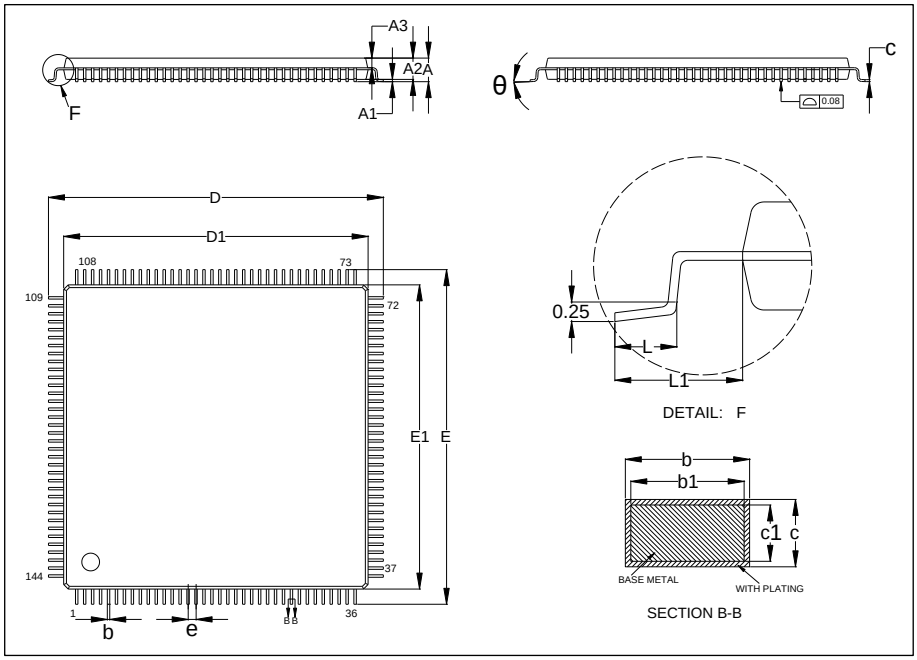


Table 5-1. LQFP144 package dimensions

Symbol	Min	Typ	Max
A	-	-	1.60
A1	0.05	-	0.15
A2	1.35	1.40	1.45
A3	0.59	0.64	0.69
b	0.18	-	0.26
b1	0.17	0.20	0.23
c	0.13	-	0.17
c1	0.12	0.13	0.14
D	21.80	22.00	22.20
D1	19.90	20.00	20.10
E	21.80	22.00	22.20
E1	19.90	20.00	20.10
e	-	0.50	-
L	0.45	-	0.75
L1	-	1.00	-
θ	0°	-	7°

(Original dimensions are in millimeters)

Figure 5-2. LQFP144 recommended footprint

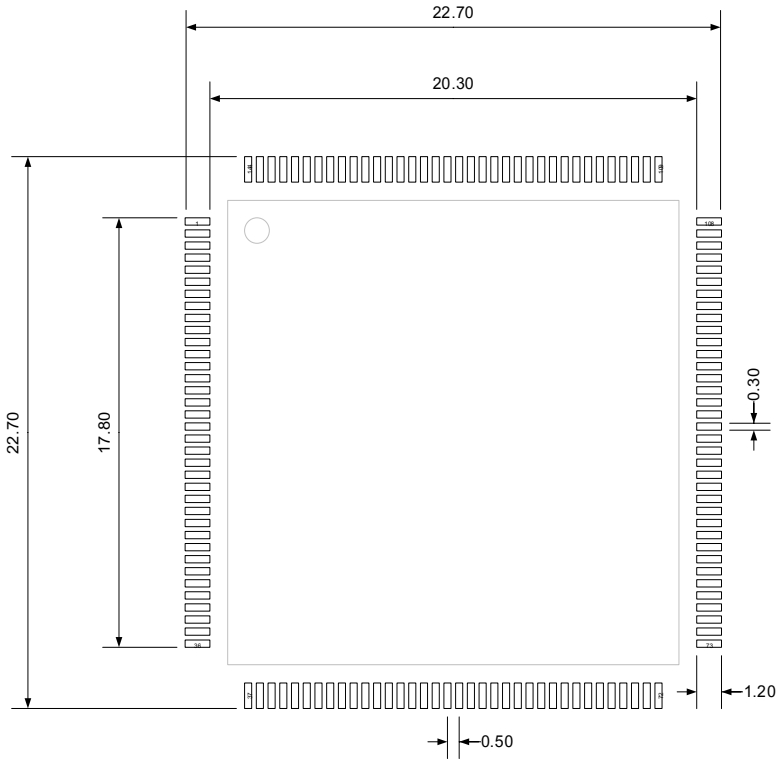

(Original dimensions are in millimeters)

5.2. LQFP100 package outline dimensions

Figure 5-3. LQFP100 package outline


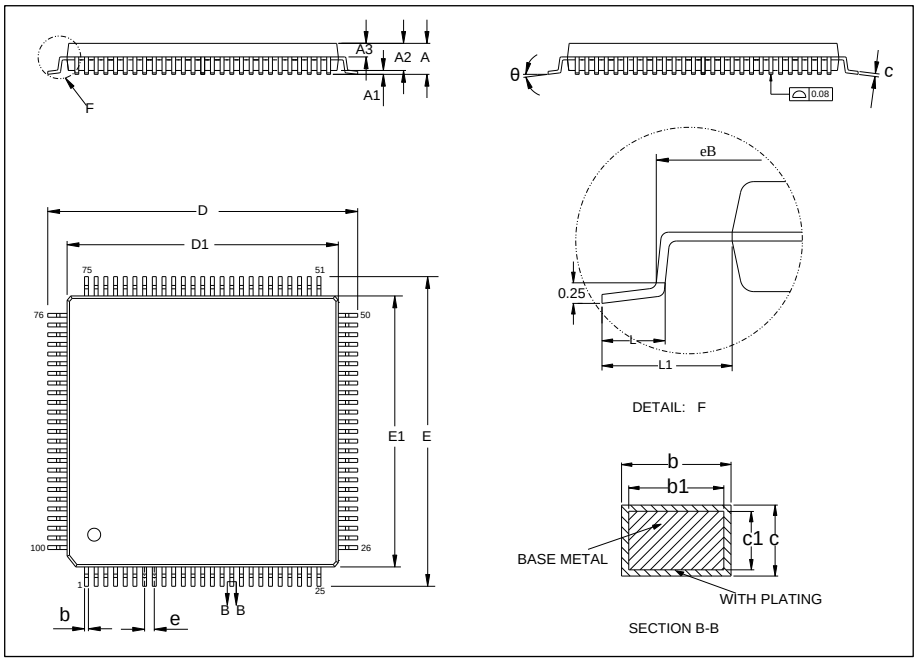


Table 5-2. LQFP100 package dimensions

Symbol	Min	Typ	Max
A	-	-	1.60
A1	0.05	-	0.15
A2	1.35	1.40	1.45
A3	0.59	0.64	0.69
b	0.18	-	0.26
b1	0.17	0.20	0.23
c	0.13	-	0.17
c1	0.12	0.13	0.14
D	15.80	16.00	16.20
D1	13.90	14.00	14.10
E	15.80	16.00	16.20
E1	13.90	14.00	14.10
e	-	0.50	-
eB	15.05	-	15.35
L	0.45	-	0.75
L1	-	1.00	-
θ	0°	-	7°

(Original dimensions are in millimeters)

Figure 5-4. LQFP100 recommended footprint

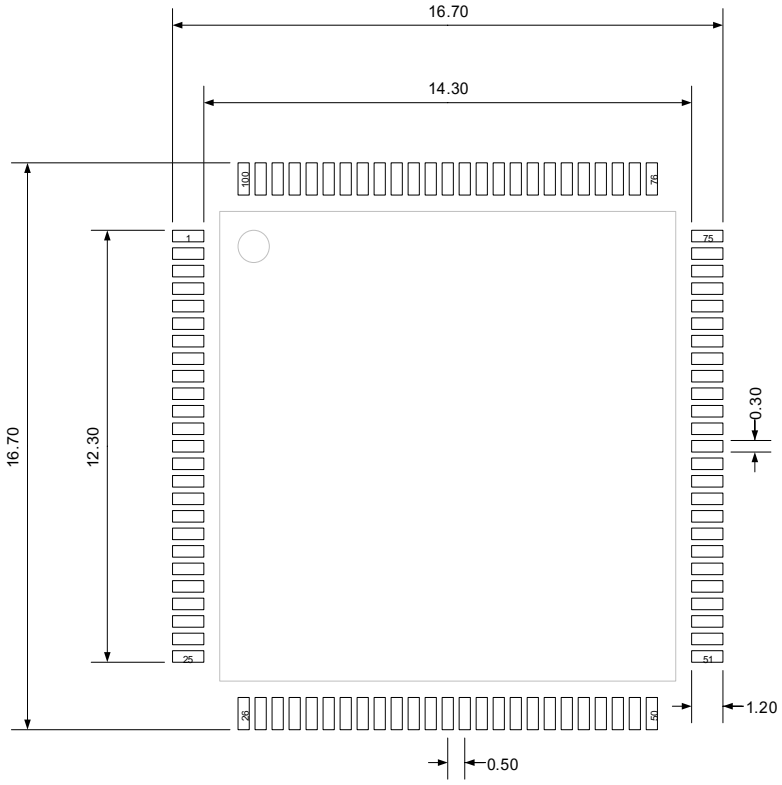

(Original dimensions are in millimeters)

5.3. LQFP64 package outline dimensions

Figure 5-5. LQFP64 package outline


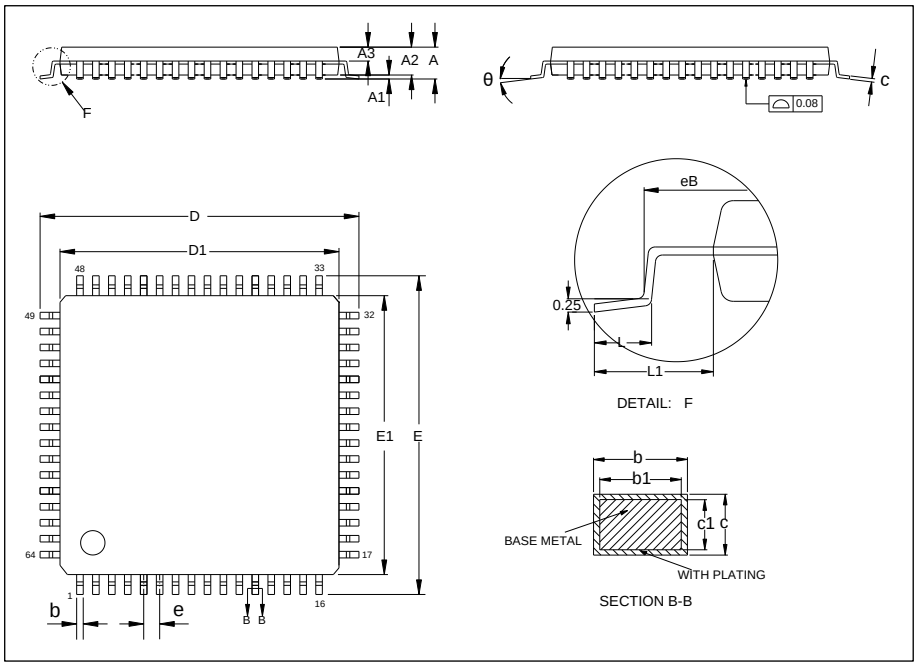


Table 5-3. LQFP64 package dimensions

Symbol	Min	Typ	Max
A	-	-	1.60
A1	0.05	-	0.15
A2	1.35	1.40	1.45
A3	0.59	0.64	0.69
b	0.18	-	0.26
b1	0.17	0.20	0.23
c	0.13	-	0.17
c1	0.12	0.13	0.14
D	11.80	12.00	12.20
D1	9.90	10.00	10.10
E	11.80	12.00	12.20
E1	9.90	10.00	10.10
e	-	0.50	-
eB	11.25	-	11.45
L	0.45	-	0.75
L1	-	1.00	-
θ	0°	-	7°

(Original dimensions are in millimeters)

Figure 5-6. LQFP64 recommended footprint

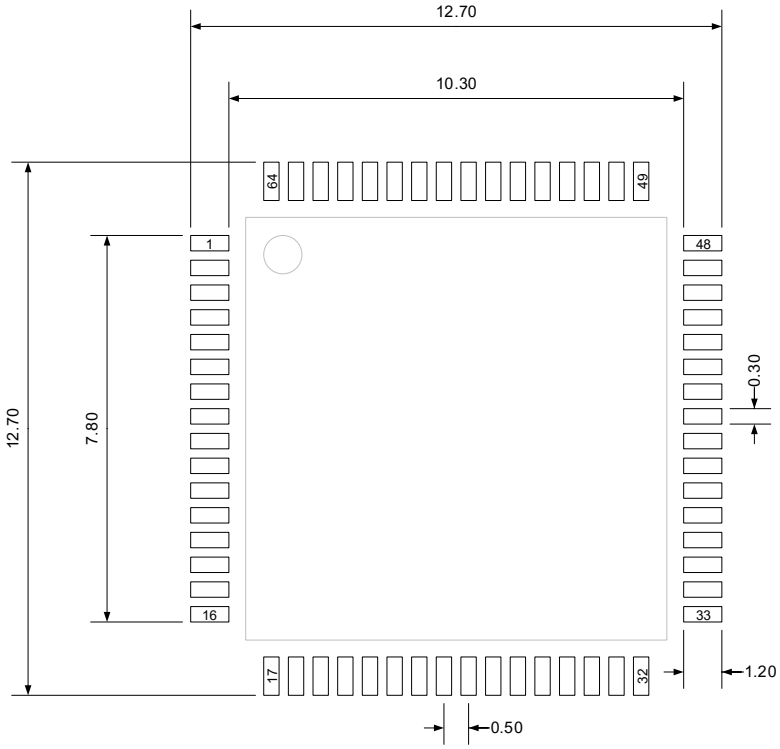

(Original dimensions are in millimeters)

5.4. LQFP48 package outline dimensions

Figure 5-7. LQFP48 package outline


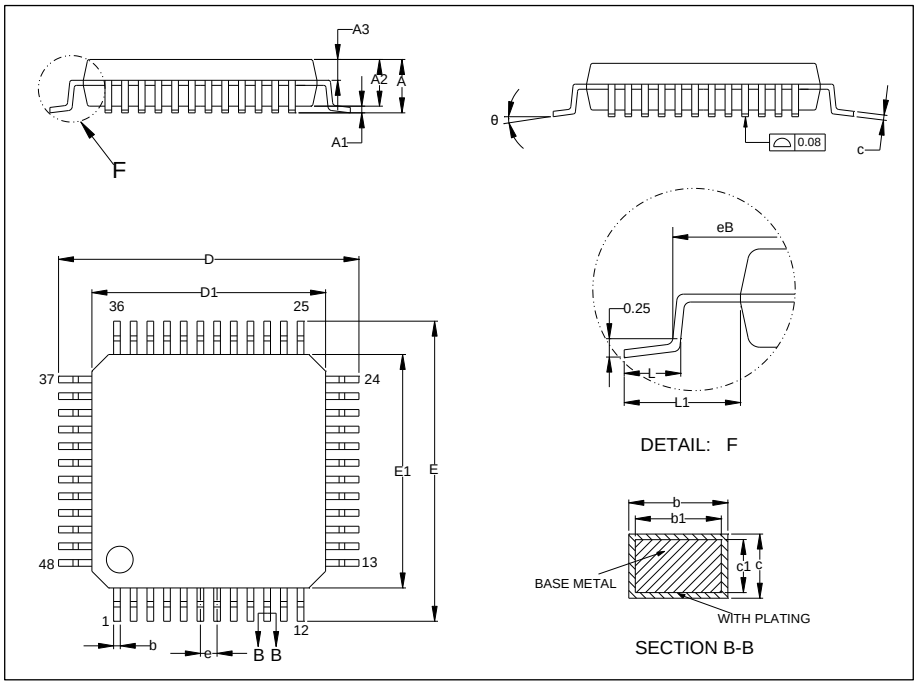


Table 5-4. LQFP48 package dimensions

Symbol	Min	Typ	Max
A	-	-	1.60
A1	0.05	-	0.15
A2	1.35	1.40	1.45
A3	0.59	0.64	0.69
b	0.18	-	0.26
b1	0.17	0.20	0.23
c	0.13	-	0.17
c1	0.12	0.13	0.14
D	8.80	9.00	9.20
D1	6.90	7.00	7.10
E	8.80	9.00	9.20
E1	6.90	7.00	7.10
e	-	0.50	-
eB	8.10	-	8.25
L	0.45	-	0.75
L1	-	1.00	-
θ	0°	-	7°

(Original dimensions are in millimeters)

Figure 5-8. LQFP48 recommended footprint

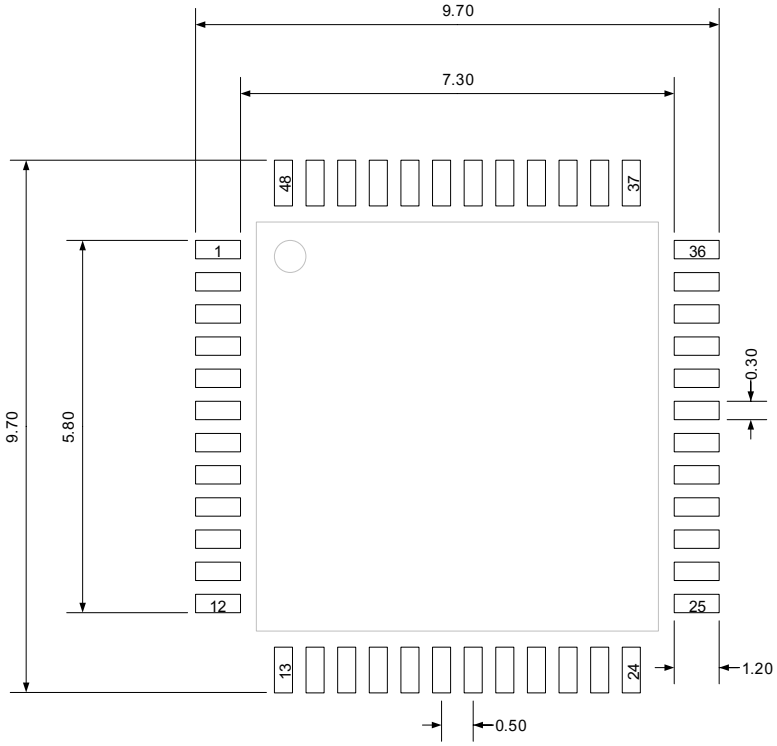

(Original dimensions are in millimeters)

5.5. QFN48 package outline dimensions

Figure 5-9. QFN48 package outline


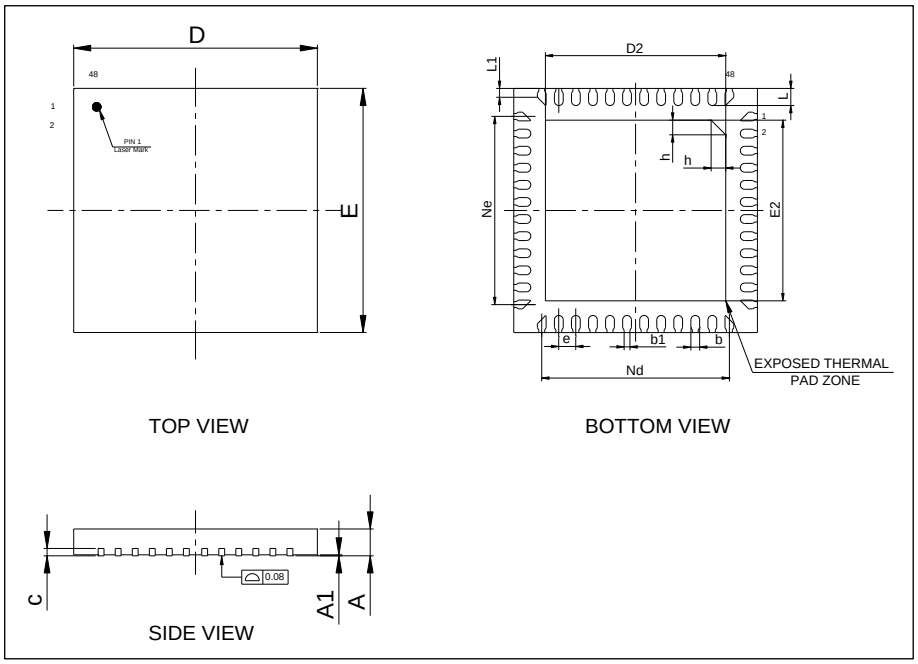


Table 5-5. QFN48 package dimensions

Symbol	Min	Typ	Max
A	0.50	0.55	0.60
A1	0	0.02	0.05
b	0.13	0.18	0.23
b1	-	0.12	-
c	0.10	0.15	0.20
D	4.90	5.00	5.10
D2	3.60	3.70	3.80
E	4.90	5.00	5.10
E2	3.60	3.70	3.80
e	-	0.35	-
h	0.25	0.30	0.35
L	0.30	0.35	0.40
L1	0.13	0.18	0.23
Nd	-	3.85	-
Ne	-	3.85	-

(Original dimensions are in millimeters)

Figure 5-10. QFN48 recommended footprint

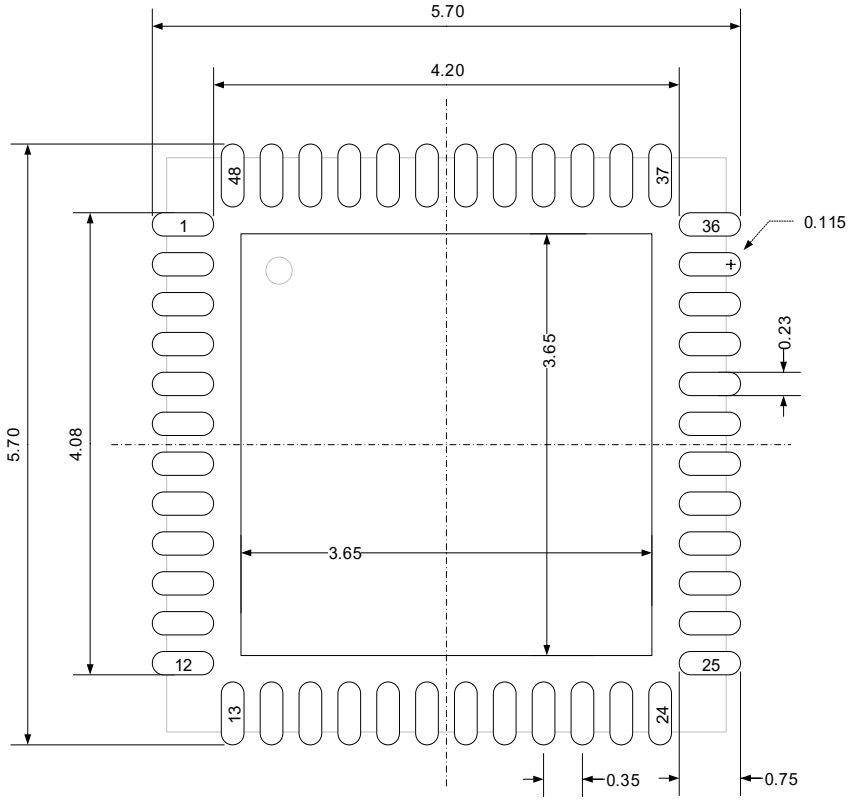

(Original dimensions are in millimeters)

5.6. Thermal characteristics

Thermal resistance is used to characterize the thermal performance of the package device, which is represented by the Greek letter " θ ". For semiconductor devices, thermal resistance represents the steady-state temperature rise of the chip junction due to the heat dissipated on the chip surface.

θ_{JA}: Thermal resistance, junction-to-ambient.

θ_{JB}: Thermal resistance, junction-to-board.

θ_{JC}: Thermal resistance, junction-to-case.

Ψ_{JB}: Thermal characterization parameter, junction-to-board.

Ψ_{JT}: Thermal characterization parameter, junction-to-top center.

$$\theta_{JA}=(T_J-T_A)/P_D \quad (5\text{-}1)$$

$$\theta_{JB}=(T_J-T_B)/P_D \quad (5\text{-}2)$$

$$\theta_{JC}=(T_J-T_C)/P_D \quad (5\text{-}3)$$

Where, T_J = Junction temperature.

T_A = Ambient temperature

T_B = Board temperature

T_C = Case temperature which is monitoring on package surface

P_D = Total power dissipation

θ_{JA} represents the resistance of the heat flows from the heating junction to ambient air. It is an indicator of package heat dissipation capability. Lower θ_{JA} can be considerate as better overall thermal performance. θ_{JA} is generally used to estimate junction temperature.

θ_{JB} is used to measure the heat flow resistance between the chip surface and the PCB board.

θ_{JC} represents the thermal resistance between the chip surface and the package top case. θ_{JC} is mainly used to estimate the heat dissipation of the system (using heat sink or other heat dissipation methods outside the device package).

Table 5-6. Package thermal characteristics(1)

Symbol	Condition	Package	Value	Unit
θ_{JA}	Natural convection, 2S2P PCB	LQFP144	48.76	°C/W
		LQFP100	49.18	
		LQFP64	54.57	
		LQFP48	69.64	
		QFN48	47.85	
θ_{JB}	Cold plate, 2S2P PCB	LQFP144	35.00	°C/W
		LQFP100	22.70	

Symbol	Condition	Package	Value	Unit
		LQFP64	35.08	
		LQFP48	43.16	
		QFN48	17.97	
θ_{JC}	Cold plate, 2S2P PCB	LQFP144	12.03	°C/W
		LQFP100	12.52	
		LQFP64	18.11	
		LQFP48	25.36	
		QFN48	16.85	
Ψ_{JB}	Natural convection, 2S2P PCB	LQFP144	35.32	°C/W
		LQFP100	32.85	
		LQFP64	35.41	
		LQFP48	47.75	
		QFN48	18.15	
Ψ_{JT}	Natural convection, 2S2P PCB	LQFP144	1.86	°C/W
		LQFP100	0.53	
		LQFP64	1.10	
		LQFP48	2.45	
		QFN48	1.55	

(1) Thermal characteristics are based on simulation, and meet JEDEC specification.

6. Ordering information

Table 6-1. Part ordering code for GD32E503xx devices

Ordering code	Flash (KB)	Package	Package type	Temperature operating range
GD32E503ZET6	512	LQFP144	Green	Industrial -40°C to +85°C
GD32E503ZCT6	256	LQFP144	Green	Industrial -40°C to +85°C
GD32E503VET6	512	LQFP100	Green	Industrial -40°C to +85°C
GD32E503VCT6	256	LQFP100	Green	Industrial -40°C to +85°C
GD32E503RET6	512	LQFP64	Green	Industrial -40°C to +85°C
GD32E503RCT6	256	LQFP64	Green	Industrial -40°C to +85°C
GD32E503CET6	512	LQFP48	Green	Industrial -40°C to +85°C
GD32E503CET7	512	LQFP48	Green	Industrial -40°C to +105°C
GD32E503CCT6	256	LQFP48	Green	Industrial -40°C to +85°C
GD32E503CCT7	256	LQFP48	Green	Industrial -40°C to +105°C
GD32E503CEO7	512	QFN48	Green	Industrial -40°C to +105°C

7. Revision history

Table 7-1. Revision history

Revision No.	Description	Date
1.0	Initial Release	Feb.28, 2020
1.1	1. Module information modification, refers to ***Functional description***.	Aug.28, 2020
1.2	1. Modify boot pins in chapter ***Boot modes***; 2. Modify boot loader address in chapter ***Memory map***; 3. Add deep-sleep 1 and deep-sleep 2 mode power consumption data, refers to ***Power consumption***, and modify the LDO mode conditions; 4. Electrical characteristics table update, refers to ***Electrical characteristics***.	Dec.7, 2020
1.3	1. Add CAN module related information. 2. Modify I2C and SPI timing diagrams, refers to ***I2C characteristics*** and ***SPI characteristics***. 3. CAN module description modification, refers to ***Controller area network (CAN)***.	Mar.24, 2021
1.4	1. Delete the OSCIN from PD0 remap information in chapter 2.6, and delete OSCOUT from PD1 remap information in chapter 2.6, and delete PD0 / PD1 from OSCIN / OSCOUT remap information in chapter 2.6.3 and 2.6.4, delete ETM related functions in chapter 2.6, refers to ***Pin definitions***. 2. Modify pinouts, refers to ***Pinouts and pin assignment***. 3. Update SPI and I2S timing diagrams, refers to ***SPI characteristics*** and ***I2S characteristics***. 4. Update package information and ordering information, refers to ***Package information*** and ***Ordering information***.	Dec.14, 2021
1.5	1. Add P_D parameter in ***Table 4-1. Absolute maximum ratings(1)(4)*** . 2. Add EMI parameter, refers to ***Table 4-9. EMI characteristics(1)***. 3. Modify LQFP64 package information, refer to ***LQFP64 package outline dimensions***. 4. Update NRST external pin circuit, refer to ***Figure 4-4. Recommended external NRST pin circuit(1)*** . 5. Change parameters in DC operating conditions, refer to ***Table 4 2. DC operating conditions***. 6. EXMC related pin update, refer to ***Pin definitions***.	Jun.30, 2022

1.6	1. Pin name modification in ***Pin definitions*** and ***Pinouts and pin assignment***. 2. Add TRACESWO function to PB3 in ***Pin definitions***. 3. Modify PA11 and PA12 to non-5V tolerant pin. 4. Add comments to ***Power consumption***. 5. Modify ***I2C characteristics*** diagram ***Figure 4-6. I2C bus timing diagram***. 6. Modify ***Table 5-1. LQFP144 package dimensions*** parameter value.	Dec.6, 2022
1.7	1. Updated V_{DD} , V_{SSA} , V_{DDA} , V_{BAK} range from "1.62 to 3.6 V" to "1.71 to 3.63 V" in chapter 3.3.	Feb.28, 2023
1.8	1. The order information of GD32E503CCT7 was added in chapter 6.	Apr.24, 2023
1.9	1. Fixed SPI max frequency from 30 MHz to 22.5MHz in chapter 3.13. 2. Operation temperature range -40 to +105°C added for grade 7 devices.	Jul.11, 2023
2.0	1. Update the diagrams in chapter 2 and chapter 5. 2. Added the ability to drive the I/O current of the backup domain. 3. Added the OSCIN and OSCOUT remap information	Jan.05, 2024
2.1	1. High temperature series GD32E503CET7 and GD32E503CEO7(QFN48) added	Apr.25, 2024
2.2	1. Coplanarity information added for each packages in chapter 5 2. Maximum current for multiple IO information added in chapter 4.1	Jun.12, 2024
2.3	1. Chapter 1.14, added a note for VREFP and VDDA signal at power up. 2. Chapter 2.6, updated DAC_OUT0 / DAC_OUT1 to DAC0_OUT0 / DAC0_OUT1 in Pin definitions table. 3. Chapter 4.8, added f_{IRC40K} frequency for grade 7 devices	Nov.22, 2024
2.4	1. Chapter 3.14, Respectively added descriptions of the maximum speed for different USART channels.	Dec.27, 2024
2.5	1. Update DAC to DAC0 in ***Figure2-1 block diagram.*** 2. Deleted PLL1, PLL2, PLLUSB characteristics table from ***Chapter 4.9 PLL characteristics*** 3. Added V_{CORE} item into ***Table 4 2. DC operating conditions***., the typical value is 1.1V. 4. Modified the parameter descriptions of V_{ESD} and V_{FTB} in ***Table 4 8 EMS characteristics*** 5. Added V_{DD} / V_{DDA} / V_{REFP} / V_{REFN} parameters into ***Table 4-27 Temperature sensor characteristics.***	Jan.31, 2026

2.6	1. Correct the values of PE_{CYC} and t_{RET} in the T***able 4-22 Flash memory characteristics***.	Aug.02, 2026

Important Notice

This document is the property of GigaDevice Semiconductor Inc. and its subsidiaries (the "Company"). This document, including any product of the Company described in this document (the "Product"), is owned by the Company according to the laws of the People's Republic of China and other applicable laws. The Company reserves all rights under such laws and no Intellectual Property Rights are transferred (either wholly or partially) or licensed by the Company (either expressly or impliedly) herein. The names and brands of third party referred thereto (if any) are the property of their respective owner and referred to for identification purposes only.

To the maximum extent permitted by applicable law, the Company makes no representations or warranties of any kind, express or implied, with regard to the merchantability and the fitness for a particular purpose of the Product, nor does the Company assume any liability arising out of the application or use of any Product. Any information provided in this document is provided only for reference purposes. It is the sole responsibility of the user of this document to determine whether the Product is suitable and fit for its applications and products planned, and properly design, program, and test the functionality and safety of its applications and products planned using the Product. The Product is designed, developed, and/or manufactured for ordinary business, industrial, personal, and/or household applications only, and the Product is not designed or intended for use in (i) safety critical applications such as weapons systems, nuclear facilities, atomic energy controller, combustion controller, aeronautic or aerospace applications, traffic signal instruments, pollution control or hazardous substance management; (ii) life-support systems, other medical equipment or systems (including life support equipment and surgical implants); (iii) automotive applications or environments, including but not limited to applications for active and passive safety of automobiles (regardless of front market or aftermarket), for example, EPS, braking, ADAS (camera/fusion), EMS, TCU, BMS, BSG, TPMS, Airbag, Suspension, DMS, ICMS, Domain, ESC, DCDC, e-clutch, advanced-lighting, etc.. Automobile herein means a vehicle propelled by a self-contained motor, engine or the like, such as, without limitation, cars, trucks, motorcycles, electric cars, and other transportation devices; and/or (iv) other uses where the failure of the device or the Product can reasonably be expected to result in personal injury, death, or severe property or environmental damage (collectively "Unintended Uses"). Customers shall take any and all actions to ensure the Product meets the applicable laws and regulations. The Company is not liable for, in whole or in part, and customers shall hereby release the Company as well as its suppliers and/or distributors from, any claim, damage, or other liability arising from or related to all Unintended Uses of the Product. Customers shall indemnify and hold the Company, and its officers, employees, subsidiaries, affiliates as well as its suppliers and/or distributors harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of the Product.

Information in this document is provided solely in connection with the Product. The Company reserves the right to make changes, corrections, modifications or improvements to this document and the Product described herein at any time without notice. The Company shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2026 GigaDevice Semiconductor Inc. - All rights reserved